


ZYXEL

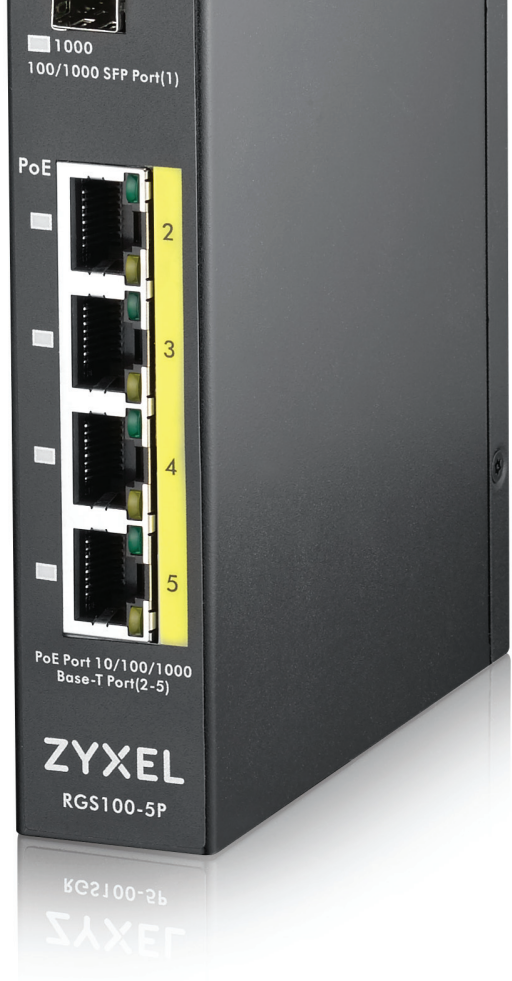

RGS100-5P

5-port GbE Unmanaged PoE Switch

Along with the complete commercial product portfolio that offers customers with total network solutions, Zyxel introduces the new RGS100-5P PoE switch with ruggedized design concepts to meet stringent outdoor or harsh network deployment scenarios. The wide operating temperature range ensures reliable performance in adverse environments and expands RGS100-5P's network availability in a wide variety of field applications.

Benefits

Rugged and reliable design for harsh environments

Designed with fanless and IP30 standard metal mechanism, the Zyxel RGS100-5P is able to deliver excellent thermal controls and withstand dusty environments and can be installed on either a DIN rail or wall mount for efficient use of cabinet space. In addition, wide-ranging operating temperature tolerance allows RGS100-5P to be deployed across a spectrum of harsh environments. Equipped with dual DC power inputs, the RGS100-5P is capable of high-availability operation and resilience under the most demanding conditions. When switching is applied normally in outdoor settings, ESD (electrostatic discharge) and DC surge protection prevent the loss of business revenue and productivity due to damage or fatigue caused by power disturbances.

Trouble-free installation and easy extendibility

This rugged unmanaged PoE switch comes with four (4) 10/100/1000 Base-T copper PoE ports and one (1) 100/1000-Base-X SFP fiber interface. The switch also supports the 802.3at PoE plus standard, with each PoE port providing up to 30W of power to efficiently accommodate the most power-hungry devices. The fiber uplink can extend the network to long-distance nodes up to 40 km (43,744 yards) away for added flexibility.

Datasheet [RGS100-5P](#)



Wide-ranging operating temperature design from -40°C to 75°C



Fanless design and compact mechanism with IP30 standard



All PoE ports support PoE+ and high PoE power budget up to 120 W



Dual power inputs (12 V - 58 V DC)




Limited lifetime warranty*

* Warranty terms, service availability, and service response times may vary from country or region to country or region


Plug-and-Play deployments

The Zyxel RGS100-5P is able to negotiate the optimal data speed and activate duplex mode automatically with N-Way feature. It can also detect the type of connection to any Ethernet device with support for auto-MDI/MDI-X. Broadcast storm protection can easily be activated via DIP switch. Plug-and-play makes deploying the RGS100-5P hassle-free for any application or scenario.

Applications Diagram

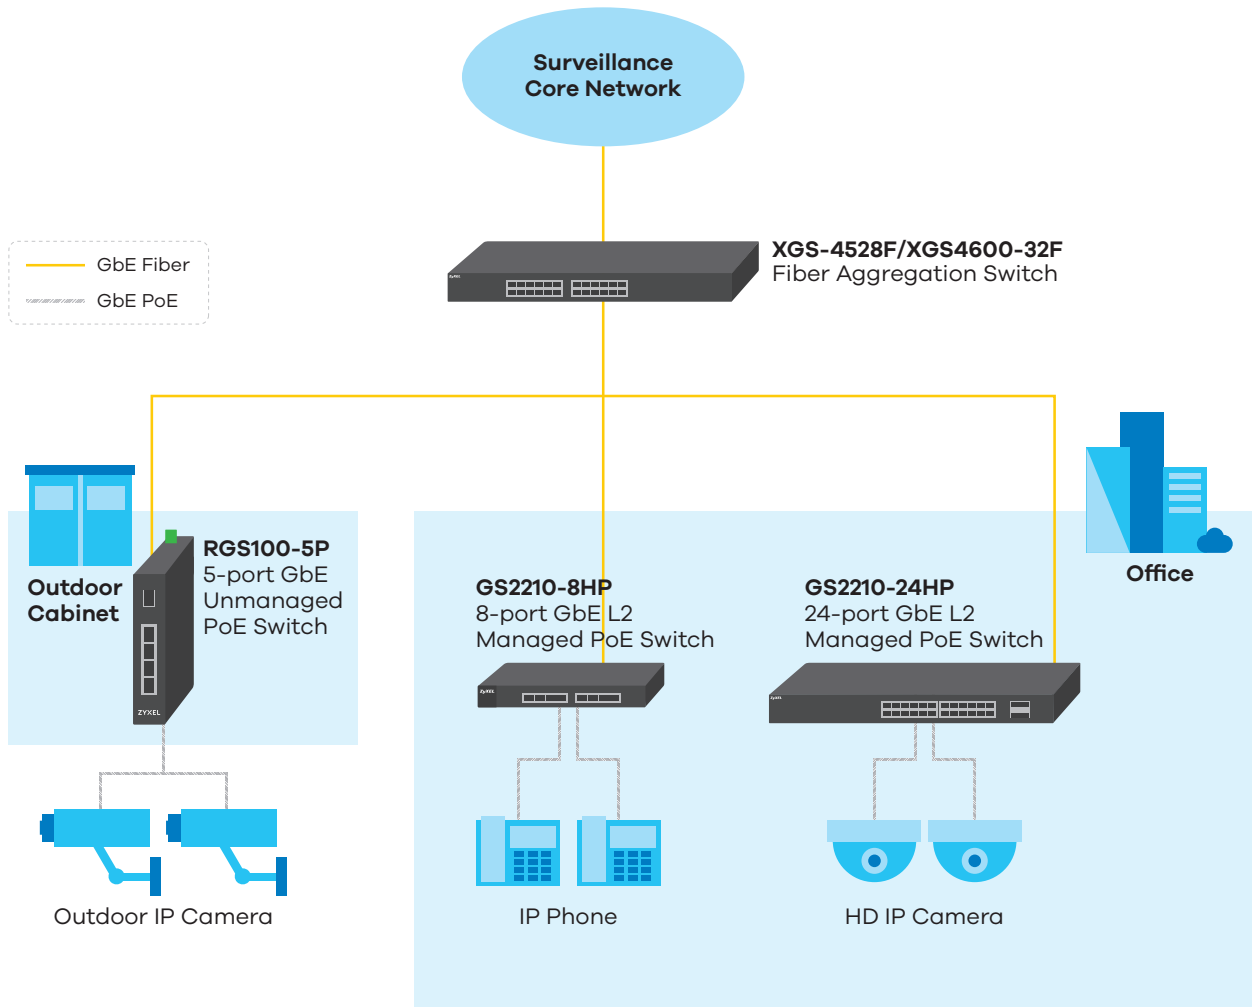

Specifications

Model	RGS100-5P	
Product name	5-port GbE Unmanaged PoE Switch	
		
Switch class	Unmanaged	
Port Density		
Total port count	5	
100/1000 Mbps PoE	4	
Gigabit SFP	1	
Performance		
Switching capacity (Gbps)	10	
Forwarding rate (Mpps)	7.44	
Packet buffer (byte)	0.25 M	
MAC address table	2 K	
Jumbo frame (byte)	9 K	
Power		
Input	Dual power input 12 V - 58 V DC	
Max. power consumption (watt)	125	
Total PoE power budget (watt)	120	
Physical Specifications		
Item	Dimensions (WxDxH)(mm/in.)	29.1 x 107.3 x 139/1.15 x 4.22 x 5.47
	Weight (kg/lb.)	0.5/1.1
Packing	Dimensions (WxDxH)(mm/in.)	70 x 177.8 x 205/2.76 x 7 x 8.07
	Weight (kg/lb.)	0.7/1.54
Included accessories	<ul style="list-style-type: none"> • Rack mounting kit • DIN mounting kit 	
Green Feature		
Fanless	Yes	
Environmental Specifications		
Operating environment	Temperature	-40°C to 75°C/-40°F to 167°F
	Humidity	5% to 95% (non-condensing)
Storage environment	Temperature	-40°C to 85°C/-40°F to 185°F
	Humidity	5% to 90% (non-condensing)
MTBF (hr)	568,430	
Heat dissipation (BTU/hr)	426.25	
Acoustic noise (dBA)	0	

Features

Standard Compliance

- IEEE 802.3 10BASE-T Ethernet
- IEEE 802.3u 100BASE-TX Ethernet
- IEEE 802.3ab 1000BASE-T Ethernet
- IEEE 802.3z 1000BASE-X
- IEEE 802.3af PoE
- IEEE 802.3at PoE Plus
- IEEE 802.1p Class of Service (CoS) prioritization
- Full-duplex and half duplex operation with IEEE 802.3x flow control and backpressure
- Store and forward
- N-way auto-negotiation

Layer 2 Features

- Jumbo frame support up to 9 K
- Automatic MDI/MDIX support
- Auto address learning
- Non-blocking architecture — Wire-speed throughput
- Support power consumption mode
- No power guard-band function
- Multicast/Broadcast/Flooding Storm Control per system basis enable/disable

Industrial Case/Installation

- Slim IP30 metal case protection
- DIN rail and wall mount design
- Dual power design
- Supports lightning surge protection:
 - Ethernet port: 2KV
 - Power input: 2KV
- Supports ESD protection (Air/Contact): 8KV/6KV
- Supports EFT protection: 2KV
- -40°C to 75°C operating temperature

Accessories

Transceivers (Optional)

Model	Speed	Connector	Wavelength	Max. Distance	DDMI
SFP-1000T	Gigabit	RJ-45	-	100 m (109 yd)	-
SFP-BX1310-10-D	Gigabit	LC	1310 nm (Tx); 1490 nm (Rx)	10 km (10936 yd)	Yes
SFP-BX1490-10-D	Gigabit	LC	1490 nm (Tx); 1310 nm (Rx)	10 km (10936 yd)	Yes
SFP-LHX1310-40-D	Gigabit	LC	1310 nm	40 km (43744 yd)	Yes
SFP-LX-10-D	Gigabit	LC	1310 nm	10 km (10936 yd)	Yes
SFP-SX-D	Gigabit	LC	850 nm	550 m (601 yd)	Yes
FP-ZX-80-D	Gigabit	LC	1550 nm	80 km (87488 yd)	Yes
SFP-100BX1310-20-D	Fast Ethernet	LC	1310 nm (Tx); 1550 nm (Rx)	20 km (21872 yd)	Yes
SFP-100BX1550-20-D	Fast Ethernet	LC	1550 nm (Tx); 1310 nm (Rx)	20 km (21872 yd)	Yes

For more product information, visit us on the web at www.zyxel.com

Copyright © 2016 Zyxel Communications Corp. All rights reserved. Zyxel, Zyxel logo are registered trademarks of Zyxel Communications Corp. All other brands, product names, or trademarks mentioned are the property of their respective owners. All specifications are subject to change without notice.

Datasheet [RGS100-5P](#)



5-100-01016014 10/16