

Performance Series IP

H2W2PC1M

Network WDR 2MP People Counting Camera



OPERATIONAL				
VIDEO STANDARD	NTSC/PAL			
SCANNING SYSTEM	Progressive			
IMAGE SENSOR	1/2.8" 2Megapixel progressive scan CMOS			
NUMBER OF PIXELS (H × V)	1920(H) x 1080(V)			
MINIMUM ILLUMINATION	0.08lux/F2.0(Color,30IRE) 0.04Lux/F2.0(B/W,30IRE)			
S/N RATIO	More than 45dB			
ELECTRONIC SHUTTER SPEED	1/3~1/100000s			
IR DISTANCE	N/A			
DAY/NIGHT	Auto(ICR) / Color / B/W			
BACKLIGHT COMPENSATION	BLC/HLC/WDR			
WHITE BALANCE	Auto/Natural/Street Lamp/Outdoor/Manual/ Customized Region			
GAIN CONTROL	0~100			
WIDE DYNAMIC RANGE	120dB			
NOISE REDUCTION	3D DNR			
PRIVACY MASKING	Off / On (4 Areas, Rectangle)			
MOTION DETECTION	Off / On (4 Zones Rectangle)			
REGION OF INTEREST	Off / On (4 Zones)			
FACE DETECTION	Supported			
AUDIO DETECTION	Supported			
PEOPLE COUNTING	Supported			
LENS	2.1mm, F2.0 Fixed, Board-in			
ANGLE OF VIEW	H: 128°, V:70°			
VIDEO				
VIDEO COMPRESSION	H.265/H.264H/Smart Codec/MJPEG (Sub Stream)			
RESOLUTION	1080P(1920x1080)/1.3M(1280x960)/ 720P(1280×720)/D1(704×480/576)/ CIF(352×240/288)			
FRAME RATE	Main Stream: 1080P (1~50/60fps) Sub Stream: D1(1~50/60fps) Third Stream: 1080P(1~25/30fps)			
BIT RATE CONTROL	CBR/VBR			
BIT RATE	H.264: 24~9472Kbps H.265: 14~5632Kbps			
NETWORK				
ETHERNET	RJ-45 (10/100Base-T)			
SUPPORTED WEB BROWSERS	Internet Explorer (11.0+)			
SUPPORTED OS	Windows® 7 32-bit/64-bit; Windows® 10 32-bit/64-bit			

NETWORK (CONT'D)				
PROTOCOLS*	HTTP; HTTPs; TCP; ARP; RTSP; RTP; RTCP; UDP; SMTP; DHCP; DNS; PPPoE; IPv4/v6; QoS; UPnP; NTP; Bonjour; IEEE 802.1x; Multicast; ICMP; IGMP; TLS			
INTEROPERABILITY	ONVIF Profile S/G/Q			
MAXIMUM USERS ACCESS	20 Users			
SECURITY	User account and password protection HTTPS, IP Filter, Digest authentication, User access log, TLS1.2 only, AES- 128/256, SSH/Telnet closed, sFTP by default, PCIDSS compliance			
EVENT	No SD card, SD card error, Capacity warning, Network disconnection, IP conflict, Illegal access			
MICRO SD	Up to 128 GB microSDHC card, Class 10 (not included)			
AUDIO				
COMPRESSION	G.711a/G.711Mu/AAC/G.726			
INTERFACE	Built-in Mic			
ELECTRICAL				
POWER SUPPLY	DC12V, PoE (802.3af)(Class 0)			
POWER CONSUMPTION	<4.5W			
MECHANICAL				
DIMENSIONS	Ø106mm×50.3mm (4.17"×1.98")			
PRODUCT WEIGHT	0.32kg(0.71lb)			
PACKAGE WEIGHT	0.46kg (1.01lb)			
CONSTRUCTION	Die-cast aluminum housing with powder coat			
CONSTRUCTION COLOR	RAL 9003 (White)			
ENVIRONMENTAL				
OPERATING TEMPERATURE	-30° C ~ +60° C (-22° F ~ +140° F)			
RELATIVE HUMIDITY	Less than 95%, non-condensing			
INGRESS PROTECTION	IP66			
IMPACT RESISTANCE	IK10			
REGULATORY				
EMISSIONS	FCC Part 15B, EN55032			
IMMUNITY	EN 50130-4			
SAFETY	UL 60950-1, EN 62368-1			
ROHS	EN 50581			

* Some development may be required in specific user cases to support some of these protocols in the field as they mature over time.

Network WDR 2MP People Counting Camera

RECOMMENDED ACCESSORIES


SYSTEM COMPATIBILITY		MOUNTS AND ACCESSORIES		** The H(
HEN*4	8/16/32/64-channel Performance Series 4K NVRs (H.264 and H.265)	HQA-PM2**		Pole Mount Adapter	camera vice ve
HEN*3	4/8/16/32-channel Performance Series 4K NVRs (H.264 and H.265)	HQA-PK**		Pendant Mount Cap	The H(used w camer
MOUNTS A	ND ACCESSORIES Outdoor Wall Mount Bracket	HQA-CBE**		Ceiling Mount Extend Bracket for HQA-CB	The H(be use togeth
HQA-BB3**	Junction Box	HQA-CB**		Ceiling Mount Bracket for Pendant Mount Cap	

ORDERING

H2W2PC1M

Network WDR 2MP People Counting Camera, 1/2.8" CMOS, 2.1mm Fixed, PoE, IP66, H.265/H.264/Smart Codec, support mobile

DIMENSIONS

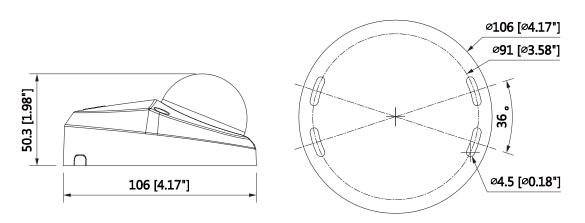

For more information

www.honeywellvideo.com

Honeywell Security

22700 Blankenbaker Pkwy, Suite 150 Louisville, KY 40299 1.800.323.4576 www.honeywell.com ONVIF and the ONVIF logo are trademarks of ONVIF Inc. Honeywell reserves the right, without notification, to make changes in product design or specifications.

HSV-H2W2PC1M-01-US(1118)DS-Y © 2018 Honeywell International Inc.

** The HQA-BB3 must be used when installing the camera to HQA-PM2, vice versa.

The HQA-PK must be used when installing the camera to HQA-CB.

The HQA-CBE must be used with HQA-CB together.

