

Dynacom WM5X25

5x5MP Megapixel 360 Degree Panoramic IP Camera



WM5X25 25 Megapixel Camera

360° Panoramic View

Sensor: 5*1/1.8" 5MP Pixel can CMOS

Pixel: 40 Megapixels / 5 x 2592x1944 (HDTV)


Lens: 2.8mm Fixed Lens

Frame: 5 x 2592x1944 @ 30fps


Applications

- for Road Traffic
- for Playground / Stadium
- for Airport
- for Crossroads
- Car Shop
- Shopping Mall

360° Panoramic Camera Application

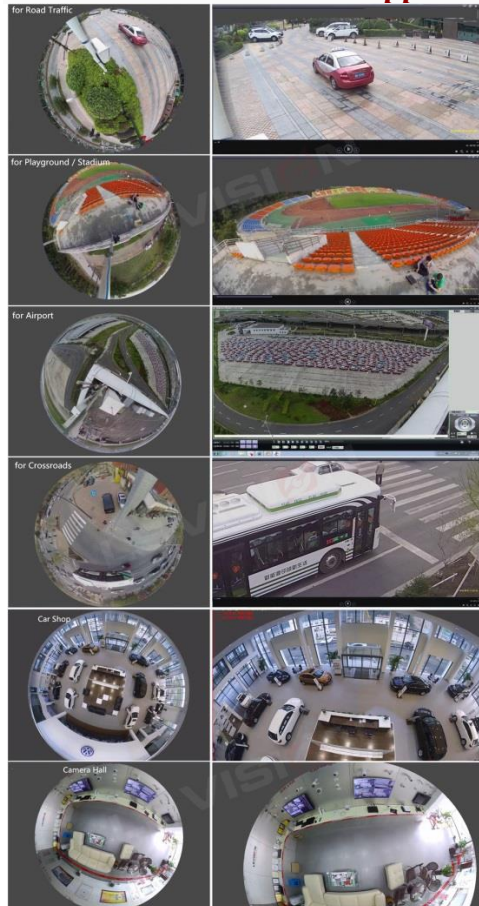

360° Panoramic Video Surveillance Image

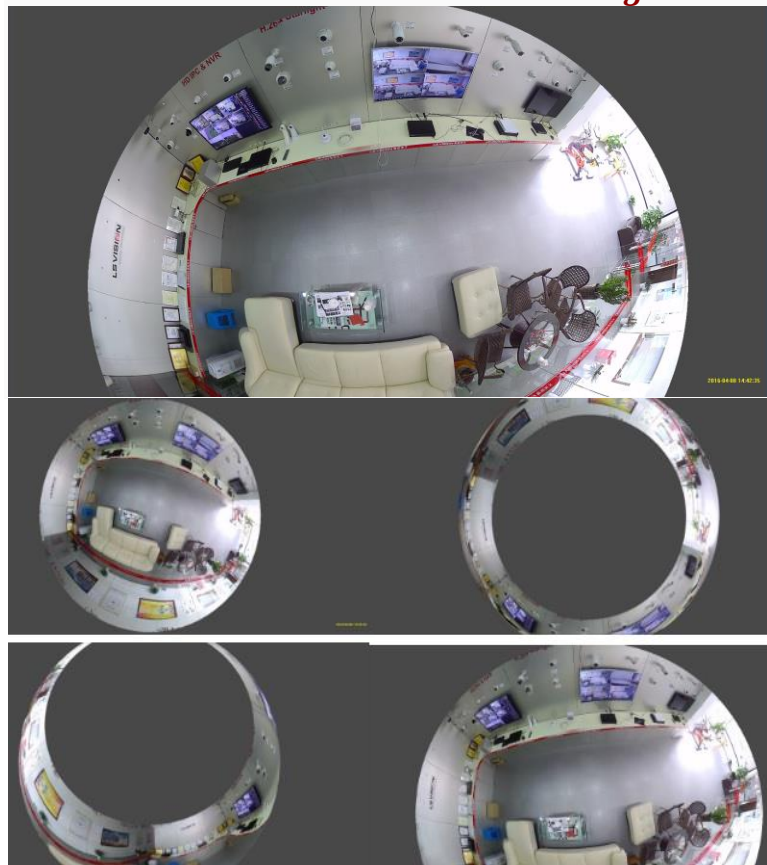

Specification	
Image Sensor	5*1/1.8" 5MP Pixel can CMOS
Shutter speed	1/5 second -1/50,000 second
Min illumination	Color : 0.2Lux @ F1.2 AGC On black-and-white : 0.003Lux @ F1.2 AGC On
Lens	2.8mm Fixed Lens
Viewing angle	360 degree
Day&Night	Yes
ICR Infrared filter	Yes
Encoding standard	
Video encoding standard	H.265/H.264/MJPEG Optional
Encoding type	H.265/H.264 Baseline/MainProfile/HighProfile Optional
Audio coding standard	G.711a/G.711u/RAW_PCM Optional
Image index	
Max image size	40 Megapixels / 5 x 2592x1944 (HDTV)
ePTZ	Support digital zoom / Pan / Tilt
Frame rate	5 x 2592x1944 @ 30fps
Image set	Brightness, contrast, saturation, sharpness adjustment
Network function	
Smart alarm	Motion detection, occlusion alarm, full of memory, the memory fault.
Support protocol	IPv4/IPv6,RTSP, RTP, RTCP, TCP, UDP,HTTP, DHCP, DNS, FTP, DDNS, PPPoE, Samba, SMTP, Onvif V2.4
General functions	A key recovery, anti flicker, double stream, heartbeat, password protection
Function interface	
Network interface	1 RJ45 10M/100M adaptable Ethernet ports
Built-in SD card	Support Max 128G Micro SD/SDHC /SDXC card local storage
Audio input / output	1- channel 3.5 mm audio input (mic input / linear input) / output interface
Alarm input / output	1 channel input / output
General specification	
Working temperature/humidity	-30°C ~ 60°C, humidity is less than 95% (no condensation heater).
Power Interface	DC12V±10%, 3A
Power	36W
Waterproof Rate	IP66
Vandal-proof Rate	IK10
Dimensions(mm)	281.8 x 228mm
Weight(kg)	5.9

