


## DS-9104/9108/9116HFI-ST(RT) Standalone DVR

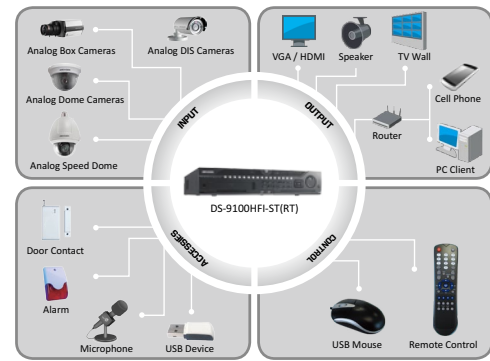

### Key features

- H.264 video compression
- 4CIF resolution real-time recording
- HDMI and VGA output at up to 1920×1080P resolution
- 4/8/16-ch synchronous playback
- HDD quota and group management
- Dual Gigabit network interfaces
- RAID 0,1,5,10 supported(DS-9104/08/16HFI-RT)

### Rear Panel of DS-9116HFI-ST(RT)



1. Video in
2. Video loop out
3. Video spot out
4. Video out
5. CVBS audio out, VGA audio out
6. Line in
7. Audio in, RCA connector
8. Audio in, DB26 connector
9. RS-232 serial interface
10. VGA interface
11. HDMI interface
12. eSATA interface
13. LAN1, LAN2 network interface
14. Termination switch
15. RS-485 serial interface, keyboard Interface, alarm in, alarm out
16. GND
17. 100 ~ 240VAC power input
18. Power switch

### Specifications

	DS-9104HFI-ST(RT)	DS-9108HFI-ST(RT)	DS-9116HFI-ST(RT)
<b>Video/Audio input</b>			
Video compression	H.264		
Video input	4-ch, BNC(1.0 Vp-p, 75 Ω), PAL / NTSC self-adaptive	8-ch, BNC(1.0 Vp-p, 75 Ω), PAL / NTSCself-adaptive	16-ch, BNC(1.0 Vp-p, 75 Ω), PAL / NTSC self-adaptive
Audio compression	OggVorbis		
Audio input	4-ch, RCA (2.0 Vp-p, 1 kΩ)	8-ch,Audio 1-4: RCA (2.0 Vp-p, 1 kΩ) Audio 5-8: DB26 connector	16-ch,Audio 1-4: RCA (2.0 Vp-p, 1 kΩ) Audio 5-16: DB26 connector
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ)		
<b>Video/Audio output</b>			
HDMI output	1-ch, resolution:1024×768 /60 Hz, 1280×720 /60 Hz, 1280×1024 /60 Hz, 1600×1200 /60 Hz, 1920×1080P / 50 Hz, 1920×1080P /60 Hz		
VGA output	1-ch, resolution:1024×768 /60 Hz, 1280×720 /60 Hz,1280×1024 /60 Hz, 1600×1200 /60 Hz, 1920×1080P /60 Hz		
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω),resolution: PAL: 704×576, NTSC: 704×480		
Video spot output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704×576, NTSC: 704×480	4-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704×576, NTSC: 704×480	4-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704×576, NTSC: 704×480
Video loop out	4-ch	8-ch	16-ch
Encoding resolution	4CIF / 2CIF / CIF / QCIF		
Frame rate	25fps(P) / 30fps(N)		
Video bit rate	32Kbps - 8192Kbps, or user defined (Max. 8192 Kbps)		
Audio output	2-ch, RCA (2.0 Vp-p, 1 kΩ)		
Audio bit rate	16kbps		
Dual-stream	Support		
Stream type	Video, Video & Audio		
Playback resolution	4CIF / 2CIF / CIF / QCIF		
Synchronous playback	4-ch	8-ch	16-ch
<b>Hard disk</b>			
SATA	Up to 8 SATA interfaces		
eSATA	1 eSATA interface		
Capacity	Up to 4TB capacity for each disk		
<b>Disk array (DS-9104/9108/9116HFI-RT series supported)</b>			
Array type	RAID0, RAID1, RAID5, RAID10		
Number of array	4		
Number of virtual disk	8		
<b>External interface</b>			
Network interface	2, RJ45 10M / 100M / 1000M self-adaptive ethernet interface		
Serial interfaces	1 RS-232 interface (for parameters confi guration, maintenance, transparent channel); 1 RS-485 interface (for PTZ control); 1 RS-485 keyboard interface (for special keyboard control)		
USB interface	3, USB2.0		
Alarm in	4	16	16
Alarm out	2	4	4
<b>General</b>			
Power supply	100 ~ 240 VAC, 6.3A, 50 ~ 60Hz		
Consumption	≤ 35W	≤ 40W	≤ 45W
Working temperature	-10°C ~ +55°C		
Working humidity	10% ~ 90%		
Chassis	19-inch rack-mounted 2U chassis		
Dimensions (W x D x H)	445 × 470 × 90 mm		
Weight	≤ 8kg (without hard disk or DVD-RW)		