

SCD-2022

Premium Resolution Small Dome Camera




Key Features

- High resolution of 700TV lines
- Min. illumination 0.15Lux@F1.2 (Color)
- Built-in fixed lens (3.8mm)
- MD, Defog, SSNRIII
- Coax : Pelco-C (Coaxitron), 12V DC

Dimensions

Unit : mm (inch)

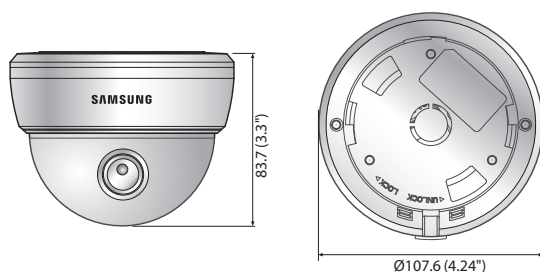

	SCD-2022N		SCD-2022P	
VIDEO				
Imaging Device	1/3" Super HAD CCD II			
Total Pixels	1,020(H) x 508(V)		1,020(H) x 596(V)	
Effective Pixels	976(H) x 494(V)		976(H) x 582(V)	
Scanning System	2 : 1 Interlace			
Synchronization	Internal			
Frequency	H : 15.734KHz / V : 50Hz		H : 15.625KHz / V : 50Hz	
Horizontal Resolution	700TV lines (ER mode)			
Min. Illumination	0.15Lux@F1.2 (50IRE), 0.0002Lux (Sens-up, 512x)			
S / N Ratio	52dB (AGC off,Weight on)			
Video Output	CVBS : 1.0Vpp / 75Ω composite			
LENS				
Focal Length (Zoom Ratio)	3.8mm (Fixed)			
Max. Aperture Ratio	F2.0			
Angular Field of View	H : 78° / V : 59°			
Min. Object Distance	0.4m (1.31ft)			
Lens Type	Fixed			
Mount Type	Board type			
PAN / TILT / ROTATE				
Pan Range	0° ~ 352°			
Tilt Range	0° ~ 75°			
Rotate Range	0° ~ 348°			
OPERATIONAL				
On Screen Display	English, Japanese, Spanish, French, Portuguese, Korean		English, French, German, Spanish, Italian, Chinese, Russian, Polish, Czech, Romanian, Serbian, Swedish, Danish, Turkish, Portugues	
Camera Title	Off / On (Displayed 15 characters)			
Day & Night	Auto (Electrical) / Color / B/W			
Backlight Compensation	Off / BLC / HLC			
Contrast Enhancement	SSDR (Off / On)			
Digital Noise Reduction	SSNRIII (Off / On)			
Defog	Off / Auto / Manual			
Motion Detection	Off / On			
Privacy Masking	Off / On (8 programmable zones)			
Sens-up (Frame Integration)	2x ~ 512x			
Gain Control	Off / Low / Middle / High			
White Balance	ATW / Outdoor / Indoor / Manual / AWC (1,700°K ~ 11.000°K)			
Electronic Shutter Speed	1/60 ~ 1/120,000sec		1/50 ~ 1/120,000sec	
Reverse	H-Rev (Off / On)			
Communication	Coaxial control (SPC-300 compatible)			
Protocol	Coax : Pelco-C (Coaxitron)			
ENVIRONMENTAL				
Operating Temperature / Humidity	-10°C ~ +55°C (+14°F ~ +131°F) / Less than 90% RH			
ELECTRICAL				
Input Voltage / Current	12V DC ±10%			
Power Consumption	Max. 1.2W			
MECHANICAL				
Color / Material	Ivory / Plastic (Dome cover : Smoked)			
Dimensions (WxH)	Ø107.6 x 83.7mm (Ø4.24" x 3.3")			
Weight	233g (0.51 lb)			

* The latest product information / sepecification can be found at <http://security.hanwhatechwin.com>

Accessories (Optional)



SBP-300WMO