

Network Video Recorder

NVR101S




Key Features

- 4/8-channel input
- Third-party IP cameras supported with ONVIF conformance
- HDMI and VGA output up to 1080P
- Up to 1080P resolution recording
- Accurate retrieval, instant playback
- 1 SATA HDD up to 6 TB
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access


Specifications

	NVR101-04S	NVR101-08S
Video /Audio Input		
IP Video Input	4-ch	8-ch
Two-way Audio Input	1-ch, RCA	
Network		
Incoming Bandwidth	25Mbps	50Mbps
Outgoing Bandwidth	16Mbps	32Mbps
Remote Connection	128	
Video/Audio Output		
HDMI/VGA Output	HDMI/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz	
Audio Output	1-ch, RCA	
Recording Resolution	1080p/960p/720p/D1/2CIF/CIF	
Synchronous Playback	4-ch	8-ch
Decoding		
Compression	H.264	
Live view/ Playback	1080p/960p/720p/D1/2CIF/CIF	
Capability	1*1080P@30, 3*960P@25, 4*720P@25, 8*D1	
Hard Disk		
SATA	1 SATA interface	
Capacity	up to 6TB for each disk	
External Interface		
Network Interface	1 RJ-45 10M/100M self-adaptive Ethernet Interface	
USB Interface	Rear panel: 2 x USB2.0	
General		
Power Supply	12V DC	
Consumption (without HDD)	≤ 4 W	
Working Temperature	-10°C ~ + 55°C (+14°F ~ +131°F)	
Working Humidity	10% ~ 90%	
Dimensions	44 × 215 × 260mm (1.7" × 8.5" × 10.2")	
Weight (without HDD)	≤ 0.79 Kg (1.74 lb)	

Dimensions

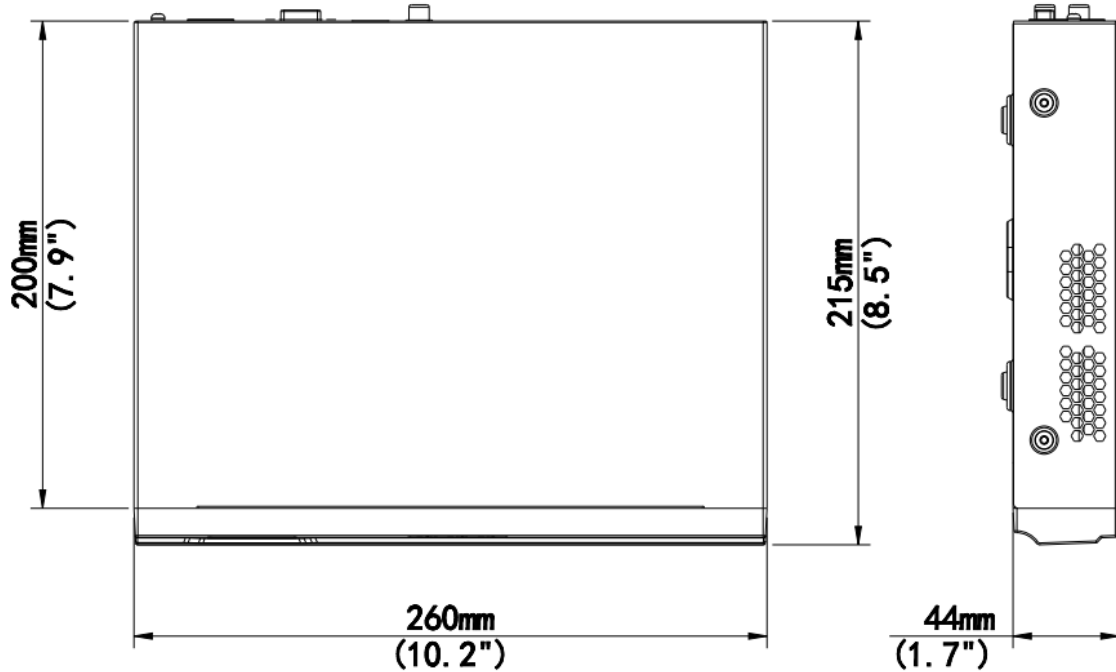

Rear Panel

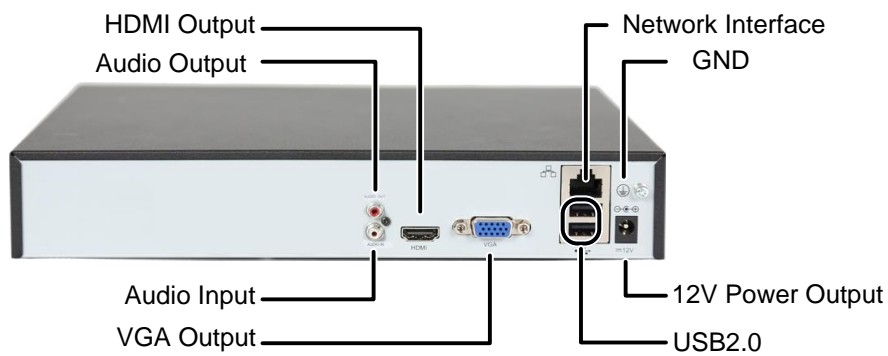

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2016 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.