

Network Video Recorder

NVR308-E-B Series




Key Features

- 16/32/64-channel input
- Third-party IP cameras supported with ONVIF conformance
- Support 2-ch HDMI, 1-ch VGA, 1-ch CVBS, HDMI2 at up to 4K(3840x2160) resolution
- Up to 12 Megapixels resolution recording
- Support H.265/H.264 video formats
- Accurate retrieval, instant playback
- Support RAID 0, 1, 5, 6, 10
- 8 SATA HDDs, Up to 8TB for each HDD
- Support various VCA detection alarm and VCA search
- Dewarping support for fisheye cameras
- Support N+1 Hot spare
- Support for 12V Power output
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access


Specifications

Model	NVR308-16E-B		NVR308-32E-B	NVR308-64E-B
Video/Audio Input				
IP Video Input	16-ch		32-ch	64-ch
Two-way Audio Input	1-ch, RCA			
Network				
Incoming Bandwidth	160Mbps		320Mbps	
Outgoing Bandwidth	320Mbps			
Remote Users	128			
Video/Audio Output				
HDMI/VGA Output	HDMI1/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI2: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz			
CVBS Output	1-ch, BNC			
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF			
Audio Output	1-ch, RCA			
Synchronous Playback	16-ch			
Decoding				
Compression	H.265/H.264			
Live view/ Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF			
Capability	3 x 12MP@25, 4 x 4K@30, 8 x 4MP@30, 16 x 1080P@30, 32 x 960P@25, 36 x 720P@30, 64 x D1			
Hard Disk				
SATA	8 SATA interfaces			
Capacity	up to 8TB for each HDDs			
eSATA	1 eSATA interface			
Disk Array				
Array Type	RAID 0, 1, 5, 6, 10			
External Interface				
Network Interface	2 RJ-45 10M/100M/1000M self-adaptive Ethernet Interfaces			
Serial Interface	1 x RS232, 1 x RS485			
USB Interface	Front panel: 2 x USB2.0,Rear panel: 1 x USB3.0			
Alarm In	16-ch			
Alarm Out	4-ch			
General				
Power Supply	100 ~ 240 VAC			
Consumption (without HDD)	≤ 20 W			
Working Temperature	-10°C ~ + 55°C (+14°F ~ +131°F)			
Working Humidity	10% ~ 90%			
Dimensions	86mm × 442mm ×425mm (3.4" × 17.4" × 16.7")			
Weight (without HDD)	≤ 5.13 Kg (11.31 lb)			

Dimensions

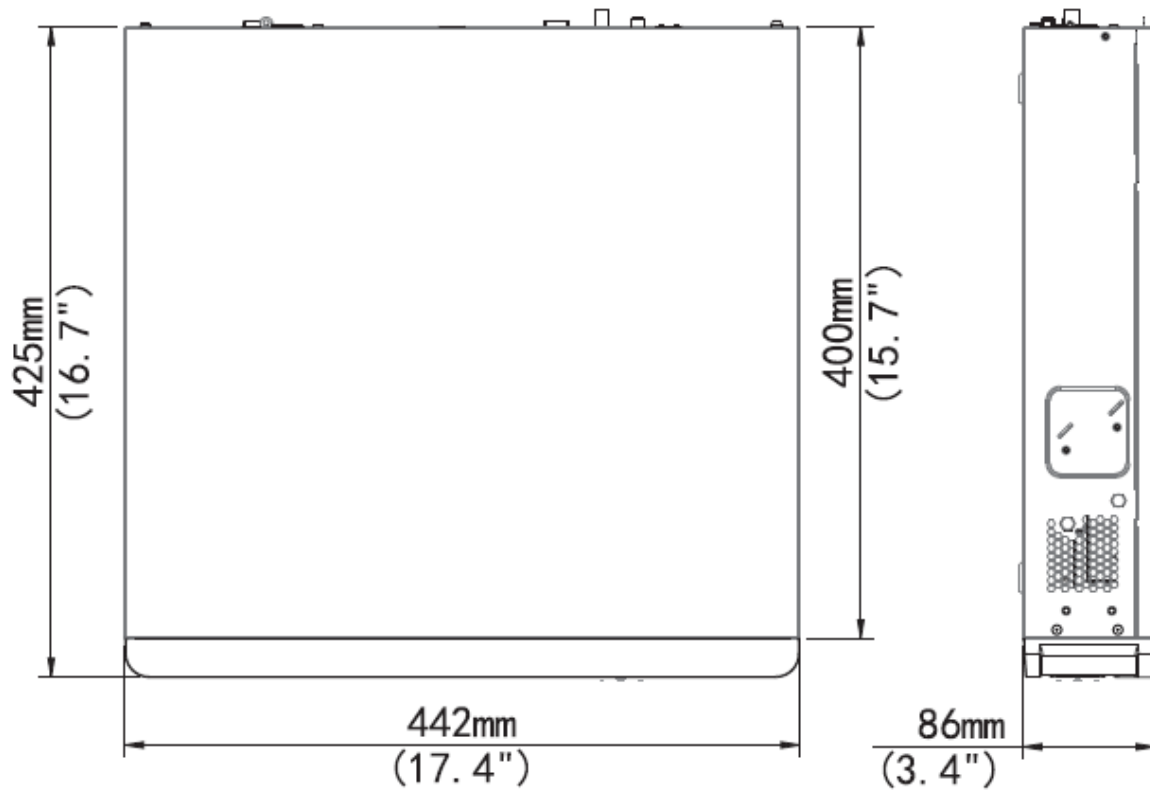

Rear Panel

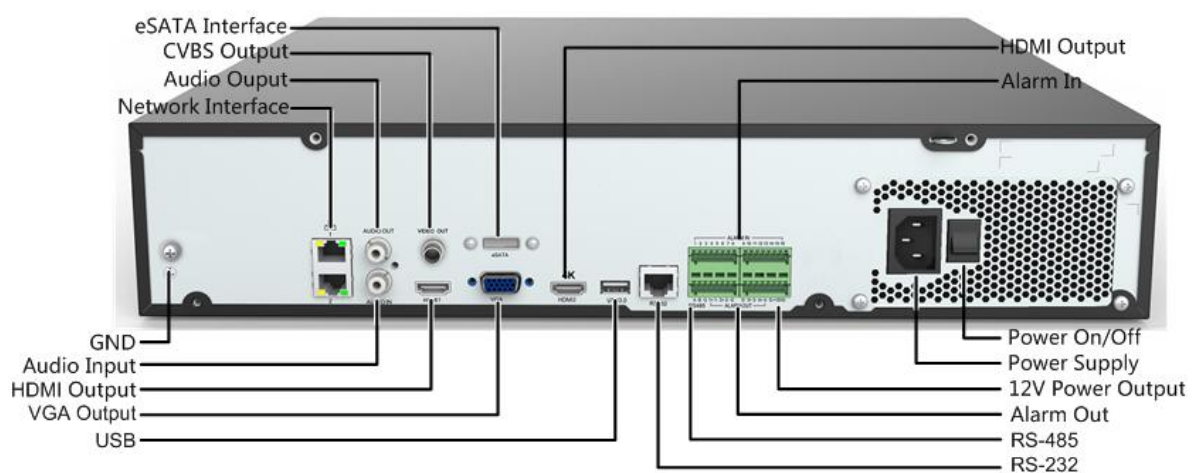

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2011-2017 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.