

# Network Video Recorder

## NVR308-R-B Series




### Key Features

- 32/64-channel input
- Third-party IP cameras supported with ONVIF conformance
- Support 2-ch HDMI, 1-ch VGA, 1-ch CVBS, HDMI2 at up to 4K(3840x2160) resolution
- Up to 12 Megapixels resolution recording
- Support H.265/H.264 video formats
- Accurate retrieval, instant playback
- Support HDD hot swap with RAID 0, 1, 5, 6, 10 storage scheme configurable
- 8 SATA HDDs, Up to 8TB for each HDD
- Support various VCA detection alarm and VCA search
- Dewarping support for fisheye cameras
- Support N+1 Hot spare
- Support for 12V Power output
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access


## Specifications

Model	NVR308-32R-B	NVR308-64R-B
<b>Video/Audio Input</b>		
IP Video Input	32-ch	64-ch
Two-way Audio Input	1-ch, RCA	
<b>Network</b>		
Incoming Bandwidth	320Mbps	
Outgoing Bandwidth	320Mbps	
Remote Users	128	
<b>Video/Audio Output</b>		
HDMI/VGA Output	HDMI1/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI2: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz	
CVBS Output	1-ch, BNC	
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Audio Output	1-ch, RCA	
Synchronous Playback	16-ch	
<b>Decoding</b>		
Compression	H.265/H.264	
Live view/ Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Capability	3 x 12MP@25, 4 x 4K@30, 8 x 4MP@30, 16 x 1080P@30, 32 x 960P@25, 36 x 720P@30, 64 x D1	
<b>Hard Disk</b>		
SATA	8 SATA interfaces	
Capacity	Up to 8TB for each HDD	
eSATA	1 eSATA interface	
<b>Disk Array</b>		
Array Type	RAID 0, 1, 5, 6, 10	
<b>External Interface</b>		
Network Interface	2 RJ-45 10M/100M/1000M self-adaptive Ethernet Interfaces	
Serial Interface	1 x RS232, 1 x RS485	
USB Interface	Rear panel: 2 x USB2.0, 1 x USB3.0	
Alarm In	16-ch	
Alarm Out	4-ch	
<b>General</b>		
Power Supply	100 ~ 240 VAC	
Consumption ( without HDD )	≤ 20 W	
Working Temperature	-10°C ~ + 55°C ( +14°F ~ +131°F )	
Working Humidity	10% ~ 90%	
Dimensions	86mm × 442mm × 531mm ( 3.4" × 17.4" × 19.9" )	
Weight ( without HDD )	≤ 5.13 Kg (11.31 lb )	

## Dimensions

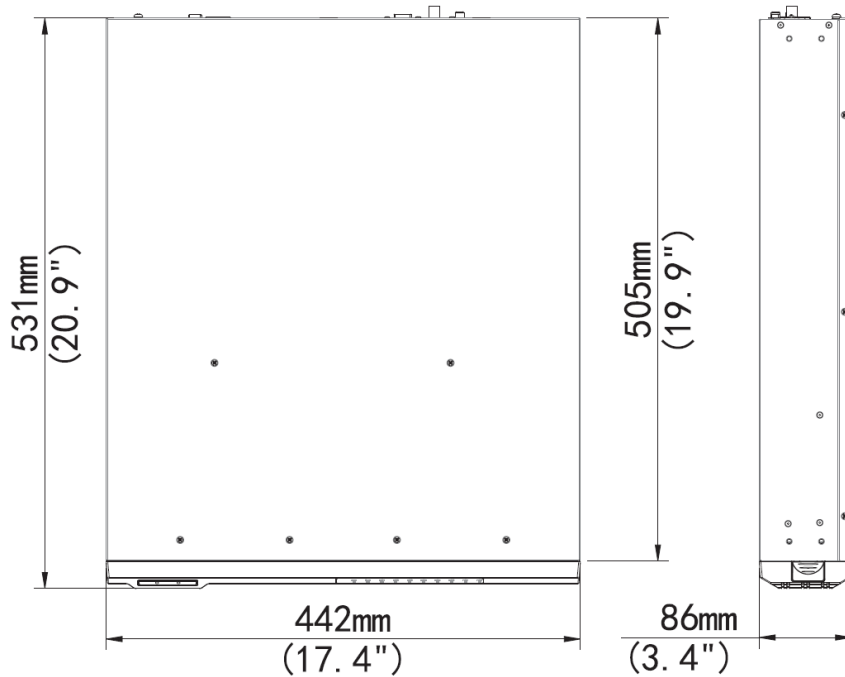

## Rear Panel

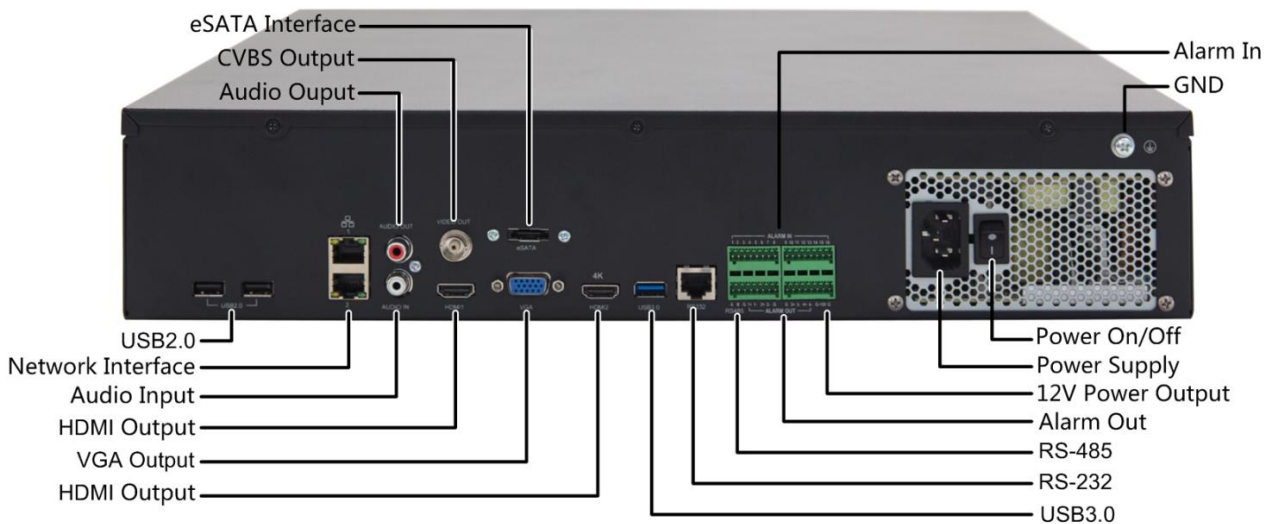

**Zhejiang Uniview Technologies Co., Ltd.**

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2011-2017 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.