

DC4304 DC4308

Key Features


- H.264 video compression
- ONVIF conformance stream decoding
- Video decoding resolution: QCIF/CIF/2CIF/ 4CIF/D1/960H/720P/960P/1080P
- DVI-I output up to 1080P, compatible with HDMI/DVI-D/VGA/YPbPr/RGBHV port
- HDMI and VGA Video input
- 1/4/9/16 display split
- Video Wall with 1×2, 2×1, 2×2, 2×3, 3×2, 2×4 and 4×2

Specifications


	DC4304	DC4308
Video		
Video Output	4-ch, DVI-I	8-ch, DVI-I
Video Input	1-ch,HDMI and 1-ch,VGA	
Video Output Resolution	1024*768/60HZ, 1280*720/60HZ, 1280*1024/60HZ, 1360*768/60HZ, 1600*1200/60HZ, 1920*1080P/60HZ, and 1920*1080P/50HZ	
Video Input Resolution	1024*768/60HZ, 1280*720/60HZ, 1280*1024/60HZ, 1920*1080P/60HZ, 1920*1080P/50HZ	
Video Compression	H.264	
Video Decoding Resolution	1080P, 1080I,960P,720P,960H,D1, 4CIF, 2CIF, CIF, QCIF	
Display Split	1/4/9/16	
Video Wall	1×2, 2×1, 2×2	1×2, 2×1, 2×2, 2×3, 3×2, 2×4, 4×2
Audio		
Input	1-ch	
Output	8-ch	
Audio Compression	G.711μ, G.711a, AAC	
Sound Track	Mono	
Mute	You can choose mute	
External Interface		
Network Interface	2 RJ45 10M/100M/1000M adaptive Ethernet Interface	
Serial Interface	1 RS-232, 1 RS-485	
Alarm I/O	8/6	
General		
Power Supply	100~240 VAC	
Consumption	50 W	70 W
Working Environment	-10°C to 55°C (10 °F to 131 °F) 10% to 90% RH	

Weight	4 kg (8.82 lb)
Dimensions (H×W×D)	43.6mm × 440.0mm × 320.0mm (1.72" × 17.32" × 12.60")

Dimensions

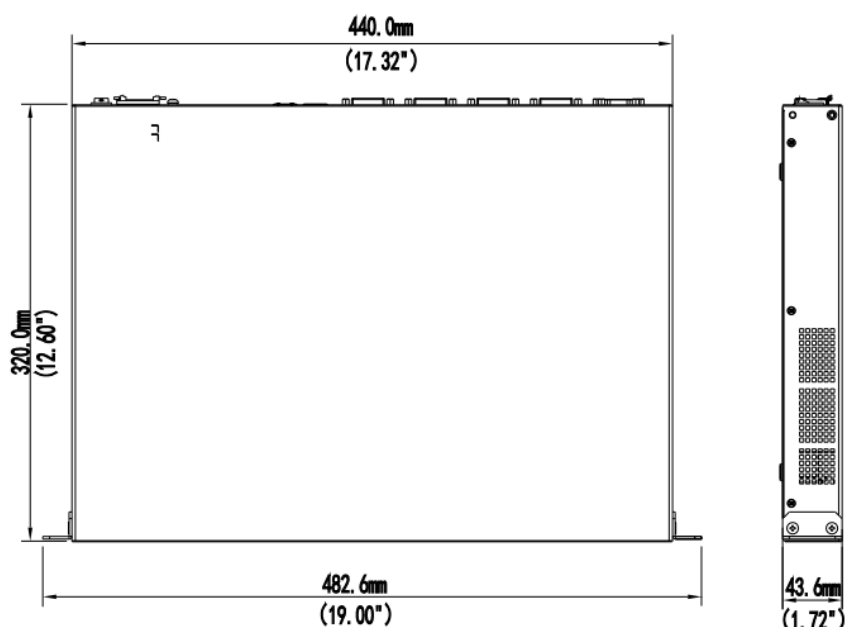

Rear Panel

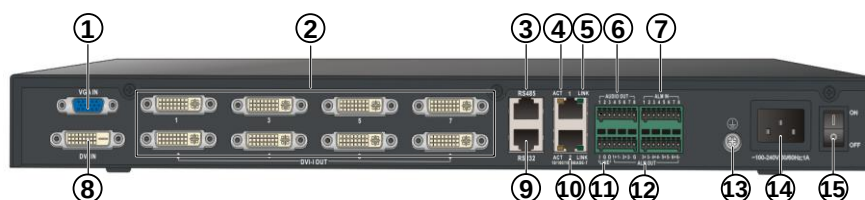

DC4308-IN

(1) VGA IN port	(2) DVI-I OUT port	(3) RS-485 port
(4) ACT LED	(5) LINK LED	(6) AUDIO OUT port
(7) Alarm IN port	(8) DVI-D IN port	(9) RS-232 port
(10) Ethernet port	(11) LINE port	(12) Alarm OUT port
(13) GND	(14) AC power input	(15) Power switch

*Take DC4308-IN as an example

Zhejiang Uniview Technologies Co., Ltd.

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2014 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.