

Single Channel High Definition Video Decoder

DC5301-NI



Key Features

The output of 1-ch HDMI, 1-ch VGA, 1-ch CVBS, HDMI at up to 4K(3840x2160) resolution

Decode video stream at resolution of 12MP, 8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 960P, 720P, D1, and CIF

Decode video stream in H.265/ H.264/ MPEG4/ MPEG2/ MJPG

Decode audio in G.711A/ G.711 μ format


Standard ONVIF video stream supported

1/2/3/4/7/9/16 display split


Specifications

DC5301-NI	
Video	
HDMI Output	1-ch, 3840x2160@60, 3840x2160@30, 1920 x 1080p@60, 1920 x 1080p@50, 1600 x 1200@60, 1440 x 900@60, 1366 x 768@60, 1280 x 1024@60, 1280 x 720@60, 1024 x 720@50, 1024x768@60
VGA Output	1-ch, 1920 x 1080p@60, 1920 x 1080p@50, 1600 x 1200@60, 1440 x 900@60, 1366 x 768@60, 1280 x 1024@60, 1280 x 720@60, 1024 x 720@50, 1024x768@60
CVBS Output	PAL
Video Decoding Resolution	12MP, 8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 1080I, 960P, 720P, D1, and CIF
Decoding Capability	2x1200W@30, 4x8MP@30, 8x1080P@60, 16x1080P@30
Display split	1/2/3/4/7/9/16
Audio	
Input	1-ch
Output	1-ch
Audio Compression	G.711μ , G.711A
Sound track	Mono
Mute	Support
External Interface	
Network Interface	2 RJ-45 10M/100M/1000M adaptive Ethernet Interfaces
USB Interface	1 USB2.0 Interface
Serial Interface	1 x RS-232, 1 x RS-485/422
Alarm Input	4-ch
Alarm Output	2-ch
General	
Power Supply	12V DC
Consumption	15 W
Working Temperature	-10°C ~ + 60°C (+14°F ~ +140°F)
Working Humidity	10% ~ 90%
Weight	≤2.0 Kg (4.4 lb)
Dimensions (H x D x W)	40 × 250 × 189mm (1.6" × 9.8" × 7.4")

Dimensions

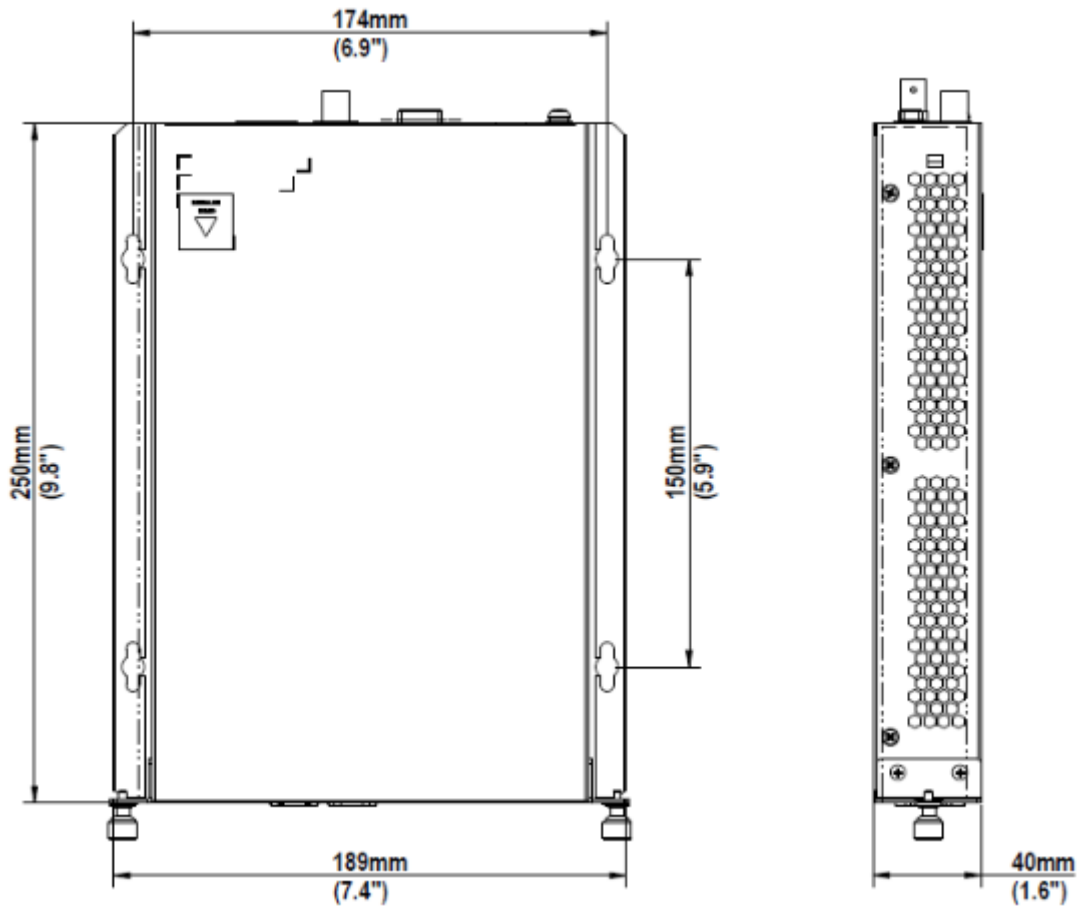

Rear Panel

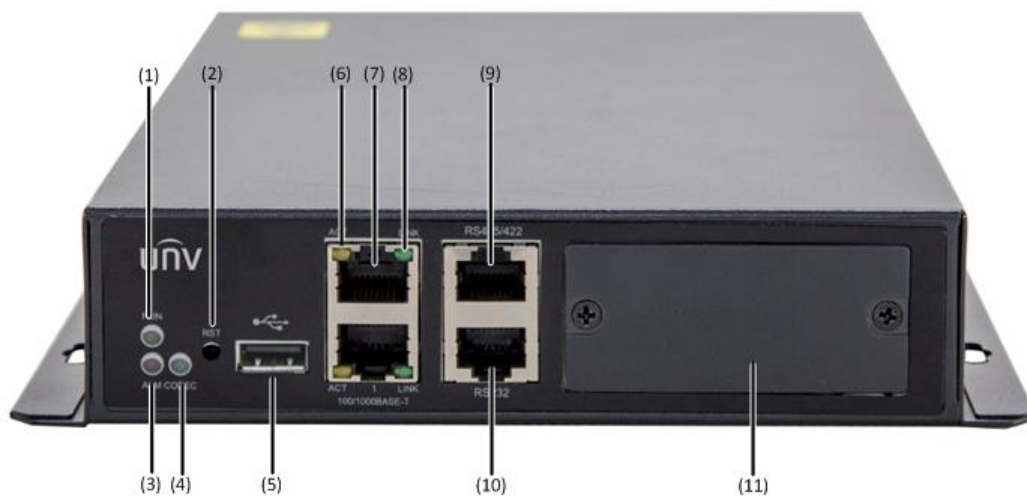

Front view

(1) Running LED

(2) Reset button

(3) Alarm LED

(4) Decoding LED	(5) USB port	(6) Active LED
(7) Ethernet port	(8) Link LED	(9) RS-485/422 port
(10) RS-232 port	(11) Subcard slot	



Rear view

(1) GND	(2) VGA OUT port	(3) HDMI OUT port
(4) CVBS OUT port	(5) LINE IN port	(6) ALARM IN port
(7) ALARM OUT port	(8) AUDIO port	(9) Power IN port

Zhejiang Uniview Technologies Co.,Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2011-2016 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.