

Dynacolor ZF Series

Hyper Mini Rugged Dome IP Camera




The Hyper Mini Rugged Dome IP Camera is an easy setup camera with PoE supported to reduce complicated cabling without sacrificing performance. Quad Streams Compression (H.264 Baseline / Main / High Profile + MJPEG) are supported for efficient bandwidth and storage management. Up to 4K2K real-time resolution is offered for providing high definition images. For dark environments, the camera has HDR, 3DNR and Day/Night ICR technologies to capture clear images.

The compact outlook design of ZF Series is ideal for hard surface mount installation, and with conduit for cabling in outdoor environment. Meanwhile, the modularized design of ZF Series makes the installation even more easier by snapping on the camera module after housing installation directly. Mounting accessories like in-ceiling mount, wall mount bracket, pendant mount kit are all available for ZF Series.

Key Features

- Sony Progressive Scan CMOS Sensor 3M / 4M Resolution*
- Quad codec support (H.264 Baseline / Main Profile / High Profile / MJPEG)
- Quad Streams Support
- Tampering Alarm
- Motion Detection
- Text Overlay and Privacy Masks
- 3D Motion Compensated Noise Reduction (MCTF)
- Network Failure Detection
- True Day/Night Function (ICR)
- IR LED Module support (working distance up to 40m) *
- BNC Analog Output
- Weatherproof (IP66 International)
- Vandal Proof (IK10 Rating)
- 64GB SDXC SD Card support
- RS-485 Support
- ONVIF Profile S Support

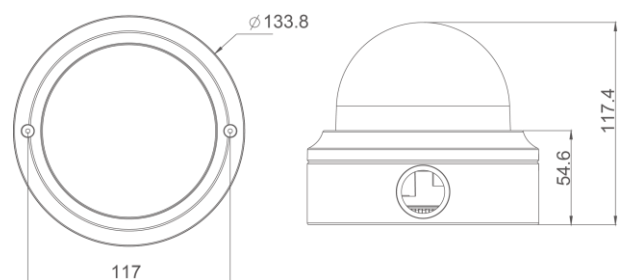

Dynacolor ZF Series - Hyper Mini Rugged IP Camera

Camera		Z4SA-F	Z4SF-F
Image Sensor		1/1.8" Sony Progressive CMOS	1/1.7" Sony Progressive CMOS
Effective Pixels		3M (3072x2048)	4M (3840x2160)
Minimum Illumination	Color	0.04 lux	0.05 lux
	B/W	0.002 lux	0.005 lux
Shutter Speed		1 ~ 1/10000 sec.	
Lens		Motorized / Vari-focal	
Focal Length		3 - 8mm	3 - 8 mm
F Number		F1.45	F1.45
FOV		TBD	116° (Wide); 52° (Tele)
Operation		English / French / German / Italian / Japanese / Korean / Portuguese / Russian / Simplified Chinese / Spanish / Traditional Chinese	
Image Setting	Iris Control	P-iris / DC Iris	
	Backlight Compensation	On/Off	
	White Balance	Auto / Manual / ATW / One Push	
	Noise Reduction	3DNR / 2DNR / Color NR	
	Wide Dynamic Range	Gamma WDR On / Off	
	Privacy Mask	On/Off	
	Brightness	Manual	
	Exposure	Auto / Manual	
	Sharpness	Manual	
	Contrast	Manual	
	Saturation	Manual	
	Hue	Manual	
	Digital Zoom	Support	
	Privacy Mask Type	Color	
Event Setting	ICR	Auto / Night / Day / Smart	
	ICR + IR LED*	Auto / Night / Day / LED On / LED Off / Smart IR / Light Sensor	
	IR Threshold	Adjustable Levels	
	Motion Detection	By Schedule / On / Off	
	Tampering Alarm	By Schedule / On / Off	
	Network Failure Detection	By Schedule / On / Off	
Audio	Audio Detection	On / Off	
	Two-way Audio	Line in / Line Out	
	Compression	G.711 / G.726 / AAC / LPCM	
Network		RJ-45, 1Gbps Ethernet	
Interface		MJPEG / H.264 (MPEG-4 Part 10/AVC) Baseline / Main Profile / High Profile	
Video Compression	Single Stream	H.264 6M (3072x2048) @25/30 fps	H.264 4K2K (3840x2160) @25/30fps
	Dual Streams	H.264 6M (3072x2048) @25/30 fps + 720P @25/30fps H.264 1080P @50/60 fps + H.264 1080P @25/30 fps Note: 1 of the streamings can be MJPEG	H.264 4K2K (3840x2160) @20 fps + H.264 1080P @20 fps H.264 1080P @50/60 fps + H.264 1080P @25/30 fps Note: 1 of the 2M or under streamings can be MJPEG
	Quad Streams	H.264 1080P @50/60 fps + H.264 SXGA @25/30 fps + H.264 720P @25/30 fps + H.264 D1 @25/30 fps Note: 1 of the streamings can be MJPEG	
Video Resolution	H.264	6M (3072 x 2048) / Full HD 1080P / SXGA / HD 720P / XGA / SVGA / D1 / VGA / CIF / QVGA	4K2K (3840 x 2160) / Full HD 1080P / SXGA / 720P / XGA / SVGA / D1 / VGA / CIF / QVGA
	MJPEG	Full HD 1080P / SXGA / 720P / XGA / SVGA / D1 / VGA / CIF / QVGA	
Protocol		IPv4/v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP, FTP, SMTP, DHCP, PPPoE, UPnP, IGMP, SNMP, QoS, ONVIF	
Security		HTTPS / IP Filter / IEEE 802.1X	
Alarm	Input	1 Set 5V 10kΩ pull up	
	Output	1 Set Photo Relay Output 300V DC/AC	
RS-485		Pelco D / Pelco P / Universal	
Event Notification		HTTP / FTP / SMTP	
SD		SDXC 64GB support	
Supported Web Browser		Internet Explorer (6.0+) / Chrome / Firefox / Safari	
User Account		20	
Password Levels		User and Administrator	
Mechanical			
Built-in IR Illuminator*	Working Distance	up to 40 m	
	Wavelength	850 nm	
LED Indicator	Number of LEDs	6	
		Power / Link / ACT	
Connectors	Alarm	4 of 9 Pin Terminal Block	
	Power	2 Pin Terminal Block (Female)	
	Ethernet	RJ-45	
	Analog Video	2 pin connector	
	Audio*	5 of 9 Pin Terminal Block	
RS-485		3 Pin Terminal Block	
General			
Operating Temperature		w/o Heater: -20°C ~ 50°C (-4° ~ 122°F) w/Heater: -50°C ~ 50°C (-58° ~ 122° F)	
Start-up Temperature		w/o Heater: -10°C ~ 50°C (14° ~ 122°F) w/Heater: -50°C ~ 50°C (-58° ~ 122° F)	
Humidity		10% ~ 90%, No Condensation	
Weatherproof Standard*		IP66	
Dimension		Ø 133.8 x 117.4 mm (Ø 5.2 x 4.6 in.)	
Weight		765 g (1.69 lb)	
Power Source		DC 10V-48V / AC 24V / PoE (802.3af) 5.6W	
Power Consumption	Operation (802.3af)	System Zoom/Motorized Lens: + 0.55W / IR LED: +3.2W / ICR Switching: +0.5W /Heater: +3W	
	Cold Start (802.3af)	Heater 11.5W	
Regulatory		CE / FCC	

* mark for optional items

Product specification and availability are subject to change without notice.



DYNACOLOR, INC.

No. 116, Jou Tz Street, Neihu, Taipei 114, Taiwan

TEL: (886)2-2659-8898

FAX: (886)2-2659-8868 <http://www.dynacolor.com.tw>

info@dynacolor.com.tw