

N-Series Superior Night Vision 2 Megapixel Mini Dome Network Camera

MD-200Np

HDTV 1080p/720p • WDR Enhancement®



- N-Series Sony Exmor 2M Outdoor Mini Dome Camera
- Brickcom WDR Enhancement® Technology inside
- HDTV Quality (Full HD 1080p @ 30fps Streaming)
- Wide Camera Angle Adjustment with Pan 35°, Tilt 0-90°, Rotation 180°
- **Intelligent Multi-Profile Sensor Management®** for Different Environments
- Weather-proof (IP67) and Vandal-proof (IK10) with Stylish Design
- Wide Angle of View and Easy to Adjust Focus
- EN50155 Certify with Anti Vibration and Shock
- Built-In Micro SD slot/ TV out Connector Supported
- PoE(802.3af) / M12 Connector / DC12V Supported





ONVIF

Photo Indication & Dimension Diagram



- ① Microphone Hole
 - ② Security Screws
 - ③ Screw Hole
 - ④ PAL/ NTSC Switch
 - ⑤ TV out Connector
 - ⑥ LED Indicators
 - ⑦ Reset Button Slot
 - ⑧ Micro SD/SDHC Card
 - ⑨ RJ45 Connector (for Ethernet and PoE:802.3.af)
 - ⑩ M12 Connector(*)
 - ⑪ DC12V Connector
- *Cable Connector Variants***

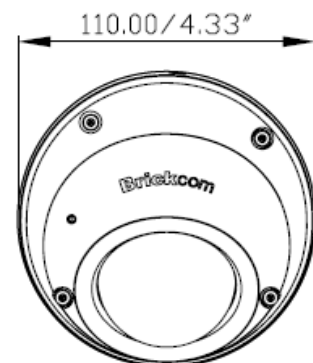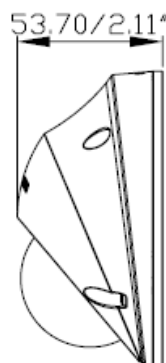

Camera

Hardware System	CPU: 533 MHz Flash: 32M RAM: 256M DDR
Image Sensor	Sensor Type : 1/2.8" Sony Exmor sensor Sensor Resolution : 1920 x 1080 pixel
Camera Angle Adjustment	Pan ± 35° / Tilt 0-90° / Rotation ± 180°
Minimum Illumination	0.01 Lux(B/W) 0.3 Lux (Color)
Local Storage	Built-in Micro SD/SDHC Memory Card Slot


Video

Compression Streaming	H.264 / MPEG4 / MJPEG Simultaneous multiple streams
Video Setting	Multi-Profile Image Management: Day/ Night/ Sunset/ User 1/ User 2 Auto Exposure Control/ Gain/ White Balance Control Manual Exposure Control: 1/10000~1/5s Manual Gain Control: 1X ~ 15X
S/N Ratio	Above 50dB
Image Resolution	2M (Full HD): 1920x1080 @ 30fps 1M (HDTV): 1280x720 @ 30fps

Events and Alarm Management

Events	Motion Detection Schedule Audio Detection
Alarm	Stream/Snapshot to FTP/Email/Samba/SD-Card HTTP/Email Notification

Product Distinction

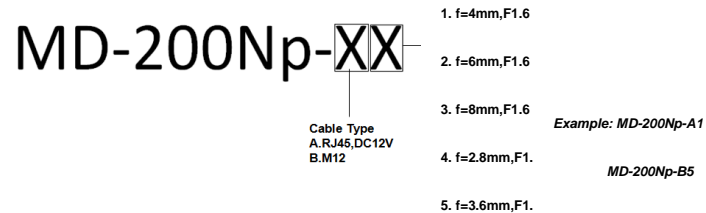

Audio

Audio Streaming	1-way Audio Support
Audio Compression	G.711, AMR (8 kHz, Mono, PCM)

Audio Input/ Output	Built-in MIC
----------------------------	--------------

General

Communication	Ethernet : one 10/100Mbps RJ-45 Supported Protocols : TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, Samba, PPPoE, UPnP, RTP, RTSP, RTCP, IPv6
----------------------	--

Connectors	Cables with different Options A. RJ45,DC12V B. M12
-------------------	--

Power Input	PoE 802.3af/ M12/ DC12V
--------------------	-------------------------

Max. Power Consumption	5.5 watts
-------------------------------	-----------

Environment	Operating Temperature -20°C ~ 50°C (-4°F ~122°F), Operating Humidity : 10% ~ 80%
--------------------	---

Dimension	110(L) X110(W) X 53.7(H) mm
------------------	-----------------------------

Weight	460g/1.02lb
---------------	-------------

Housing	Weather-proof (IP67) Vandal-proof (IK10)
----------------	---

Certification	FCC, CE, EN50155, IK10
----------------------	------------------------

Viewing System Requirements	OS: Microsoft Windows 7/Vista/XP/2000 Browser: Mozilla Firefox, Internet Explorer 6/7 or above, Safari, Google Chrome Cell Phone: 3GPP player Real Player: 10.5 or above Quick Time: 6.6 or above VLC
------------------------------------	--

Warranty	Limited 2-year warranty
-----------------	-------------------------

Lens Spec

MD-200Np	4mm	6mm	8mm	2.8mm	3.6mm
Lens Type	Board Lens	Board Lens	Board Lens	Board Lens	Board Lens
F Value	F1.6	F1.6	F1.6	F1.6	F1.6
FOV(H/V/D)	72°/40°/84°	46°/26°/54°	35°/20°/40°	96°/54°/108°	76°/43°/88°

Work Best With

Camera Accessories Options



M12 mount Lens



BNCMD-01
TV out Connector Line

Network Equipment Options



PS-588I
8-port 10/100M PoE Fast Ethernet Switch



PS-7242IL-AF
24-port 10/100M PoE Web Smart Ethernet Switch