

2 Megapixel Mini Dome Network Camera

MD-200Ap

HDTV 1080p/720p • 2M/1.3M Resolution Supported





- Most Intelligent and Professional 2M Outdoor Mini Dome Camera
- HDTV Quality (Full HD 1080p @ 30fps Streaming)
- Wide Camera Angle Adjustment with Pan 35°, Tilt 0-90°, Rotation 180°
- **Intelligent Multi-Profile Sensor Management**® for Different Environments
- Weather-proof (IP67) and Vandal-proof (IK10) with Stylish Design
- Wide Angle of View and Easy to Adjust Focus
- EN50155 Certify with Anti Vibration and Shock
- Built-In Micro SD slot/ TV out Connector Supported
- PoE(802.3af) / M12 Connector / DC12V Supported



Photo Indication & Dimension Diagram



- 1 Microphone Hole
 - 2 Security Screws
 - 3 Screw Hole
 - 4 PAL/ NTSC Switch
 - 5 TV out Connector
 - 6 LED Indicators
 - 7 Reset Button Slot
 - 8 Micro SD/SDHC Card
 - 9 RJ45 Connector (for Ethernet and PoE:802.3.af)
 - 10 M12 Connector(*)
 - 11 DC12V Connector
- *Cable Connector Variants***

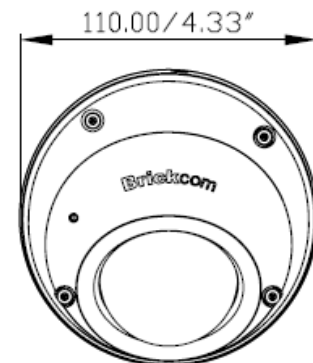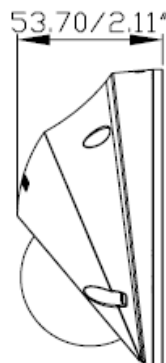

Camera

Hardware System	CPU: 533 MHz Flash: 32M RAM: 256M DDR
Image Sensor	Sensor Type : 1/2.5" CMOS Sensor Sensor Resolution : 1920x1080 pixel
Camera Angle Adjustment	Pan ± 35° / Tilt 0-90° / Rotation ± 180°
Minimum Illumination	0.6 Lux(B/W) 0.8 Lux (Color)
Local Storage	Built-in Micro SD/SDHC Memory Card Slot


Video

Compression Streaming	H.264 / MPEG4 / MJPEG Simultaneous multiple streams
Video Setting	Multi-Profile Image Management: Day/ Night/ Sunset/ User 1/ User 2 Auto Exposure/ Gain/ White Balance Control Manual Exposure Control: 1/20000~1/5s Manual Gain Control: 1X ~ 32X Manual White Balance Control:2000K~7000K
S/N Ratio	38.1dB
Image Resolution	2M (Full HD): 1920x1080 @ 30fps 1M (HDTV): 1280x720 @ 30fps

Events and Alarm Management

Events	Motion Detection Schedule Audio Detection
Alarm	Stream/Snapshot to FTP/Email/Samba/SD-Card HTTP/Email Notification

Product Distinction

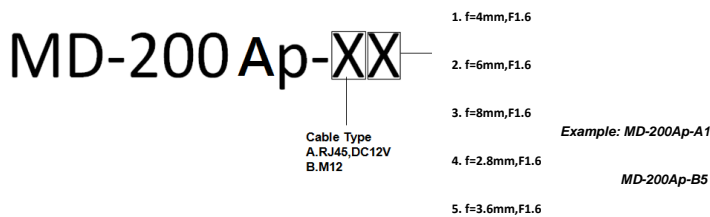

Lens Spec	MD-200Ap	f=4mm	f=6mm	f=8mm	f=2.8mm	f=3.6mm
Lens Type		Board Lens	Board Lens	Board Lens	Board Lens	Board Lens
F Number		F=1.6	F=1.6	F=1.6	F=1.6	F=1.6
FOV(H/V/D)		62°/34°/71°	38°/22°/42°	30°/16°/34°	86°/48°/98°	67°/37°/77°

Audio

Audio Streaming	1-way Audio Support
Audio Compression	G.711, AMR (8 kHz, Mono, PCM)

Audio Input/ Output	Built-in MIC
----------------------------	--------------

General

Communication	Ethernet : one 10/100Mbps RJ-45 Supported Protocols : TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, Samba, PPPoE, UPnP, RTP, RTSP, RTCP, IPv6
----------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------

Connectors	Cables with different Options A. RJ45,DC12V B. M12
-------------------	----------------------------------------------------------

Power Input	PoE 802.3af/ M12/ DC12V
--------------------	-------------------------

Max. Power Consumption	5.5 watts
-------------------------------	-----------

Environment	Operating Temperature -20°C ~ 50°C (-4°F ~122°F), Operating Humidity : 10% ~ 80%
--------------------	-------------------------------------------------------------------------------------------

Dimension	110(L) X110(W) X 53.7(H) mm
------------------	-----------------------------

Weight	460g/1.02lb
---------------	-------------

Housing	Weather-proof (IP67) Vandal-proof (IK10)
----------------	---------------------------------------------

Certification	FCC, CE, EN50155, IK10
----------------------	------------------------

Viewing System Requirements	OS: Microsoft Windows 7/Vista/XP/2000 Browser: Mozilla Firefox, Internet Explorer 6/7 or above, Safari, Google Chrome Cell Phone: 3GPP player Real Player: 10.5 or above Quick Time: 6.6 or above VLC
------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Warranty	Limited 2-year warranty
-----------------	-------------------------

Work Best With

Camera Accessories Options



M12 mount Lens



BNCMD-01
TV out Connector Line

Network Equipment Options



PS-588I
8-port 10/100M PoE Fast Ethernet Switch



PS-7242IL-AF
24-port 10/100M PoE Web Smart Ethernet Switch