


ENR-2000

16-Channel Desktop Standalone NVR




- 4-bay Desktop
- Manage up to 16 cameras or video encoders
- Recording up to 16 Channels
- Live view local up to 16 Channels, remote up to 16 Channels
- Synchronized playback local up to 16 Channels
- Export video with RAW and AVI formats
- Event trigger, response and notification
- Mobile Client, Web Client
- 16-channel free license included

PHOTO INDICATION

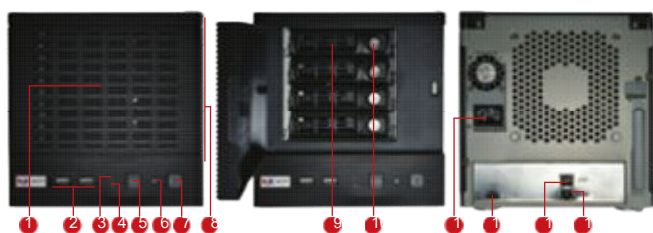

- | | |
|---------------------------------|-------------------|
| 1 Storage Disk Bays | 8 Disk Bays Cover |
| 2 USB 2.0 Ports | 9 Hinge Tab |
| 3 System/Restoration Status LED | 10 Lock Tab |
| 4 HDD Read/Write Status LED | 11 Power Source |
| 5 Reset Button | 12 HDMI Port |
| 6 Power Status LED | 13 LAN1 |
| 7 Power Button | 14 LAN2 |


DIMENSION DIAGRAM

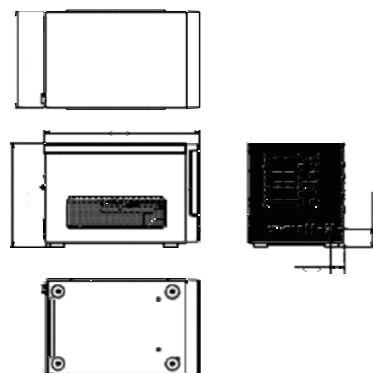

Unit: mm [inch]

SOLUTION ARCHITECTURE

Standalone NVR

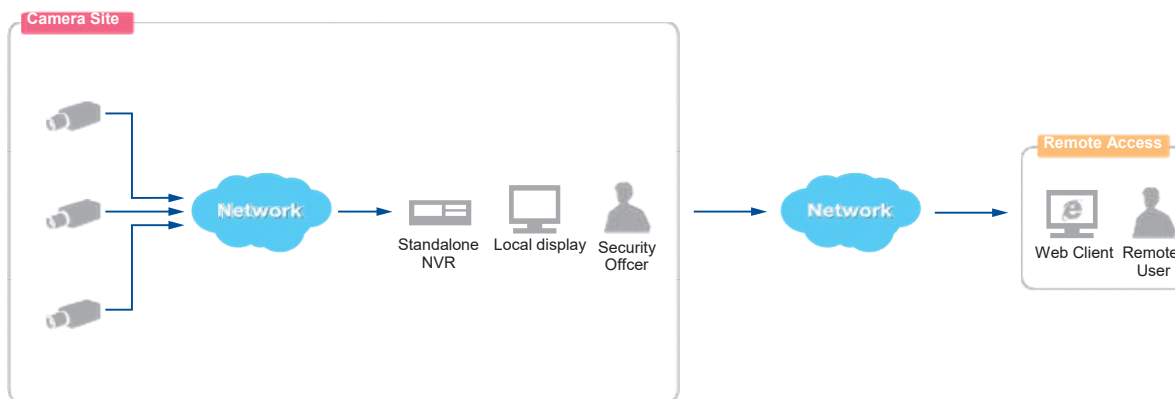

Remote User: Administrator / Supervisor / Manager / Security Officer

PRODUCT SPECIFICATION

ENR-2000

• General

Full Name	ACTi Standalone Network Video Recorder ENR-2000
Maximum Number of Clients	1 local, 2 remote
Maximum Number of Cameras	16
Video Compression	H.264
Audio Compression	PCM, G.711 a-law/u-law (Only support local recording and remote live view/playback, not support local live view/playback)
Maximum display resolution	Up to 2-Megapixel (Local display), Up to 5-Megapixel (Remote display)

• Live View

Display Layout Mode	1,2,4,6,9,10,12,13,16
Layout Tour (Auto Patrol)	Automatic switch between different display layouts
Digital Panel	Zoom in digitally by mouse
Event status	Display status for network/record/motion/DI upon every video region
Live View Performance	The live view frame rate may vary between 1fps and 30fps, depending on the number of channels and camera resolution

• PTZ

Control	Pan, tilt and zoom controls; speed control
Preset Points and Tours	Go/set preset points
Number of Preset Points	32
Default Protocol	URL command

• Recording

Scheduled Recording	Record video with user defined schedule
Event Recording	Record video when the alarm event is triggered, including the pre-event buffered video clip
Event Speed-up Recording	Record I frame only in normal status, and record full frames when the alarm event is triggered
Manual Recording	Instant recording upon mouse click
Recording Frame Rate	Max 480 fps total; Max 30 fps per camera
Maximum Recording Throughput	40 Mbps

• Storage

Interface	Serial ATA
Maximum HDD Capacity	4T x 4
HDD Bay	Maximum 4 disks (disks not included)

• Search & Playback

Time Based Video Search	Search video recordings by time, channel or bookmark
Event Based Video Search	Search event triggered video recordings
Playback Control	Forward and backward playback with speeds 1/2x-1x-32x; pause; stop
Synchronized Playback	16 channels
Manual Snapshot	Create snapshot from playback for export
Video Cropping	Crop a short video clip from long recording file and save it as an independent file; video clip length:(1-30mins)
Video Export	Export video clips in AVI/RAW format via USB storage

• Event Management

Event Trigger	Video motion detection; External device through digital input; Network loss and recovery
Event Response	Record video; Play alert beep; Activate external device through digital output; E-mail notification with snapshots; Event logging; Go to PTZ preset point; Pop-up instant playback

• System

FW Upgrade	FW Upgrade via USB mass storage
Configuration backup/restore	Configuration backup/restore via USB mass storage
Permission Control	Multi-group/users, liveview/playback/setup/remote level permission
Data Backup	USB mass storage
Operating System	Embedded Linux
System Status Monitor	Real time status reports on remote browser
Language	Multi-language support

• Remote Access

PC Web Browser	Microsoft Internet Explorer 8.0 or 9.0
----------------	--

• Hardware

Dimensions (W x H x D)	318 mm x 214 mm x 200 mm (12.5" x 8.4" x 7.9")
Weight	5.32kg (11.8 lb) without HDD
Operating Temperature	0°C~ 40°C(32°F ~ 104°F)
Operating Humidity	10% ~ 85% RH
Power Source / Consumption	100-240V AC 50/60 Hz 200W
Bundled Accessories	Warranty Card / QIG / Mouse / Universal Converter
Approvals	CE (EN 55022 Class B, EN 55024), FCC (Part15 Subpart B Class B) Adapter: CE, FCC, UL, PSE, Efficiency Level V
USB	USB 2.0, 2 ports
Ethernet Port	2, Ethernet (1000 Base-T), RJ-45 connector, Built-in DHCP server support on Ethernet Port 1
Display port	HDMI

• Integration

Unified Solution	Fully compatible with ACTi camera with H.264 compression
------------------	--