

TCM-7411

H.264 Megapixel IP D/N Outdoor
Vandal Proof PoE Rugged Dome




- 1/3" Aptina Progressive Scan CMOS
- Day and night function with mechanical IR cut filter
- Minimum illumination 0.05 Lux at F1.0
- Built-in f3.3 - 12 mm / F1.6 Megapixel vari-focal lens
- 18 fps at 1280 x 1024 resolution
- Selectable H.264, MPEG-4 SP, MJPEG compressions with dual streaming
- Two-way audio
- Video motion detection
- Digital input and digital output
- Wide Dynamic Range
- Vandal proof and weatherproof IP66 rated casing
- Powered by PoE Class 3 / DC 12V

PHOTO INDICATION



- 1 Ethernet Port
- 2 DC 12V Power Input
- 3 Reset Button
- 4 Audio Input / Output & Digital Input / Output

DIMENSION DIAGRAM

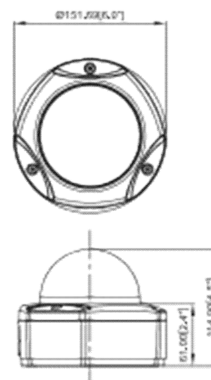

Unit: mm [inch]

ACCESSORY OPTIONS

Dome Cover

PDCX-1101



4-inch, smoke, vandal proof

Popular Mounting Solutions

Surface	Accessories not required
Wall	PMAX-0308 
Pendant	PMAX-0101 PMAX-0103 
Corner	PMAX-0101 PMAX-0303 PMAX-0402 
Pole	PMAX-0101 PMAX-0303 PMAX-0502 
Flush	PMAX-1003 

* For more mounting solutions, please refer to Mounting Accessory section of Buyer's Guide or Project Planner v2.0 on www.acti.com

PRODUCT SPECIFICATION

TCM-7411

• Device

Device Type	Fixed Dome Camera
Image Sensor	Aptina Progressive Scan CMOS
Sensor Size	1/3" (4.8 x 3.6 mm)
Day / Night	Yes
Minimum Illumination	Color: 0.5 lux at F1.0 (30 IRE, 2400°K); B/W: 0.05 lux at F1.0 (30 IRE, 2400°K)
Color to B/W switch	CDS sensor based switch, configurable; DSP based switch, configurable
Mechanical IR Cut Filter	Yes
IR Sensitivity Range	700 - 1100 nm
IR LED	No
Electronic Shutter	1/30 - 1/1,000 sec (60Hz); 1/25 - 1/1,000 sec (50Hz) (manual mode) 1/5 - 1/15,000 sec (auto mode)

• Lens

Focal Length	Vari-focal, f3.3 - 12 mm / F1.6
Iris	Fixed iris
Focus	Manual focus
Horizontal Viewing Angle	78.4° - 23.1°
Viewing Angle Adjustment	Pan: 0° - 360°; Tilt: 0° - 180°; Rotate: 0° - 360°

• Video

Compression	H.264, MPEG-4 SP, MJPEG
Maximum Frame Rate vs. Resolution	18 fps at 1280 x 1024 (SXGA); 26 fps at 1280 x 720 (HD 720p); 30 fps at 640 x 480 (VGA); 30 fps at 320 x 240 (QVGA); 30 fps at 160 x 112 (QQVGA)
Multi-Streaming	Simultaneous dual streams based on two configurations
Bit Rate	28 Kbps - 6 Mbps (per stream)
Bit Rate Mode	Constant, Variable
S/N Ratio	More than 44 dB
Image Enhancement	Wide dynamic range; White balance: automatic, predefined and manual; Brightness; Saturation; Contrast; Sharpness; Automatic gain control; Auto exposure: automatic, predefined and manual; Flickerless
Privacy Mask	4 configurable regions
Text Overlay	User defined text on video
Image Orientation	Image flip and mirror

• Audio

Compression	8 kHz, Mono, PCM, 16 bit encoding
Audio-In	Terminal block
Audio-Out	Terminal block

• Network

Protocol & Service	TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour
Ethernet Port	1, Ethernet (10/100 Base-T), RJ-45 connector
Security	IP address filtering; HTTPS encryption; Password protected user levels

• Alarm

Alarm Trigger	Video motion detection (3 regions); External device through digital input
Alarm Response	Notify control center; Change camera settings; Command other devices; E-mail notification with snapshots; Upload video, snapshot to FTP server; Activate external device through digital output

• Interface

Digital Input	1, TTL, terminal block
Digital Output	1, TTL, terminal block

• General

Power Source / Consumption	PoE Class 3 (IEEE802.3af) / 6.24 W (heater and fan off) PoE Class 3 (IEEE802.3af) / 7.68W (fan on) DC 12V / 4.8 W (heater and fan off) DC 12V / 13.68 W (heater and fan on)
Weight	1040 g (2.29 lb)
Dimensions (Ø x H)	151.69 mm x 114.9 mm (6.0" x 4.5")
Environmental Casing	Weatherproof (IP66 rated); Transparent vandal proof dome cover, up to 659.23 kgF (1453.35 lbF)
Mount Type	Surface, Pendant, Wall, Corner, Pole, Flush
Operating Temperature	-30 °C ~ 50 °C (-22 °F ~ 122 °F) for DC 12V; -5 °C ~ 50 °C (7 °F ~ 122 °F) for PoE
Approvals	CE, FCC, IP66

• Integration

Unified Solution	Fully compatible with ACTi software
ISV Integration	Software Development Kit (SDK) available
Firmware Access Browser	Microsoft Internet Explorer 6.0 or newer

* All specifications are subject to change without notice.

* All brand names and registered trademarks are the property of their respective owners.

www.acti.com

