

# DHI- XVR5808/16/32S

8/16/32 Channel Penta-brid 1080P Lite 2U Digital Video Recorder



- Embedded processor
- H.264+/H.264 dual-stream video compression
- Support HDCVI/AHD/TVI/CVBS/IP video inputs
- Max 12/24/32 channels IP camera inputs, each channel up to 5MP
- Max 48/96/128Mbps Incoming Bandwidth
- Smart Search and Intelligent Video System



## System Overview

Dahua, as a technology leader, is always the first ever developed the shining new technology in the security industry, and today we present XVR. As the perfect solution to upgrade existing video surveillance systems, XVR supports penta-brid access technology such as HDCVI, AHD, TVI, CVBS and IP to effortlessly integrate with popular industry formats, offering an affordable solution loaded with flexible options.

Designed as a full compatibility product, XVR is able to provide end user the simplicity of analog system, namely lower system cost, simple installation and use of existing cable. It is ideal for a wide range of applications such as public safety, retail store, transportation, home protection and education.

## Functions

### Smart H.264+

Smart Codec, H.264+ can reduce up to 70% bit rate and storage requirements without having to invest in new cameras.

### HDCVI/ AHD/TVI/CVBS Auto-detect

The XVR can auto recognize the signal of front-camera without any setting. It makes operation more friendly and convenient.

### 5MP Resolution

The XVR supports 5MP HD resolution (2560 x 1920) IPC input for recording, live viewing.

### Spot Output(XVR5816S and XVR5832S)

It is made for a secondary monitor. This allows the operator to view one special monitor that assigned to selected cameras or video inputs from higher security areas.

### Intelligent Video System (IVS)

With built-in intelligent video analytics, the XVR has the ability to detect and analyze moving objects for improved video surveillance. The XVR provides optional standard intelligence at the edge allowing detection of multiple object behaviors such as abandoned or missing objects. IVS also supports Tripwire analytics, allowing the camera to detect when a pre-determined line has been crossed.

### Face Detection

It is a type technology being used in a variety of applications that search or identify individuals which show front cameras.

### Smart Search

This function helps you get more motion detect video during a short time through drawing a region when playback. It is very useful when an emergency occurs.

### Technical Specification

#### System

|                  |                    |
|------------------|--------------------|
| Main Processor   | Embedded Processor |
| Operating System | Embedded LINUX     |

#### Display

|                      |  |
|----------------------|--|
| Interface            | 8CH: 1 HDMI, 1 VGA, 1 TV<br>16/32CH: 2 HDMI, 1 VGA, 1 TV                 |
| Resolution           | 1920×1080, 1280×1024, 1280×720, 1024×768                                 |
| Multi-screen Display | 8CH: 1/4/8/9/16<br>16CH: 1/4/8/9/16/25<br>32CH: 1/4/8/9/16/25/36         |
| OSD                  | Camera title, Time, Video loss, Camera lock, Motion detection, Recording |

#### Video Detection and Alarm

|                 |   |
|-----------------|---|
| Trigger Events  | Recording, PTZ, Tour, Alarm Out, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips |
| Video Detection | Motion Detection, MD Zones: 396 (22 × 18), Video Loss, Tampering and Diagnosis            |
| Alarm input     | 8/16/16   |
| Relay Output    | 6   |

#### Playback and Backup

|                   |   |
|-------------------|---|
| Playback          | 8CH: 1/4/9<br>16/32CH: 1/4/9/16   |
| Search Mode       | Time /Date, Alarm, MD and Exact Search (accurate to second), Smart search   |
| Playback Function | Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom |
| Backup Mode       | USB Device/Network  |

#### Storage

|              |  |
|--------------|--|
| Internal HDD | 8 SATA Ports, up to 8TB capacity for each disk |
| eSATA        | 1 Port   |

#### Auxiliary Interface

|       |  |
|-------|--|
| USB   | 8CH: 4 USB Ports (4 USB 2.0)<br>16/32CH: 4 USB Ports (2 USB 2.0 , 2 USB 3.0) |
| RS232 | 1 port, for PC communication & Keyboard                                      |
| RS485 | 1 Port, for PTZ Control  |
| RS422 | 1 Port, for PTZ Control  |

#### Third-party Support

|                     |   |
|---------------------|---|
| Third-party Support | Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and more |
|---------------------|---|

#### Audio and Video

|                    |   |
|--------------------|---|
| HDCVI Camera Input | 8/16/32 Channel                             |
| IP Camera Input    | 8+4/16+8/32 Channel, each channel up to 5MP |
| Audio In/Out       | 8/16/16 Audio In, 1 Audio Out, BNC          |
| Two-way Talk       | 1 Mic In, 1 Mic Out, BNC                    |

#### Recording

|                 |  |
|-----------------|--|
| Compression     | H.264+/H.264   |
| Resolution      | 1080P, 1080N, 720P, 960H, D1, HD1, BCIF, CIF, QCIF   |
| Record Rate     | Main stream: 1080P(1~15fps)<br>1080N/720P/960H/D1/HD1/BCIF/CIF/QCIF (1~25/30fps)<br>Sub stream: D1/CIF/QCIF(1~15fps) |
| Bit Rate        | 1Kbps ~ 6144Kbps Per Channel   |
| Record Mode     | Manual, Schedule (Regular, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop   |
| Record Interval | 1 ~ 60 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post-record: 10 ~ 300 sec                                      |

#### Network

|                  |   |
|------------------|---|
| Interface        | 8CH: 1 RJ-45 Port (1000M)<br>16/32CH: 2 RJ-45 Port (1000M)  |
| Network Function | HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search (Support Dahua IP camera, DVR, NVS, etc.) |
| Max. User Access | 128 users   |
| Smart Phone      | iPhone, iPad, Android   |
| Interoperability | ONVIF 2.42, CGI Conformant  |

#### Electrical

|                   |                      |
|-------------------|----------------------|
| Power Supply      | AC100V-240V, 50/60Hz |
| Power Consumption | <35W (Without HDD)   |

#### Environmental

|                      |   |
|----------------------|---|
| Operating Conditions | -10°C ~ +55°C (+14°F ~ +131°F), 0~ 90% RH |
| Storage Conditions   | -20°C ~ +70°C (-4°F ~ +158°F), 0~ 90% RH  |

#### Construction

|              |   |
|--------------|---|
| Dimensions   | 2U, 440mm×455mm×95mm (17.3" x 17.9" x 3.7") |
| Net Weight   | 6.5kg (14.32 lb) (without HDD)              |
| Gross Weight | 9.8kg (21.6lb)                              |
| Installation | Desktop installation/Rack-mounted           |





#### Certifications

|                |   |
|----------------|---|
| Certifications | FCC: Part 15, Subpart B: 2015   |
|                | CE: EN 55032:2015(Class B), EN 55024:2010+A1:2015, EN 50130-4:2011+A1:2014, EN 61000-3-2:2014, EN61000-3-3:2013 |
|                | UL: EN60950-1:2006 + A1:2010 + A11:2009 + A12:2011 + A2:2013  |

**Ordering Information**


| Type                | Part Number  | Description  |
|---------------------|--------------|--|
| 8/16/32 Channel XVR | DHI-XVR5808S | 8 Channel Penta-brid 1080P Lite 2U Digital Video Recorder  |
|                     | DHI-XVR5816S | 16 Channel Penta-brid 1080P Lite 2U Digital Video Recorder |
|                     | DHI-XVR5832S | 32 Channel Penta-brid 1080P Lite 2U Digital Video Recorder |

**Dimensions (mm)**




**Rear Panel**

DHI-XVR5808S

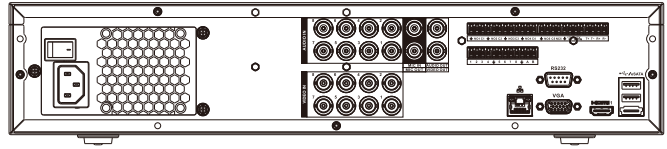

DHI-XVR5816S

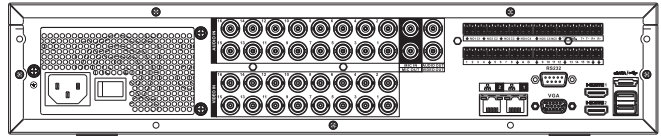

DHI-XVR5832S

