


FW1179-WM (1 Series)

H.264/MJPEG 2M WDR Motorized IR Bullet Camera



Key Features


- 1/3" 2.22M PS MOS Sensor
- 2.8-10mm(F1.2) V/F 2Motor Lens
- Min. Illumination: 0 Lux (IR)
- Max. 30fps@2M(1920x1080)
- Dual Stream(H.264, MJPEG)
- 39 IR LED
- Built-in PoE (Optional)

Supports both ONVIF(ProfileS) and PSIA(v1.0) standards.

Video Encoding	H.264/MJPEG(simultaneous dual stream) H.264/H.264 (true H.264 dual streaming) Simultaneous streaming with independent control
Video signal	N/A
Resolution	1920x1080, 1280x720, 640x352, 320x176, 160x96
Live Casting	Streaming video channels Up to max 30fps@ 2M when simplex
Audio Encoding	N/A
Audio channels	N/A
PTZ support	N/A
Serial Interface	Console, By-pass command to control UART device Serial Input/Output mode (3.3V TTL)
Bandwidth Management	Frame rate control / Bandwidth control / CBR / VBR [Trigger Condition] Video loss / Video recovered / Motion detection (144 area) / Boot finished / Schedule
Alarm Management	[Alarm Service] Image holding service (Max 5.6MByte pre-post alarm buffer), Image upload service through E-mail / FTP (support pre & post), Notification service through TCP / UDP / HTTP
Security	Channel based user password protection for live-cast, PTZ, alarm output and audio
Dynamic IP	Dynamic IP service using www.ipcctvdns.com
Smart Solution	Smart Phone Application (IOS, Android)
Web interface	Live-cast, PTZ control, search through Web browser Minimum PC requirement - Windows XP Pro (IE 6.x or later) , Pentium4 (2Ghz, 2G RAM), Video Card(256MB RAM, 1024x768)
Management Software	Supports 16, 32, 64, 128ch Management Software Full-featured PC NVR with matrix functionality
System Integration	[Protocol] HTTP, RTP/RTSP, TCP/IP, FTP, Telnet, RARP, PPPoE, SNMP, PAP, CHAP, DHCP, NTP, SMTP client, uPNP, and etc. [SDK] Open HTTP API / ActiveX for live cast with audio & PTZ [Service] Image upload / notification service / service for POS integration

Installation & maintenance	Configuration by installation wizard, HTTP, telnet and console. Upgrade firmware through HTTP, telnet & FTP
Misc.	Transmit serial input data with video Quick Time & VLC media player compatible
System hardware	32bit Embedded CPU / Embedded Linux / 128MByte SDRAM / 128MByte NAND Flash
Power	Power Supply - SMPS 12V (1A) [AC100-240V, 50/60Hz, 300mA] Max. Power Consumption - DC12V, 9W
Approvals	IP66, KC, FCC, CE, RoHS
Dimension / Weight	68 Ø x 258.3(L) (in mm) without sunshield About 669g without power supply
External Interface	10/100-Base-T Ethernet (auto-sensing) 1 DI/DO(3.3V TTL) 1 UART port(3.3V TTL) Factory Default Button
Working Environment	Temperature: -10~50 °C, Humidity: 10~90% RH
Image sensor	1/3" progressive scan MOS Total number of pixels: 2010Hx1108V=2.22M Pixel size : 2.75 (H) µm × 2.75 (V) µm Color filter Bayer arrangement of primary colors: R, G, B Bit number of internal ADC: 10/12 bits Parallel output: 37.125 MHz, 10/12 bits Maximum frame rate in all-pixel scan mode: 60/30 fps
Lens	2.8-10mm, V/F, 2Motor, F1.2 WDR(30fps)/3D DNR/DIS Day & Night (Auto/B&W/Off) Auto White Balance Noise Filter (Off/On)
Image Setting	Brightness/Contrast/Sharpness/AGC Gain Control Lens Type (DC/Manual) Shutter (Manual/Auto) Vertical/Horizontal Flip Sens Up Level Frequency Control (50/60)
Minimum illumination	0 Lux (IR)
Options	Built-in PoE (IEEE 802.3af)

Dimensions

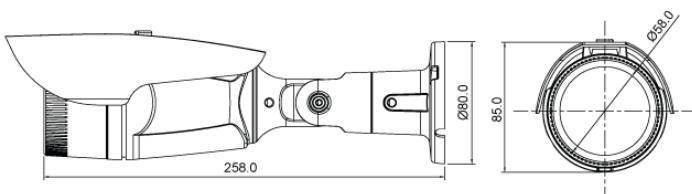

Accessory