

3 Megapixel Vari-focal Economy Star Low-Lux Indoor Dome

FD-300Ne Star

H.264 High Profile • 3MP/2MP Resolution supported @ 30fps

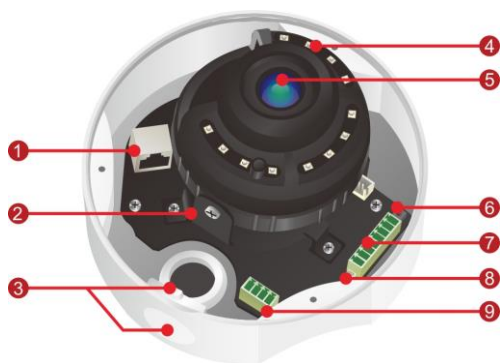


Photo Indication & Dimension Diagram



- Sony STARVIS 3MP Fixed Dome Camera
- SmartFocus® to Get Excellent Image Quality Easily
- HDTV Video Quality (Full HD 3MP @ 30fps)
- Brickcom WDR Enhancement® Technology
- H.264, MPEG-4, and MJPEG Triple-Codec Compression
- i-Mode for Different Environments
- Removable IR-Cut Filter & Auto Light Sensor for Day and Night function
- 1 DI/DO for External Alarm and Sensor Devices
- TV out connector Supported
- 3-Axis Design
- Two-Way Audio
- Built-in Micro SD / SDHC / SDXC Memory Card Slot for Local Storage
- Power over Ethernet/DC 12V/AC 24V Supported



ONVIF



- 1 RJ45 Connector (For Ethernet and 802.3 af PoE)
- 2 Tilt Screw
- 3 Conduit Plug and Hole
- 4 LEDs
- 5 Lens
- 6 Reset Button/Focus Easy Button
- 7 Terminal Block (For Audio in/out, DIDO)
- 8 TV Out Connector
- 9 Terminal Block (For DC12V / AC24V)
- 10 Micro SD Card Slot
- 11 Fan

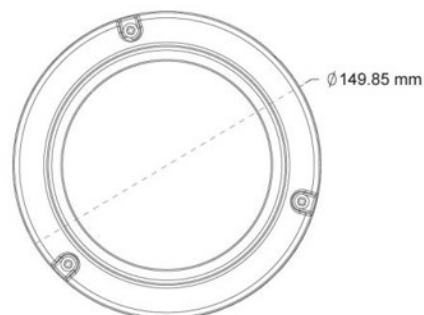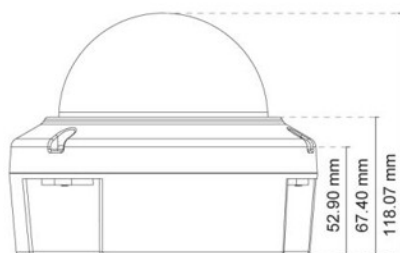

Camera	
Models	FD-300Ne Star
Hardware System	Flash: 32MB RAM: 256MB DDR
Image Sensor	Sensor Type : 1/2.8" Sony Exmor CMOS Sensor Sensor Resolution : 3MP (2048 x 1536)
Lens	Lens Type: Motorized Lens Fixed IRIS: F1.4 Focal Length: f=2.8~12mm View Angle: (H°/V°/D°) (H)95°~33°/(V)68°~24°/(D)116°~41°
Local Storage	Built-in Micro SD/SDHC/SDXC Max.128G Memory Card Slot
Day & Night ICR	Triggered by Light sensor, Scheduling, Digital Input
Minimum Illumination	0 Lux(IR On, B/W) 0.0005 Lux(F1.4,B/W) 0.0006 Lux(F1.4,Color)
IR Illuminators	Built -In IR Illuminators, 30m (Visible distance) 25m (Detail distance) IR LED: 12pcs
Video	
Compression Streaming	H.264 / MPEG4 / MJPEG Simultaneous multiple streams
Video Setting	i-Mode Scene Management: Smart Auto/ Indoor 60Hz/ Indoor 50Hz/ Outdoor / Car License Plate / Schedule/ Digital Input / Entrance & Elevator / Always i-Mode Profile Setting: Auto Exposure Control/Gain/ White Balance Control Manual Exposure Control: 1/120000 s ~ 1 s Manual Gain Control: 1 ~ 48
Image Resolution	3MP (2048 x 1536) ● (30fps) 2MP (1920 x 1080) ● (30fps)
WDR	D-WDR
TV Out	NTSC (30fps) / PAL (25fps)
Events and Alarm Management	
Events	Motion Detection/ Schedule/ Audio Detection/ Digital Input/ Temperature Alarm
Alarm	Stream/Snapshot to FTP/Email/Samba/SD-Card HTTP/Email Notification/ Digital Output

Audio	
Audio Streaming	2-way Audio Support
Audio Compression	G.711/AMR
Audio Input/ Output	Line input (Unbalanced, 1.4 Vp-p, 1 Vrms) / Line output
General	
Communication	Ethernet : one 10/100Mbps RJ-45 Supported Protocols : TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, HTTPS, Samba, PPPoE, UPnP, RTP, RTSP, RTCP, IPv4, IPv6, 802.1x
Power Input	DC12V 1A AC24V 802.3af PoE
Temperature/ Environment	Operating Temperature: -40°C ~ 50°C (-40°F ~ 122°F) Start-up Temperature: -20°C ~ 50°C (-4°F ~ 122°F) Operating Humidity: 10% ~ 90%
Max. Power Consumption	DC12V 1A 8 Watts AC 24V 10.5 Watts 802.3af POE 12.5 Watts
Dimension	149.85(D) X 118.07 (H) mm
Weight	510g/1.13lb
Certification	FCC/CE
Viewing System Requirements	OS: Microsoft Windows 8/7/Vista/XP/2000 Browser: Mozilla Firefox, Internet Explorer 6/7 or above, Safari, Google Chrome Cell Phone: 3GPP player Real Player: 10.5 or above Quick Time: 6.6 or above VLC
Warranty	Limited 24 months warranty

Camera Accessories Options



L-WM-01 v2
Wall mount bracket



CI-802 A
Camera bracket stand



VD-B-ADAP
Camera transfer bracket



PS-588I V3
8 port 10/100M PoE Fast Ethernet Switch



PS-7242IL-AT
24-port 10/ 100M High Power PoE+ Web Smart Ethernet Switch



POE30U V2
High Power PoE Injector