




Features

- 1/3 inch High Sensitivity CCD
- High Resolution : 600 TV Lines
- Built-in DC Iris Vari-focal Lens (f=3.8~9.5mm)
- Built-in IR LED(66EA)
- **Intelligent IR Technology**
- Min Illumination : Night(0.00Lux, IR LED On)
- Built-in Fan/Heater
- Cable Back-Through Bracket
- External Adjustment (Tele/Wide, Near/Far)
- Weather Proof Housing
- 24VAC/12VDC Dual Voltage



DIMENSIONS

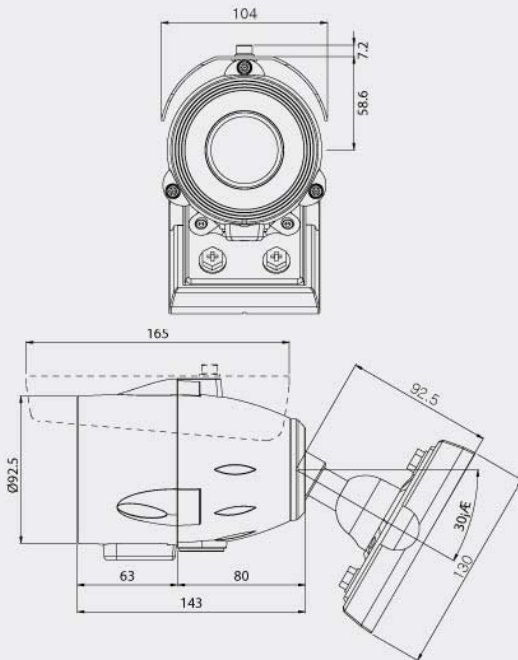

SPECIFICATIONS

Model	WFM-24VF	WFM-25VF
Signal System	NTSC	PAL
Scanning System	2:1 Interlace	
Scanning Frequency (H)	15.734 KHz	15.625 KHz
Scanning Frequency (V)	59.94 Hz	50 Hz
Image Sensor	1/3 Inch High Sensitivity CCD	
Total Pixels	811(H) x 508(V) 410K	795(H) x 596(V) 470K
Effective Pixels	768(H) x 494(V) 380K	752(H) x 582(V) 440K
Horizontal Resolution	600 TV Lines	
Video Output	Composite: 1.0V p-p (75Ω, Composite)	
S/N Ratio	More than 50dB(AGC Off)	
Lens	DC Iris Vari-focal Lens (f=3.8~9.5mm)	
Min.Illumination	Day (0.05Lux), Night(0.00Lux, IR LED On)	
IR LED and Sensor	Intelligent IR Technology. IR LED 66EA (850nm,30°)	
IR LED Visible Range	Max. 50m	
OSD	English, Chinese	
Digital Noise Reduction	Low, Middle, High, Off	
White Balance	Auto	
AGC	On/Off	
SBLC	Off, Low, Middle, High	
Privacy Zone	On/Off (4 Programmable Zone)	
Motion Detection	On/Off (4 Programmable Zone)	
Mirror Function	Horizontal	
Shutter Speed	1/60~1/120,000 Sec.	1/50~1/120,000sec.
Supplied Voltage	24VAC / 12VDC Dual Voltage	
Power Consumption	Max. 10W/0.83A	
Dimensions (ØxWxD)	92.5 x 104x 165 mm	
Weight	Approx. 840g	