



— DWL-P50

5VDC/12VDC Power Over Ethernet Adapter

The DWL-P50 Power over Ethernet adapter is a single-port injector that provides DC power for a non-PoE-equipped device, such as a surveillance camera or a wireless access point. It is designed to operate with LAN switches and other equipment that support industry-standard 802.3af Power over Ethernet (PoE) to deliver operation power to the networked device, allowing you to install the device at places such as on a rooftop or near a ceiling, where power is not easily accessible. The DWL-P50 supports both 5VDC and 12VDC power and can be flexibly deployed with network devices with different power voltage requirements.

Facilitates Installation

The DWL-P50 is useful for installation at a factory or Wi-Fi™ hot spot. This compact adapter allows you to install your surveillance cameras and wireless LAN devices on a building rooftop, on or near a ceiling for maximum coverage. Your cameras or wireless access points can be placed up to 100 meters away from a power source. It is at these places that wall AC outlets are inaccessible and providing power to these locations is difficult and expensive. The DWL-P50 is also handy for installation at offices with Internet telephones connected to a PoE Ethernet switch. It eliminates the need to individually power each IP phone. By transmitting remote power through the standard network cabling, the DWL-P50 does away with the need for an AC outlet at each device location. Only a single Ethernet cable is run to each device instead of separate power and data cables.

Data and DC Power Transmission on the Same Network Cable

On a standard 4-wire UTP Category 5 cable, only two pairs (pins 1, 2, 3 and 6) are used for Ethernet data transfer. At one end, your PoE Ethernet switch inserts DC voltage into the unused wires, taking advantage of the unused pair of the network cable wires. At the other end, the DWL-P50 taps

the DC power from the Ethernet cable for use by the non-PoE device. Consequently, a single Category 5 cable can now carry both Ethernet data and DC power. The idea is to supply the remote end with power and Ethernet connectivity via a single network cable.

Centralized Power Provision, Easy Deployment

In addition to eliminating the need for additional, separate wiring for power, the DWL-P50 is also a useful tool that forms part of your centralized power network installation. A central UPS can be added to the PoE switch, to which all your wireless access points, surveillance cameras and Internet phones are connected. This installation provides uninterrupted power without the need to deploy a separate UPS for each device.

Very Compact Size, Simple Installation

The DWL-P50 is very small in size and lightweight and requires no configuration setting. It is designed for quick and easy deployment, and can be hooked with a simple plug to a network device placed on a high wall or ceiling. This PoE adapter supports both 5V and 12V DC output, allowing you to deploy it with a variety of devices with different power requirements. A built-in slide switch allows you select the required power output.

Key Features

- Provides DC power over existing Category 5 cable to wireless LAN device
- Cuts costs and provides convenience
- Protects wireless LAN device from possible power-surges
- Supports both 5VDC and 12VDC power (selectable through a slide switch)
- Very compact size, lightweight
- Complete plug-and-play installation, no configuration setting or installation tool required
- No software required, O.S.-independent

DWL-P50

Technical Specifications

Power Over Ethernet

Output Voltage

- Input: 48VDC, 400mA
- Output: 5VDC (11.5 watts) or 12VDC (12 watts)
(slide switch selectable)

Ethernet Cable

- TIA/EIA 568 Cat. 5
- Connector: RJ-45

Diagnostic LED

Power

Dimensions

80.9 x 52 x 28 mm (adapter only)

Weight

80 grams (adapter only)

Operating Temperature

0° to 40 °C (32° to 104 °F)

Storage Temperature

-40° to 70 °C (-40° to 158 °F)

Operating Humidity

10% to 80% RH

Storage Humidity

5% to 90% RH

EMI


- FCC Part 15 Class B
- CE Class B

Safety

- UL
- TUV

Box Includes

- DWL-P50 PoE adapter
- Quick Installation Guide
- Ethernet cable
- DC power cable with female power connectors

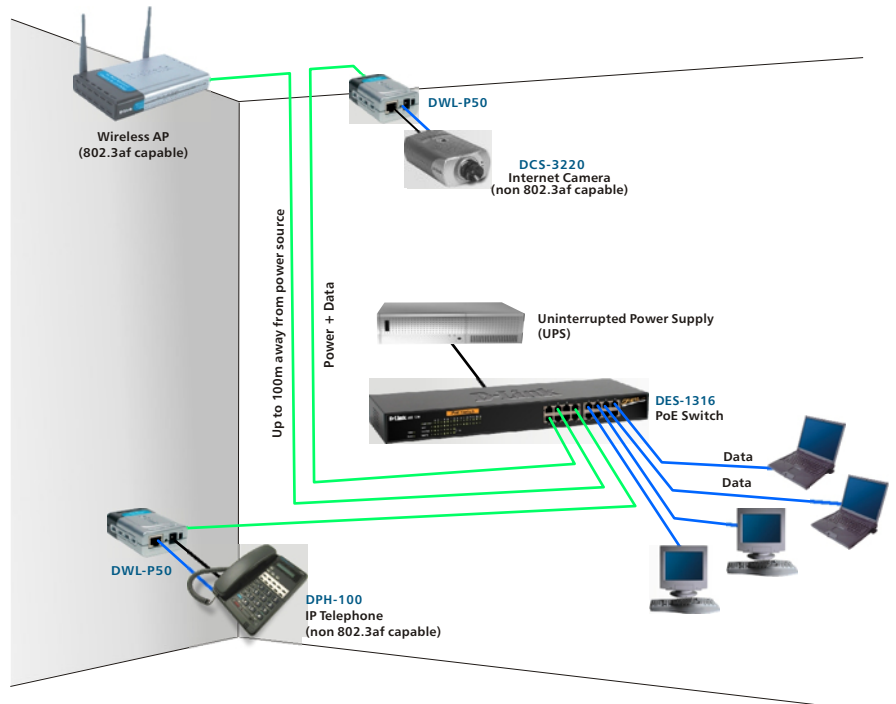

Ordering Information

DWL-P50 Power Over Ethernet Adapter
DES-1316K PoE Switch Kit (1 DES-1316 PoE Switch,
2 DWL-P50 PoE adapters)

D-Link®

Specifications subject to change without prior notice.
D-Link is a registered trademark of D-Link Corporation/D-Link System Inc. All other trademarks belong to their proprietors.

U.S.A	TEL: 1-714-885-6000	FAX: 1-866-743-4905
Canada	TEL: 1-905-8295033	FAX: 1-905-8295223
Europe	TEL: 44-20-8731-5555	FAX: 44-20-8731-5511
Germany	TEL: 49-6196-77990	FAX: 49-6196-7799300
France	TEL: 33-1-30238688	FAX: 33-1-30238689
Netherlands	TEL: 31-10-282-1445	FAX: 31-10-282-1331
Belgium	TEL: 32(0)2-517-7111	FAX: 32(0)2-517-6500
Italy	TEL: 39-2-2900-0676	FAX: 39-2-2900-1723
Iberia	TEL: 34-93-4090770	FAX: 34-93-4910795
Sweden	TEL: 46-(0)8564-61900	FAX: 46-(0)8564-61901
Norway	TEL: 47-23-897189	FAX: 47-22-309085
Denmark	TEL: 45-43-969040	FAX: 45-43-424347
Finland	TEL: 358-9-2707-5080	FAX: 358-9-2707-5081
Singapore	TEL: 65-6774-6233	FAX: 65-6774-6322
Australia	TEL: 61-2-8899-1800	FAX: 61-2-8899-1868
China	TEL: 86-10-5863-5800	FAX: 86-10-5863-5799
India	TEL: 91-022-2652-6696	FAX: 91-022-2652-8914
Middle East (Dubai)	TEL: 9714-3916480	FAX: 9714-3908881
Turkey	TEL: 90-212-335-2553	FAX: 90-212-335-2500
Egypt	TEL: 202-414-4295	FAX: 202-415-6704
Israel	TEL: 972-9-9715700	FAX: 972-9-9715601
Latin America	TEL: 56-2-232-3185	FAX: 56-2-232-0923
Brasil	TEL: 55-11-55039320	FAX: 55-11-55039322
South Africa	TEL: 27-1266-52165	FAX: 27-1266-52186
Russia	TEL: 7-095-744-0099	FAX: 7-095-744-0099#350
Taiwan	TEL: 886-2-2910-2626	FAX: 886-2-2910-1515
D-Link Corp.	TEL: 886-2-2916-1600	FAX: 886-2-2914-6299