


DP-2608NI-E2/8P


Embedded Plug & Play NVR

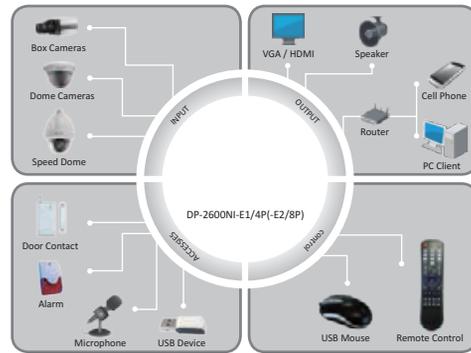

Key features

- Third-party network cameras supported
- Up to 5 Megapixels resolution recording
- HDMI and VGA output at up to 1920×1080P resolution
- 4/8/16-ch network cameras can be connected with 25M/50M/100M incoming bandwidth
- Up to 2 SATA interfaces
- Plug & Play with up to 8 independent PoE network interfaces
- Support network detection, including network delay, packet loss, etc

Rear Panel of DP-2600NI-E1/4P(-E2/8P)

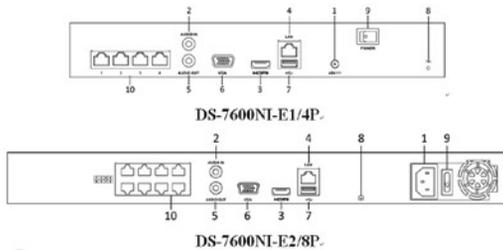

DP-2608NI-E2/8P	
Video/Audio input	
IP video input	8-ch
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)
Network	
Incoming bandwidth	50Mbps
Outgoing bandwidth	80Mbps
Remote connection	128
Video/Audio output	
Recording resolution	5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Frame rate	Main stream: 50 fps (P) / 60 fps (N)
	Sub-stream: 50 fps (P) / 60 fps (N)
HDMI/VGA output	1-ch, resolution: 1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz
Audio output	1-ch, RCA (Linear, 1kΩ)
Decoding	
Live view / Playback resolution	5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Capability	8-ch@720P , 6-ch@1080P
Hard disk	
SATA	2SATA interface for 2 HDDs
Capacity	Up to 4TB for each disk
External interface	
Network interface	1 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface
USB interface	1 × USB 2.0 and 1 × USB 3.0
Alarm in/out(Optional)	4 / 1
PoE	
Interface	8 independent 100 Mbps PoE network interfaces
Max. Power	120W
Supported standard	AF and AT
Others	
Power supply	220V DC
Consumption(without hard disk)	≤ 10W
Working temperature	-10 °C ~ +55 °C (+14 °F~ + 131 °F)
Working humidity	10 % ~ 90 %
Chassis	19-inch rack-mounted 1U chassis
Dimensions(W × D × H)	445 ×290× 45mm
Weight(without hard disk)	≤ 1 Kg (2.2 lb)

1. Power Supply
2. Audio In
3. HDMI Interface
4. LAN Network Interface
5. Audio Out
6. VGA Interface
7. USB Interface
8. Ground
9. Power Switch
10. Network Interfaces with PoE Function