


## Megapixel IP Camera

### V6 Series

Full HD • Real-time



#### Dimension

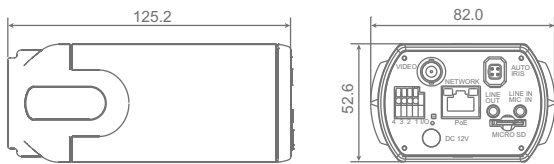

Unit: (mm)

#### Features


- Progressive Scan CMOS Sensor
- NEW** • Full HD 1080p / HD 720p real-time at dual streaming
- NEW** • H.264 and MJPEG compression
- Motion Detection
- Privacy Masks
- Day/Night (ICR)\*
- Auto Iris Lens support\*
- NEW** • Micro SD support\*
- NEW** • BNC analog output\*

### V1 Series

Full HD • Real-time • Compact



#### Dimension

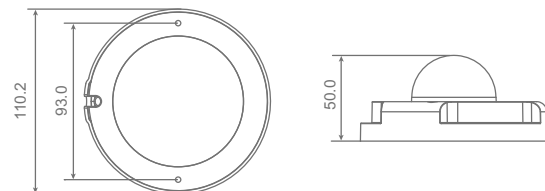

Unit: (mm)

#### Features

- Progressive Scan CMOS Sensor
- NEW** • Full HD 1080p / HD 720p real-time at dual streaming
- H.264 and MJPEG compression
- NEW** • f = 4 mm, F1.5
- Power over Ethernet (802.3af)
- Motion Detection
- Privacy Masks
- Weatherproof Dongle Cable\*
- Weatherproof (IP66 international)
- Micro SD support\*
- NEW** • Security Torx against tampering

Note: Items marked with an asterisk (\*) are optional

## V2 Series


Full HD • Real-time • Vandal Proof




Versatile H.264 IP Camera

### Dimension

Indoor



Outdoor



Unit: (mm)

### Features

- Progressive Scan CMOS Sensor
- NEW** • Full HD 1080p / HD 720p real-time at dual streaming
- H.264 and MJPEG compression
- NEW** • Remote Zoom & Focus (Motorized Lens)\*
- Motion Detection
- Privacy Masks
- Day/Night (ICR)
- NEW** • Micro SD support
- BNC analog output
- Weatherproof (IP66 international)
- Vandal proof dome cover
- NEW** • Sun Shield & Outdoor Mounting Kit

Note: Items marked with an asterisk (\*) are optional



## V3 Series

Full HD • Real-time • Vari-focal



Versatile H.264 IP Camera

### Dimension



Unit: (mm)


### Features

- Progressive Scan CMOS Sensor
- NEW** • Full HD 1080p / HD 720p real-time at dual streaming
- H.264 and MJPEG compression
- Remote Zoom & Focus (Motorized Lens)\*
- NEW** • Lightweight dome cover
- Detachable modular design
- NEW** • 3-Axis position adjustment
- Motion Detection
- Privacy Masks
- Day/Night (ICR)
- Micro SD support

※ Available in 2010 Q3

# Megapixel IP Camera

## Value Chart

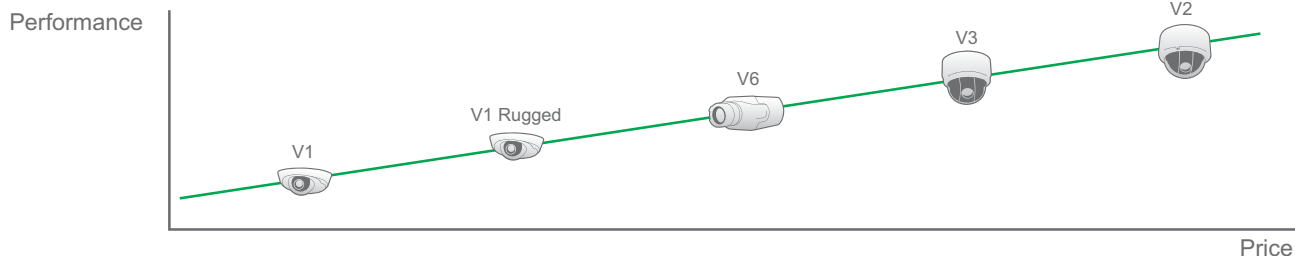

## Comparison Chart

Item	V1	V1 Rugged	V6	V3	V2
CMOS	●	●	●	●	●
Lens	fixed focal	fixed focal	Motorized VF C/CS mount	Manual VF	Motorized VF
ICR	-	-	○	○	○
Built-in Mic	○	-	-	-	-
Audio in	●	-	●	●	●
Audio out	-	-	●	●	●
Alarm	-	-	●	●	●
BNC	-	-	○	●	●
Micro SD	○	○	○	●	●
Weatherproof (IP66)	-	●	-	-	●

● Support ○ Optional - Not support

## Specification

Item	Full HD Real-time	Full HD
<b>Camera</b>		
Image Sensor	1/2.7" Progressive CMOS	1/2.7" Progressive CMOS
Picture Elements	1920(H) × 1080(V)	1920(H) × 1080(V)
Shutter Speed	1~1/10000 sec.	1~1/10000 sec.
White Balance	Manual/ATW (1500 ~ 15000K)	
Digital Zoom	Support	
<b>Operation</b>		
Video Compression	H.264 Main Profile/MJPEG	
Video Streaming	Simultaneously, H.264 + H.264 Simultaneously, H.264 + MJPEG Simultaneously, MJPEG + BNC	
Resolution	H.264: Full HD 1080p/HD 720p MJPEG: Full HD 1080p/HD 720p/D1/CIF	
Frame Rate	H.264: 1080p 25/30fps MJPEG: 1080p 25/30fps	H.264: 720p 25/30fps MJPEG: 720p 25/30fps
Image Setting	Exposure, White Balance, Brightness, Sharpness, Contrast, Saturation, Hue, Image rotation, Motion detection, Privacy Mask	
Audio	Line Out, Line In/Mic In	
Alarm	5V 10kΩ pull up	
Input	Photo relay output 300V DC/AC	
Output		
<b>Network</b>		
Interface	RJ-45, 10/100 Mbps Ethernet	
Protocol	TCP/IP, UDP, RTP, RTSP, HTTP, ICMP, FTP, SMTP, DHCP, PPPoE, UPnP and IGMP	
Password Levels	User and Administrator	
Internet Browser	Internet Explorer (6.0+)	
User Account	20	
<b>General</b>		
Operating Temperature	0°C ~ 50°C (32°F ~ 122°F)	
Power Source	Humidity: 10% to 90%, Non-condensing	
Power Consumption	DC 12V / AC 24V / PoE	
Certificate	4W	
	CE, FCC, RoHS compliant	

Product specification and availability subject to change without notice. Certain product names mentioned herein may be trade names and / or registered trademarks of their companies.