

**DS-2AE7158 series**  
**E Series Analog IR Speed Dome**



## Key feature

### IR function:

- 0 Lux minimum illumination
- Up to 100m IR distance
- IR light MTBF reaching up to 30,000 hours

### System function:

- 1/4" high performance Sony CCD
- $\pm 0.1^\circ$  Preset Accuracy
- Self-adaptive to HIKVISION, Pelco-P/D protocol
- 3D intelligent positioning function
- Power-off memory function: restore PTZ & Lens status after reboot
- Built-in temperature sensor, display internal temperature
- IP66 standard (outdoor dome)
- Scheduled PTZ movement

### Camera function:

- Auto focus, auto white balance, and auto/manual day & night switch
- Privacy masks programmable
- Support 3D DNR, DWDR and digital zoom

### PTZ function:

- 360° endless pan range and -15°-90° tilt range
- 240°/s Pan Preset Speed and 200°/s Tilt Preset Speed
- 0.1°-160°/s Manual Pan Speed and 0.1°-120°/s Manual Tilt Speed
- 256 presets programmable; preset image freezing capability
- 8 patrols, up to 32 presets per patrol
- 4 patterns, with the total recording time not less than 10 minutes
- Proportional zoom function

- Park action: auto call up of PTZ movement, after a defined time of inactivity

## Application Scenarios


It can be widely applied to places with no lights or weak lights requiring wide-area and high-speed monitoring, such as rivers, forests, highways, railways, airports, ports, sentries, squares, parks, scenic sites, streets, stations, large venues, outside of residential areas, etc.

## Specifications

Parameter		Model
		DS-2AE7158-A (24VAC, Outdoor, PAL) DS-2AE7158N-A (24VAC, Outdoor, NTSC) DS-2AE7158-D (12VDC, Outdoor, PAL) DS-2AE7158N-D (12VDC, Outdoor, NTSC)
		<b>E Series IR Speed Dome</b>
Camera	Image Sensor	1/4" Sony CCD
	Effective Pixel	PAL: 752(H)×582(V) NTSC: 768(H)×494(V)
	Horizontal Resolution	Color: 540 TVL B/W: 600 TVL
	Signal System	PAL/NTSC
	Min. illumination	Color: 0.1Lux@( F1.6,AGC ON) B/W: 0.01Lux@( F1.6,AGC ON) 0 Lux with IR
	White Balance	Auto / Manual / ATW / Indoor / Outdoor
	AGC	Auto / Manual
	S / N Ratio	≥ 50dB
	DNR	High/Medium/Low/off
	WDR	128x(On/Off/Auto)
	Shutter Time	PAL: 1-1/10,000s NTSC: 1-1/10,000s
	Day & Night	IR Cut Filter
	Digital Zoom	16x
	Privacy Mask	8 privacy masks programmable; a maximum of 8 zones can be masked simultaneously on the same video screen
	Focus Model	Auto / Semiautomatic / Manual
Lens	Focal Length	3.4-122.4mm, 36X
	Zoom Speed	Approx. 5.4s(Optical Wide-Tele)
	Angle of View	57.8-1.7 degree(Wide-Tele)
	Min. Working Distance	10-1000mm (Wide-Tele)
	Aperture Range	F1.6-F4.5

<b>Pan and Tilt</b>	Pan Range	360°endless
	Pan Speed	Pan Manual Speed: 0.1°-160°/s, Pan Preset Speed: 240°/s
	Tilt Range	-15°-90° (Auto Flip )
	Tilt Speed	Tilt Manual Speed: 0.1°-120°/s, Tilt Preset Speed: 200°/s
	Proportional Zoom	Rotation speed can be adjusted automatically according to zoom multiples
	Number of Preset	256
	Patrol	8 patrols, up to 32 presets per patrol
	Pattern	4 patterns, with the total recording time not less than 10 minutes
	Power-off Memory	Support
	Park Action	Preset / Patrol / Pattern / Pan / Tilt / Auto / Random / Frame / Panorama scan
	PTZ Position Display	On / Off
	Compass	Support , the north can be set
	Scheduled Task	Preset / Patrol / Pattern / Pan / Tilt / Auto / Random / Frame / Panorama scan
<b>Infrared</b>	IR Range	100m
	IR irradiation angle	Automatically adjusted, depending on the zoom ratio
<b>Input/ Output</b>	Monitor Output	1.0V[p-p] / 75Ω, PAL or NTSC composite, BNC
<b>General</b>	Menu Language	English/Chinese
	RS-485 Protocols	HIKVISION, Pelco-P, Pelco-D, self-adaptive
	Power	24 VAC(-A model); 12 VDC(-D model) Max.30W(IR LED On, Heater On) Max.24W(IR LED On) Max.15W(IR LED Off, Heater Off)
	Working Temperature / Humidity	-30 °C-65 °C (-22 °F -149 °F)(outdoor dome) 90% or less
	Protection Level	IP66 standard (outdoor dome) TVS 4,000V lightning protection, surge protection and voltage transient protection
	Mounting	Various mounting modes optional
	Dimensions	Φ245 ×399mm (Φ9.65" ×15.71" ) (Outdoor)
	Weight (approx.)	5.5kg(12.13lbs)
	Mount Option (only suitable for outdoor dome)	Long-arm wall mount: DS-1601ZJ; Pendant mount: DS-1661ZJ(20cm) or DS-1662ZJ(50cm); Ceiling mount: DS-1663ZJ

## Dimensions

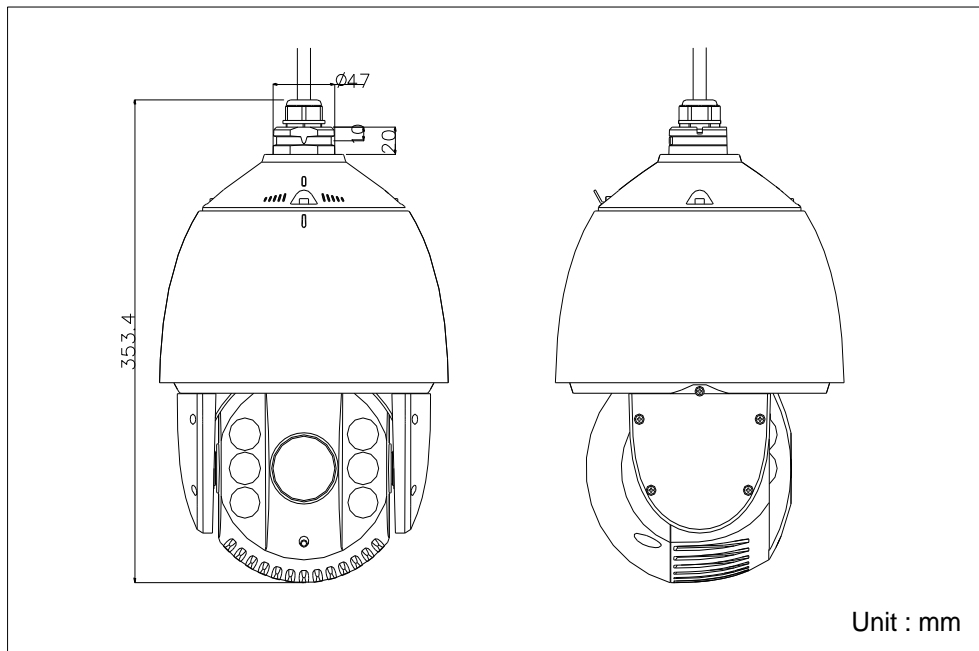

## Order models

- DS-2AE7158-A, PAL, AC24V, outdoor
- DS-2ZE7158N-A, NTSC, AC24V, outdoor
- DS-2AE7158-D, PAL, DC12V, outdoor
- DS-2ZE7158N-D, NTSC, DC12V, outdoor

## Accessories



DS-1601ZJ Long-arm wall mount bracket