



AE-VC022P(N)- ITS

720 TVL IR Mobile Dome CVBS Camera

Key Features:

- 0.1Lux @(F1.2,AGC ON),0 Lux with IR
- Adopt wide-angle lens with wider monitoring coverage
- Support electronic shutter and AGC
- Patented universal regulating mechanism, easy to adjust
- Anti-vibration design and aviation port for mobile environments
- Built-in microphone
- IP65

Application:

Suitable for mobile environments.


Order Model:

AE-VC022P(N)-ITS (2.1mm)

AE-VC022P(N)-ITS (2.8mm)

AE-VC022P(N)-ITS (3.6mm)

Dimensions:

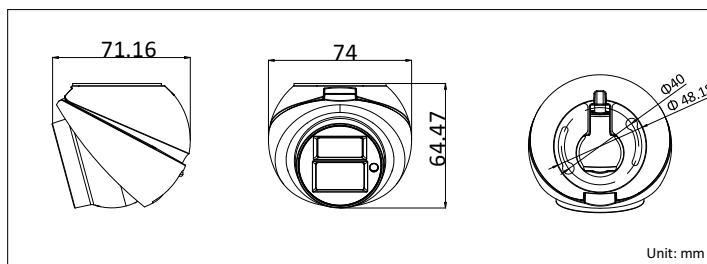

Specification:

Parameter	Model	AE-VC022P(N)-ITS (2.1mm)
		720TVL IR Mobile Dome Camera
Camera		
Image Sensor		1.0Mega Progressive Scan CMOS
Signal System		PAL/NTSC
Resolution		1280(H)×800(V)
Min. Illumination		0.1Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter Time		1/25(30)s to 1/50,000s
Lens		2.1mm (2.8mm、3.6mm optional)
Lens Mount		M12
Angle Adjustment		Pan:0° - 50°; Tilt:0° - 50°; Rotation:0° - 360°
Day & Night		Electronic
Horizontal Definition		720TVL
Synchronization		Internal
Video Output		1Vp-p composite output (75 Ω/Aviation plug)
Audio Input		Built-in Mic
Audio Output		1-ch audio interface(Aviation plug)
S/N Ratio		> 62dB
General		
Working Temperature/Humidity		-40℃~75℃, Humidity 90% or less (non-condensing)
Power Supply		DC6V-16V
Power Consumption		3.5W MAX
IR Range		20-30m
Ingress Protection		IP65
Dimension(mm)		74×64.47×71.16
Weight		400g