

## AE-VC051P(N)-IT

720P IR Mobile Dome CVBS Camera



### Key Features:

- 0.1Lux @(F1.2,AGC ON),0 Lux with IR
- Support electronic shutter, AGC and auto day & night switch
- Adopt wide-angle lens with wider monitoring coverage
- Up to IP68 protection level
- Anti-vibration design and aviation port for mobile environments

### Application:

Suitable for reversing monitoring.


### Order Model:

AE-VC051P(N)-IT(2.1mm)

AE-VC051(N)-IT(2.8mm)

AE-VC051(N)-IT(3.6mm)

### Dimension:

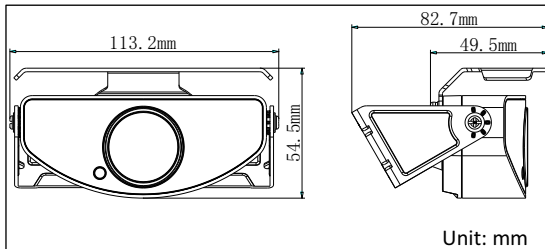

### Specification:

Model	AE-VC051P(N)-IT
Parameter	720TVL IR Mobile Dome Camera
<b>Camera</b>	
Image Sensor	1.0Mega Progressive Scan CMOS
Signal System	PAL/NTSC
Effective Pixels	1280(H)×576(V)
Min. Illumination	0.1Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter Time	1/25(30)s to 1/50,000s
Lens	2.1mm (2.8mm、3.6mm optional)
Lens Mount	M12
Angle Adjustment	Tilt: 90°
Day & Night	Electronic
Horizontal Definition	720TVL
Synchronization	Internal
S/N Ratio	> 62dB
Video Output	1Vp-p composite output (75 Ω/Aviation plug)
<b>General</b>	
Working Temperature/Humidity	-40℃~80℃, Humidity 90% or less (non-condensing)
Power Supply	DC6V-16V
Power Consumption	3.5W MAX
IR Range	20-30m
Protection Level	IP68
Dimension(mm)	89.6×59.1
Weight	400g