

## DS-2CC52C7T-VPIR HD720P Vandal Proof IR Dome Camera



### Key Features

- 1.27 Megapixel high-performance CMOS
- Analog HD output, up to 720P resolution
- Low illumination
- True Day/Night
- OSD menu, 3D DNR, Smart IR
- IP66 weatherproof & vandal proof
- Up the Coax(HIKVISION-C, Pelco-C Protocol)




## Specifications

<b>Camera</b>	
Image Sensor	1.27MP CMOS Image Sensor
Signal System	PAL/NTSC
Effective Pixels	1305(H)*977(V)
Min. illumination	0.001 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter Time	1/25(1/30)s to 1/50,000s
Lens	2.1mm, 2.8mm
	Angel of view: 115°(2.1mm), 92.6°(2.8mm)
Lens Mount	M12
Day & Night	ICR
Angle Adjustment	Pan: ±5°, Tilt: 43.5±3.5°, Rotation: ±0°
Synchronization	Internal synchronization
WDR	120dB
Video Frame Rate	720p@25fps/720p@30fps
HD Video Output	1 Analog HD output
CVBS Output	1Vp-p Composite Output(75Ω/BNC)
Audio Input	Built-in Mic
Audio Output	1-ch BNC audio interface (line level, 1kΩ)
S/N Ratio	>62dB
<b>Menu</b>	
Auto Gain	Support
D/N Mode	Auto/Color/BW
White Balance	Auto/Manual
Private Mask	On/Off, maximum 8 zones
Motion Detection	On/Off, maximum 4 zones
Language	English/Chinese
Function	3D DNR、 Digital Zoom、 Slow Shutter(16X)、 Mirror
<b>General</b>	
Operating Conditions	-30°C~65°C(-22 °F ~ 149 °F), Humidity 90% or less (non-condensing)
Power Supply	12 VDC ± 15%
Power Consumption	Max. 4W
Protection Level	IP66
Impact protection	IK10
IR Range	10-20m
Communication	Up the coax, Protocol: Pelco-C(CVBS output), HIKVISION-C(TVI output)
Dimensions	Φ239.8×39.7mm(Φ9.44×1.56)
Weight	1100g


## Order Models

**DS-2CC52C7T-VP1R**

## Dimensions

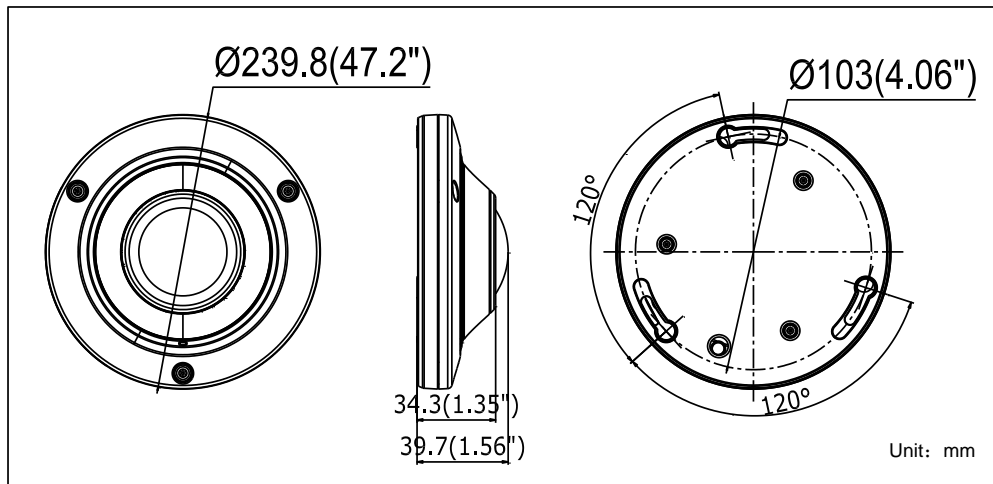

## Accessories



**DS-1274ZJ-DM28**  
Corner mount



**DS-1H18**  
Video Balun



**X41T**  
Camera Tester

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

### Hikvision Poland

T +48-22-460-01-50  
poland@hikvision.com

### Hikvision USA

T +1-909-895-0400  
sales.usa@hikvision.com

### Hikvision India

T +91-22-28469900  
sales@pramahikvision.com

### Hikvision UK

T +44-1628-9021-4  
support.uk@hikvision.com

### Hikvision Europe

T +31-23-5542770  
saleseuro@hikvision.com

### Hikvision Italy

T +39-0438-6902  
info.it@hikvision.com

### Hikvision Singapore

T +65-6684-4718  
sg@hikvision.com

### Hikvision Middle East

T +971-4-8816086  
salesme@hikvision.com

### Hikvision France

T +33(0)1-85-330-444  
info.fr@hikvision.com

### Hikvision Oceania

T +61-2-8599-4233  
salesau@hikvision.com

### Hikvision Russia

T +7-495-669-67-99  
saleru@hikvision.com

### Hikvision Spain

T +34-91-737-16-55  
info.es@hikvision.com

### Hikvision Hong Kong

T +852-2151-1761

**20150918**