

DS-2CE16C2T-IT5



Key Features

- 1.3 Megapixel high-performance CMOS
- Analog HD output, up to 720P resolution
- True Day/Night
- DNR, Smart IR
- EXIR technology, up to 80m IR distance
- IP66 weatherproof

Specification


| | |
|-------------------|---|
| Model | DS-2CE16C2T-IT5 |
| Parameter | Turbo HD720p EXIR Bullet Camera |
| Camera | |
| Image Sensor | 1.3MP CMOS Image Sensor |
| Effective Pixels | 1280(H)*960(V) |
| Min. Illumination | 0.01 Lux @(F1.2,AGC ON), 0 Lux with IR |
| Shutter Time | 1/25(1/30) s to 1/50,000 s |
| Lens | 3.6mm (6mm, 8mm, 12mm, 16mm optional) |
| | Angle of View: 78°(3.6mm), 51.2°(6mm), 36°(8mm), 23°(12mm), 17.9°(16mm) |
| Lens Mount | M12 |
| Day & Night | ICR |
| Angle Adjustment | Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360° |
| Synchronization | Internal synchronization |
| Video Frame Rate | 720p@25fps/720p@30fps |
| HD Video Output | 1 Analog HD output |
| S/N Ratio | > 62dB |
| General | |
| Working | -40 °C - 60 °C (-40 °F - 140 °F) |

| | |
|-----------------------|---|
| Temperature/Humidity | Humidity 90% or less (non-condensing) |
| Power Supply | 12V DC \pm 15% |
| Power Consumption | Max. 4W |
| Weather Proof Ratings | IP66 |
| IR Range | Up to 80m |
| Dimensions | 105×104.8×263.1mm(4.13" ×4.13" ×10.36") |
| Weight | 800 g (1.76 lbs) |

Order Model

DS-2CE16C2T-IT5

Dimensions

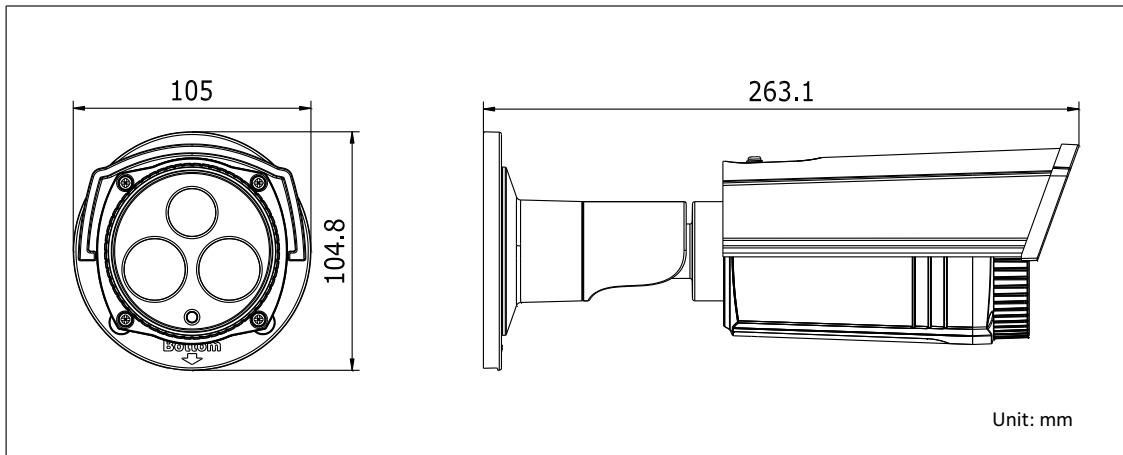

Accessories



DS-1275ZJ
Vertical Pole Mounting



DS-1260ZJ
Junction box



DS-1280ZJ-S
Junction box



DS-1H18
Video Balun



DS-TT-X41T
TVI Tester

