


## DS-6400HDI-T-JX ATCA Standard Video Decoder

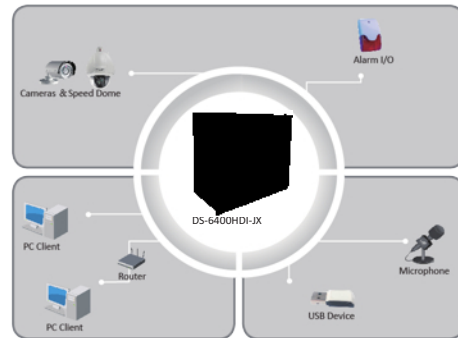

### Key features

- H.264 /MPEG4/MPEG2/Private video stream supported
- Up to 1920×1080P resolution decoding
- 8 slots available for audio/video output modules (DS-6408HDI-T-B )
- Each DS-6408HDI-T-B module provides 8-ch 5MP/16-ch 1080P/32-ch 720P/64-ch 4CIF video stream decode
- HDMI and DVI output at up to 1920×1080P resolution
- Standard rack-mounted chassis structure (8U 19")
- Pluggable modular design provides high flexibility

### Rear Panel of DS-6400HDI-T-JX



1. BNC Video Output
2. DVI Video Output
3. LINE IN/OUT (3.5mm connector)
4. AUDIO OUT(DB15 connector)
5. RS-232 Serial Interface
6. LAN, 10/100/1000 Mbps Ethernet interface
7. RS-485 serial interface, ALARM IN, ALARM OUT
8. Power supply
9. GND

DS-6400HDI-T-JX	
Chassis Component	
Chassis	DS-6464-T Chassis
Number of Slots	8 slots for audio/video output modules
Audio/Video Output (Single DS-6408HDI-T-B Module)	
CVBS Output	4-ch BNC outputs, resolution: PAL: 704×576, NTSC: 704×480
DVI Output	8-ch DVI output, resolution: 1080P: 1920×1080@60/50Hz UXGA: 1600×1200@60Hz 720P: 1280×720@60/50Hz SXGA: 1280×1024@60Hz XGA: 1024×768@60Hz
Audio Output	8-ch, DB15 connector
Audio/Video Decoding (Single DS-6408HDI-T-B Module)	
Video Stream Format Supported	H.264 /MPEG4/MPEG2/Private
Audio Stream Format Supported	G.722/G.711A/G.711U/MPEG2-L2/ACC
Video Decoding Resolution	1080P(1920×1080P), 720P(1280×720P), UXGA(1600×1200), SVGA(800×600), VGA(640×480)
Video Decoding Channels	8-ch at 5MP / 16-ch at 1080P / 32-ch at 720P /64-ch at 4CIF resolution
Multi-division Display Mode	1/4/9/16
Screen Jointing Mode	1*2, 2*1, 2*2, 2*3, 3*2, 2*4, 4*2
Frame Rate	PAL: 1/16-25fps, NTSC: 1/16-30fps
External Interface (Single DS-6408HDI-T-B Module)	
Network Interface	1RJ45 10/100/1000Mbps self-adaptive Ethernet interface
Serial Interface	1 RS-232 (DB9); 1 RS-485
Two-way Audio In	1-ch, 3.5 mm connector (2.0 Vp-p, 1 kΩ)
Two-way Audio Out	1-ch, 3.5 mm connector (2.0 Vp-p, 1 kΩ)
Alarm In	4
Alarm Out	4
General	
Power Supply	549W (factory configuration: single power supply )
Power Consumption	≤ 350 W
Working Temperature	-10°C ~ 50°
Working Humidity	10% ~ 90%
Chassis	19-inch standard rack-mounted 8U chassis
Dimensions (W × D ×H)	482.6 × 279.3× 443.7 mm
Weight	≤ 22 kg