


## DS-7P04NI-E1/4P and DS-7P00NI-E2/8P (16P) SERIES PoE NVR

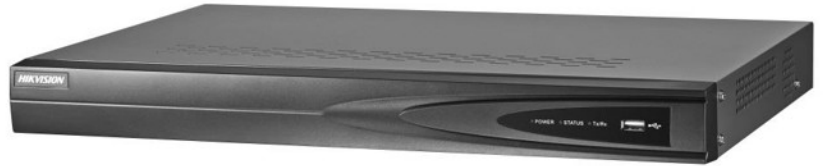

### Features and Functions

#### Video Input and Transmission

- Up to 4/8/16/32-ch ONVIF conformant IP cameras input
- Live view of the connected camera at up to 6MP resolution

#### Compression and Recording

- H.264+ compression improves encoding efficiency by up to 50% and reduces data storage costs
- Full channel recording at up to 6MP resolution

#### Video Output

- HDMI output and VGA output at up to 1920×1080p resolution

#### Storage and Playback

- Up to two SATA interfaces (up to 4TB of capacity per HDD)
- Up to 16-ch synchronous playback at 4CIF resolution
- Smart search for efficient playback
- USB 3.0 provides high-speed file transfer and backup

#### Smart Function

- Supports multiple VCA(Video Content Analytics) events for IP cameras

#### Network & Ethernet Access

- Hik-Connect for easy network management
- Gigabit Ethernet network interface
- 4/8/16 independent PoE network interfaces provided



## Specifications


Model		DS-7P04NI-E1/4P	DS-7P08NI-E2/8P
Video/Audio input	IP video input	4-ch	8-ch
	Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)	
Network	Incoming bandwidth	40 Mbps	80 Mbps
	Outgoing bandwidth	80 Mbps	
	Remote connection	32	
Video/Audio output	Recording resolution	6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF	
	Frame rate	Main stream: 50 fps (P)/60 fps (N)	
		Sub-stream: 50 fps (P)/60 fps (N)	
	HDMI/VGA output	1-ch, resolution: 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
Audio output	1-ch, RCA (Linear, 1kΩ)		
Decoding	Live view/Playback resolution	6MP/5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF	
	Capability	4-ch@1080p	8-ch@720p, 5-ch@1080p
Network management	Network protocols	TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS	
Hard disk	SATA	1 SATA interface for 1 HDD	2 SATA interfaces for 2 HDDs
	Capacity	Up to 4TB for each disk	
External interface	Network interface	1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface	
	USB interface	1 × USB 2.0 and 1 × USB 3.0	
	Alarm in/out (Optional)	4/1	
PoE	Interface	4 independent 100 Mbps PoE network interfaces	8 independent 100 Mbps PoE network interfaces
	Max. Power	50 W	120 W
	Supported standard	AF and AT	
General	Power supply	48 VDC	100 to 240 VAC
	Consumption (without hard disk and PoE)	≤ 10 W	
	Working temperature	-10 °C to +55 °C (14 °F to 131 °F)	
	Working humidity	10 % to 90 %	
	Chassis	Standalone 1U chassis	385 mm chassis
	Dimensions (W × D × H)	315 × 240 × 48 mm (12.4" × 9.4" × 1.9")	385 × 315 × 52 mm (15.2" × 12.4" × 2.0")
	Weight (without hard disk)	≤ 1 kg (2.2 lb)	

## Specifications


Model		DS-7P16NI-E2/8P	DS-7P32NI-E2/8P	DS-7P16NI-E2/16P	DS-7P32NI-E2/16P
Video/Audio input	IP video input	16-ch	32-ch	16-ch	32-ch
	Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)			
Network	Incoming bandwidth	160 Mbps			
	Outgoing bandwidth	80 Mbps			
	Remote connection	128			
Video/Audio output	Recording resolution	6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF			
	Frame rate	Main stream: 50 fps (P)/60 fps (N)			
		Sub-stream: 50 fps (P)/60 fps (N)			
	HDMI/VGA output	1-ch, resolution: 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz			
Audio output	1-ch, RCA (Linear, 1kΩ)				
Decoding	Live view/Playback resolution	6MP/5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF			
	Capability	16-ch@4CIF, 12-ch@720p, 6-ch@1080p			
Network management	Network protocols	TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS			
Hard disk	SATA	2 SATA interfaces for 2 HDDs			
	Capacity	Up to 4TB for each disk			
External interface	Network interface	1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface			
	USB interface	1 × USB 2.0 and 1 × USB 3.0			
	Alarm in/out (Optional)	4/1			
PoE	Interface	8 independent 100 Mbps PoE network interfaces	16 independent 100 Mbps PoE network interfaces		
	Max. Power	120 W	200 W		
	Supported standard	AF and AT			
General	Power supply	100 to 240 VAC			
	Consumption (without hard disk and PoE)	≤ 10 W	≤ 15 W		
	Working temperature	-10 °C to +55 °C (14 °F to 131 °F)			
	Working humidity	10 % to 90 %			
	Chassis	385 mm chassis			
	Dimensions (W × D × H)	385 × 315 × 52 mm (15.2" × 12.4" × 2.0")			
Weight (without hard disk)	≤ 1 kg (2.2 lb)				

## Physical Interfaces

DS-7P00NI-E1/4P

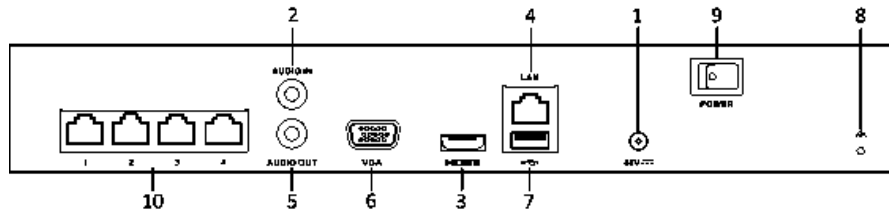

DS-7P00NI-E2/8P

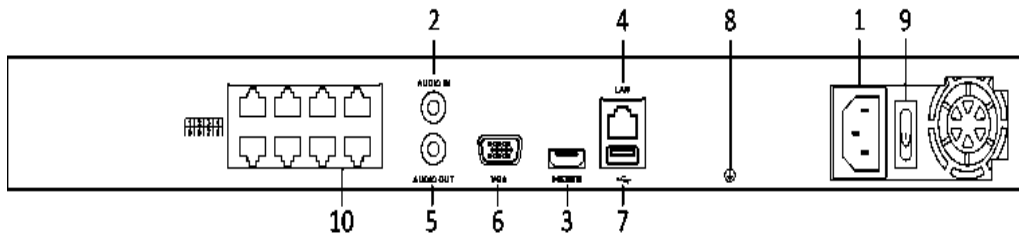

The rear panel of DS-7P16NI-E2/16P and DS-7P32NI-E2/16P provides 16 independent 100 Mbps PoE network interfaces.

Index	Description	Index	Description
1	Power Supply	5	VGA Interface
2	Audio In	6	USB Interface
3	HDMI Interface	8	Ground
4	LAN Network Interface	9	Power Switch
5	Audio Out	10	Network Interfaces with PoE Function

## Available Models

DS-7P04NI-E1/4P;  
 DS-7P08NI-E2/8P, DS-7P16NI-E2/8P, DS-7P32NI-E2/8P;  
 DS-7P16NI-E2/16P, DS-7P32NI-E2/16P.



### Headquarters

No.555 Qianmo Road, Binjiang District,  
 Hangzhou 310051, China  
 T +86-571-8807-5998  
 overseasbusiness@hikvision.com

**Hikvision USA**  
 T +1-909-895-0400  
 sales.usa@hikvision.com

**Hikvision Europe**  
 T +31-23-55-42-770  
 info.eu@hikvision.com

**Hikvision Middle East**  
 T +971-4-8816086  
 salesme@hikvision.com

**Hikvision Russia**  
 T +7-495-669-67-99  
 saleru@hikvision.com

**Hikvision India**  
 T +91-22-28469900  
 sales@pramahikvision.com

**Hikvision Italy**  
 T +39-0438-6902  
 info.it@hikvision.com

**Hikvision France**  
 T +33(0)1-85-330-450  
 info.fr@hikvision.com

**Hikvision Spain**  
 T +34-91-737-16-55  
 info.es@hikvision.com

**Hikvision Poland**  
 T +48-22-460-01-50  
 poland@hikvision.com

**Hikvision UK**  
 T +01628-902140  
 support.uk@hikvision.com

**Hikvision Singapore**  
 T +65-6684-4718  
 sg@hikvision.com

**Hikvision Oceania**  
 T +61-2-8599-4233  
 salesau@hikvision.com

**Hikvision Canada**  
 T +1-909-895-0400  
 sales.usa@hikvision.com

**Hikvision Korea**  
 T +82-31-731-8841  
 sales.korea@hikvision.com

**Hikvision Brazil**  
 T +55 11 3318-0050  
 Latam.support@hikvision.com

**Hikvision Africa**  
 T +27 (10) 0351172  
 sale.africa@hikvision.com

**Hikvision Hong Kong**  
 T +852-2151-1761