


DS-8104HMI-B Series Mobile DVR



Key Features

- Each channel supports up to 4CIF encoding
- Dual stream
- Anti-shock technology
- 2x2.5" pluggable SATA HDD/SSD
- Built-in 3G(cdma2000/WCDMA) module (optional)

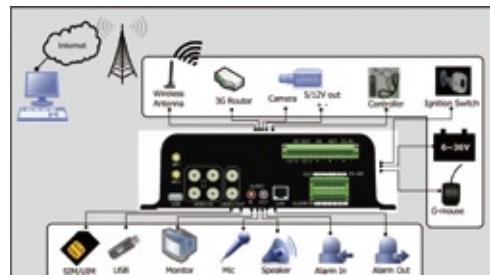

Specifications

DS-8104HMI-B(/GE)(/GW)		
Video/Audio input	Video compression	H.264
	Video input	4-ch
	Video input interface	BNC (PAL/NTSC adaptive; 1.0Vp-p, 75Ω)
	Audio compression	OggVorbis, 16Kbps
	Audio input	1-ch
	Audio input interface	RCA (2.0~2.4Vp-p, 1000Ω)
Video/Audio output	Preview resolution	4CIF (PAL: 704x576, NTSC: 704x480)
	Recording resolution	4CIF/DCIF/2CIF/CIF/QCIF
	Video output	2-ch, BNC (PAL/NTSC adaptive; 1.0Vp-p, 75Ω)
	Frame rate	4CIF: 6fps, DCIF: 12fps, 2CIF: 15fps, CIF/QCIF: 25(P)/30(N)
	Stream type	Video/Video&Audio
	Video bit rate	32kbps~2048kbps adjustable, or user-defined
Hard disk driver	Audio output	1-ch, RCA (2.0~2.4Vp-p, 600Ω)
	Interface type	2 SATA interface
	Capacity	Each interface supports up to 2TB capacity
External interface	Technical patent	Hard disk vibration-proof technology
	Communication interface	1 RJ45 10M/100M adaptive Ethernet interface, 1 RS-485 interface
	3G antenna interface	2 antennas, SMA interface
	USB interface	1 USB interface, USB 2.0
	Alarm input	4-ch
	Alarm output	1-ch
	Remote control	IR remote controller
General	GPS	connect external GPS module via RS-485 port
	Power input	6-36VDC adaptive
	Power output	12V/2A DC, 5V/2A DC output, built-in resettable fuse
	Power off delay	Shut down delay after ignition off (5min~6h)
	Scheduled on/off	Daily scheduled power on/off (00:00~24:00)
	Consumption	≤10W
	Working temperature	-15°C~+55°C(5°F~131°F)
	Working humidity	10%~95%
Dimension		210(D)x236(W)x73mm(H)(8.27"(D)x9.29"(W)x2.87"(H))
Weight (without HDD)		≤3000g(6.60lbs)

Available Models

DS-8104HMI-B, DS-8104HMI-B/GE, DS-8104HMI-B/GW

* /GE: built-in cdma2000 module;

* /GW: built-in WCDMA module;

* Not support built-in 3G module and USB interface simultaneously.