


## DS-8104HMI-M Series Mobile DVR



### Key Features

- Each channel supports up to 4CIF encoding
- Dual stream
- Support Up to 32 GB SD/SDHC card local storage
- Built-in 3G(cdma2000/WCDMA) module (optional)
- Built-in GPS Module

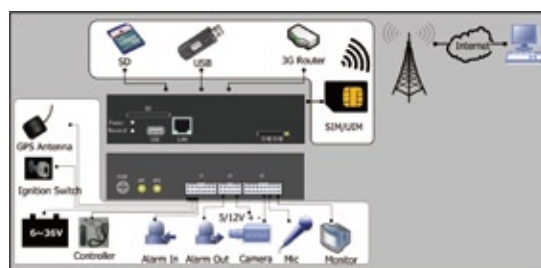

### Specifications

		DS-8104HM-M(/GE)/GW
Video/Audio input	Video compression	H.264
	Video input	4-ch
	Video input interface	Aviation interface (PAL/NTSC adaptive; 1.0Vp-p, 75Ω)
	Audio compression	OggVorbis, 16kbps
	Audio input	2-ch
	Audio input interface	Aviation interface(2.0~2.4Vp-p, 1000Ω)
Video/Audio output	Preview resolution	4CIF (PAL: 704x576, NTSC: 704x480)
	Recording resolution	4CIF/DCIF/2CIF/CIF/QCIF
	Video output	1-ch, (PAL/NTSC adaptive; 1.0Vp-p, 75Ω)
	Frame rate	4CIF: 6fps, DCIF: 12fps, 2CIF: 15fps, CIF/QCIF: 25(P)/30(N)
	Stream type	Video/Video&Audio
	Video bit rate	32kbps~2048kbps adjustable, or user-defined
External interface	Audio output	1-ch, (2.0~2.4Vp-p, 600Ω)
	Communication interface	1 RJ45 10M/100M adaptive Ethernet interface, 1 RS-485 interface
	3G antenna interface	2 antennas, SMA interface
	USB interface	1 USB interface, USB 2.0
	SD card interface	Support 1 SD/SDHC card for recording
	Alarm input	7-ch input, the 8th channel is reserved
	Alarm output	2-ch
	Remote control	Special remote controller/IR remote controller
	GPS	built-in module, 1 antenna, SMA interface
General	Power input	6-36VDC adaptive
	Power output	12V/2A DC, 5V/2A DC output, built-in resettable fuse
	Power off delay	Shut down delay after ignition off (5min~6h)
	Scheduled on/off	Daily scheduled power on/off (00:00~24:00)
	Consumption	≤10W
	Working temperature	-15°C~+55°C(5°F~131°F)
	Working humidity	10%~95%
	Dimension	105(D)×155(W)×45mm(H)(4.13"(D)×6.10"(W)×1.77"(H))
Weight(without HDD)	≤1000g(2.20lbs)	

### Available Models

DS-8104HMI-M, DS-8104HMI-M/GE, DS-8104HMI-M/GW

\* /GE: built-in cdma2000 module;

\* /GW: built-in WCDMA module;