

VCU-A014-ITIR

7MP 1" Progressive Scan CCD Camera



- 1" Progressive Scan CCD
- Auto-iris
- 3392x2008 @ 25fps
- H.264/MJPEG
- Support white light or IR light

- Support speed measurement (with external speed measuring radar)
- Wrong-way Detection
- Support most of the countries and regions of Mid-East, Africa, Asia-Pacific, America and Europe, Australia




Specifications

| Camera | |
|-------------------------------|---|
| Image Sensor | 1" Progressive Scan CCD |
| Shutter Speed | 1 s - 1/100,000 s |
| Day & Night | IR Cut Filter |
| Digital Noise Reduction | 3D DNR |
| Compression Standard | |
| Video Compression | H.264/MJPEG |
| Picture Format | JPEG |
| H.264 Type | Baseline Profile/Main Profile/High Profile |
| Video Bit Rate | 32 Kbps – 16 Mbps |
| Smart Feature-set | |
| Function | Support license plate recognition, Speed Measurement, Wrong-way Detection |
| Light Supplement Control | Supplement light synchronous with White or IR LED strobe-flash light |
| Image | |
| Max. Resolution | 3392×2008 |
| Main Stream | 50Hz: 25fps (3392×2008, 1920× 1080, 1280 × 720) |
| Sub Stream | 50Hz: 25fps (352 × 288) |
| Image Setting | Rotate mode, saturation, brightness, contrast, sharpness adjustable by client software or web browser |
| SVC | Support |
| Network | |
| Network Storage | Support Micro SD/SDHC/SDXC card (128G), local storage, ANR |
| Protocols | TCP/IP, HTTP, HTTPS, FTP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, IPv6, UDP, |
| API | ONVIF (Version 2.1), PSIA, ISAPI |
| Interface | |
| Communication Interface | 1 RJ45 10M/100M/1000M Ethernet port, 5 RS-485 interface,1 RS-232 interface |
| Video Output | 1Vp-p composite output (75 Ω/BNC) |
| Trigger Input | 7 external input, |
| Trigger Output | 7 (photoelectric coupling isolation 2500VAC), 2 relay output |
| On-board storage | Built-in Micro SD/SDHC/SDXC slot, up to 128 GB |
| General | |
| Operating Conditions | -20 °C – 60 °C(-4°F to +140°F), 5%~95%@40°C (104°F), non-condensing |
| Power Supply | 100VAC~240VAC; Frequency: 48Hz~52Hz |
| Power Consumption and Current | <30W |
| Protection Level | IP54 |
| Dimensions | 180mm(W)×152.7mm(H)×636mm(D)(7.09×6.01×25.04 inch) |
| Weight | 6.5±0.5kg(14.3lb±1.1lb) |


Available Models:

VCU-A014-ITIR

Dimensions

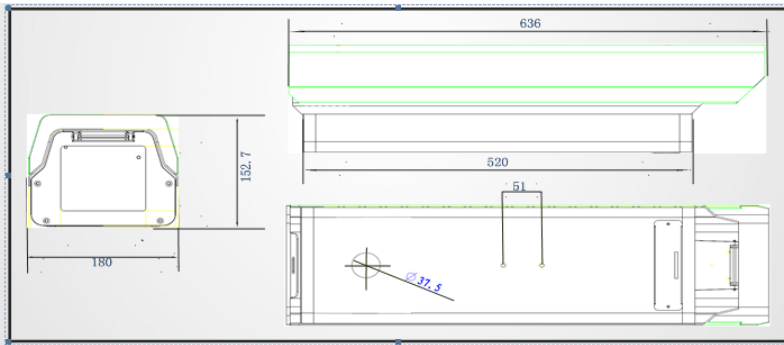

Distributed by

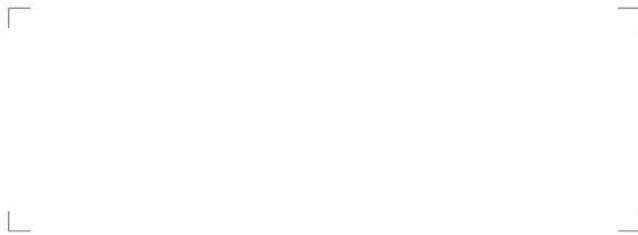

HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Africa
T +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

050401160509