

## iDS-7200HUHI-K2/4S SERIES TURBO ACUSENSE



### Features and Functions

#### VCA Detection

- Deep learning-based analysis: re-recognition of the human body or vehicle target in behavior detection to filter false alarm, supports 4-ch detection

#### Video Input and Transmission

- Self-adaptive HDTV/HD/SD/Analog/CVBS signal input
- When enhanced IP mode enabled, up to 8-ch 8 MP IP cameras input for iDS-7204HUHI-K2/4S; 16-ch 8 MP IP cameras input for iDS-7208HUHI-K2/4S
- 8 MP/5 MP/4 MP HDTV video input and live view for iDS-7208HUHI-K2/4S, and 5 MP/4 MP for iDS-7204HUHI-K2/4S
- Defogging function enabled for the supported analog cameras
- Long distance transmission over UTP and coaxial cable: max. 800m for 1080p and 1200m for 720p HDTV signal

#### Compression and Recording

- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 encoding for the main stream, and H.265/H.264 for the sub-stream of analog cameras
- Connectable to H.265+/H.265/H.264+/H.264 IP cameras
- H.265 Pro+/H.265 Pro can be enabled to improve encoding efficiency and reduce data storage costs
- Full channel recording at up to 5 MP resolution for iDS-7204HUHI-K2/4S and 8 MP for iDS-7208HUHI-K2/4S

#### Video Output

- Simultaneous HDMI/VGA output
- HDMI output at up to 4K (3840 × 2160) resolution for iDS-7208HUHI-K2/4S
- Separate CVBS output

#### Storage and Playback

- 2 SATA interfaces (up to 10 TB capacity per HDD)
- 4/8-ch synchronous playback
- Smart search for efficient playback
- Supports the 3<sup>rd</sup> party cloud storage (Dropbox/Google Drive/Microsoft OneDrive)

#### Smart Function

- Supports multiple VCA (Video Content Analytics) events for both analog and smart IP cameras
- Supports 2-ch sudden scene change detection
- VCA information overlay in live view and smart playback

#### Network & Ethernet Access


- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- 1 RJ45 10M/100M self-adaptive Ethernet interface for iDS-7204HUHI-K2/4S, and 1 RJ45 10M/100M/1000M self-adaptive Ethernet interface for iDS-7208HUHI-K2/4S
- Output bandwidth limit configurable, up to 96M for iDS-7204HUHI-K2/4S and 128M for iDS-7208HUHI-K2/4S



## Specifications

Model	iDS-7204HUHI-K2/4S		iDS-7208HUHI-K2/4S		
<b>Video/Audio input</b>	<b>Video compression</b>	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264			
	<b>Analog video input</b>	4-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection	8-ch		
	<b>HDTV input</b>	5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25	8 MP, 5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25		
	<b>AHD input</b>	5 MP, 4 MP, 1080p25, 1080p30, 720p25, 720p30			
	<b>HDCVI input</b>	4 MP, 1080p25, 1080p30, 720p25, 720p30			
	<b>CVBS input</b>	PAL/NTSC			
	<b>IP video input</b>	Up to 8-ch		Up to 16-ch	
		Up to 8 MP resolution			
		Supports H.265+/H.265/H.264+/H.264 IP cameras			
	<b>Audio compression</b>	G.711u			
<b>Audio input</b>	4-ch, RCA (2.0 Vp-p, 1 KΩ)				
<b>Video/Audio output</b>	<b>CVBS output</b>	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480			
	<b>HDMI/VGA output</b>	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	<b>VGA:</b> 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz <b>HDMI:</b> 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
	<b>Encoding resolution@ Frame rate</b>	Main stream: 5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)	Main stream: 8 MP@8fps/5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)		
		Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N)			
	<b>Video bit rate</b>	32 Kbps to 10 Mbps			
	<b>Audio output</b>	1-ch, RCA (Linear, 1 KΩ)			
	<b>Audio bit rate</b>	64 Kbps			
	<b>Dual stream</b>	Support			
	<b>Stream type</b>	Video, Video & Audio			
	<b>Synchronous playback</b>	4-ch	8-ch		
<b>Network management</b>	<b>Remote connections</b>	32	64		
	<b>Network protocols</b>	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF			
<b>Hard disk</b>	<b>SATA</b>	2 SATA interfaces			
	<b>Capacity</b>	Up to 10 TB capacity for each disk			
<b>External interface</b>	<b>Two-way audio input</b>	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the 1 <sup>st</sup> audio input)			
	<b>Network interface</b>	1, RJ45 10M/100M self-adaptive Ethernet interface	1, RJ45 10M/100M/1000M self-adaptive Ethernet interface		
	<b>USB interface</b>	2 × USB 2.0			
	<b>Serial interface</b>	RS-485 (half-duplex)			
	<b>Alarm in/out</b>	4/1	8/4		
<b>General</b>	<b>Power supply</b>	12 VDC			
	<b>Consumption (without HDD)</b>	≤ 10 W	≤ 20 W		
	<b>Working temperature</b>	-10 °C to +55 °C (+14 °F to +131 °F)			
	<b>Working humidity</b>	10% to 90%			
	<b>Dimensions (W × D × H)</b>	380 × 320 × 48 mm (15.0 × 12.6 × 1.9 inch)			
	<b>Weight (without HDD)</b>	≤ 1.16 kg (2.6 lb)	≤ 1.78 kg (3.9 lb)		

## Physical Interfaces

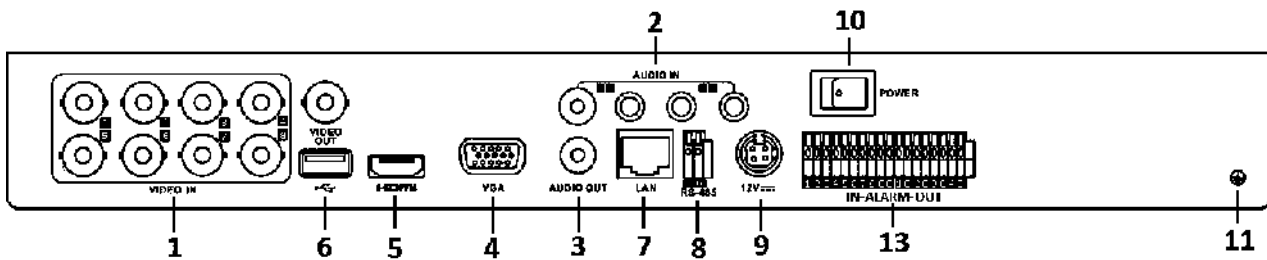

### NOTE

The rear panel of iDS-7204HUHI-K2/4S provides 4 video input interfaces.

Index	Description	Index	Description
1	VIDEO IN	8	RS-485 Serial Interface
2	AUDIO IN, RCA Connector	9	12 VDC Power Input
3	AUDIO OUT, RCA Connector	10	Power Switch
4	VGA Interface	11	GND
5	HDMI Interface	12	VIDEO OUT
6	USB Interface	13	Alarm In/Out
7	LAN Network Interface		

## Available Models

iDS-7204HUHI-K2/4S, iDS-7208HUHI-K2/4S

Distributed by



## HIKVISION

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Africa**  
T +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision Europe**  
T +31-23-55-42-770  
info.eu@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Korea**  
T +82-31-731-8841  
sales.korea@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +01628-902140  
support.uk@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com