


P Series IP Camera

OND-P3610 • OND-P3620



2 MP Network IR Outdoor Vandal Proof Dome Camera

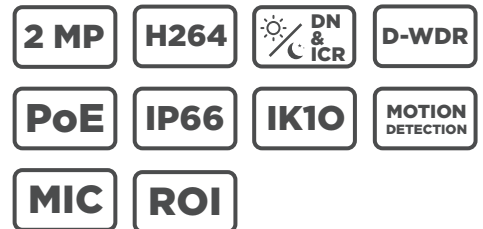

Features

- 2MP (1920 x 1080) resolution (real time)
- H264 / MJPEG codec
- 3D DNR, Digital WDR
- Infrared Cut Filter (ICR), true day/night
- Motion Alarm and ROI
- Three streams support
- Microphone input

Series	P Series 2MP, H.264+, Dome Type	
---------------	------------------------------------	--

Camera	OND-P3610	OND-P3620
Image Sensor	1/2.7" CMOS	
Image Size	1920 x 1080	
Electronic Shutter	1/25s ~ 1/100000s	
Min.Illumination	0.05 lux@F 1.2 AGC ON; 0 lux with IR	
Lens	3.6 mm @F1.6, angle of view: 77° (2.8 mm, 6 mm optional)	2.8 ~ 12 mm @F1.4, angle of view : 96° ~ 35° Φ14
Lens Mount	M12	
Angle Adjustment	Pan : 0°~240°, Tilt : 0°~68°, Rotation : 0°~220°	Pan : 0°~360°, Tilt : 0°~77°, Rotation : 0°~360°

Image

Video Compression	H.264 / MJPEG
Resolution	1080P (1920x1080), 720P (1280x720), D1, CIF,
Main Stream	60Hz : 1080P(1 ~ 30fps) / 720P(1 ~ 30fps) 50Hz : 1080P(1 ~ 25fps) / 720P(1 ~ 25fps)
Bit Rate	128 Kbps ~ 6 Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser

Interfaces

Network	RJ45
Audio	MIC IN x 1

Functions

Remote Monitoring	IE browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 4 users; Support multi-stream real time transmission
Network Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Storage	Network remote storage
Smart Alarm	Motion alarm,
Day & Night	ICR
PoE	Yes
IR Distance	10 ~ 20 m 20 ~ 30 m
Water-Proof	IP66

Others

Power Supply	DC12V / PoE
Power Consumption	< 3.5 W < 3.5 W
IR Consumption ON	< 4 W < 5.5 W
Operating Environment	-20 °C ~ 50 °, 10 % ~ 90 % humidity
Dimensions (mm)	Φ116 × 91 Φ150 × 114
Weight (net)	606 g 956 g
Installation	Pendent mounting (Wall mounting available with the junction box and bracket)

