

P Series IP Camera

ONL-P3610 • ONL-P3620



Series P Series
2MP, H.264+, Bullet Type

Camera	ONL-P3610	ONL-P3620
Image Sensor	1/2.7" CMOS	
Image Size	1920 x 1080	
Electronic Shutter	1/25s ~ 1/100000s	
Min.Illumination	0.05 lux@F 1.2 AGC ON; 0 lux with IR	
Lens	3.6 mm @F1.6, angle of view: 77° (2.8 mm, 6 mm optional)	2.8 ~ 12 mm @F1.4, angle of view : 96° ~ 35°
Lens Mount	M12	Φ14
Angle Adjustment	Any angle	

Image

Video Compression	H.264 / MJPEG
Resolution	1080P (1920x1080), 720P (1280x720), D1, CIF,
Main Stream	60Hz : 1080P(1 ~ 30fps) / 720P(1 ~ 30fps) 50Hz : 1080P(1 ~ 25fps) / 720P(1 ~ 25fps)
Bit Rate	128 Kbps ~ 6 Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser

Interfaces

Network	RJ45
Audio	MIC IN × 1


Functions

Remote Monitoring	IE browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 4 users; Support multi-stream real time transmission
Network Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Storage	Network remote storage
Smart Alarm	Motion alarm,
Day & Night	ICR
PoE	YES
IR Distance	20 ~ 30 m
Water-proof	IP66

Others

Power Supply	DC12V (PoE power supply optional)
Power Consumption	< 3.5 W
IR Consumption ON	< 6 W
Operating Environment	-20 °C ~50 °, 10 % ~ 90 % humidity
Dimensions (mm)	Φ 87 × 219
Weight (net)	578 g
Installation	Wall mounting, pendent mounting

2 MP Network IR Outdoor Bullet Camera

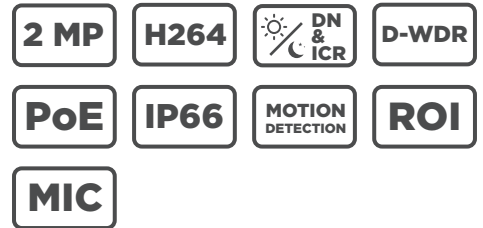

Features

- 2MP (1920 x 1080) resolution (real time)
- H264 / MJPEG codec
- 3D DNR, Digital WDR
- Infrared Cut Filter (ICR), true day/night
- Motion Alarm and ROI
- Three streams support
- Microphone input
- Up to 30 meter IR Distance
- PoE Power Supply
- IP66 protection

