

PR-N7732-S4 SERIES NVR



Features and Functions

Video Input and Transmission

- Up to 32-ch ONVIF conformant IP cameras input (max. incoming bandwidth: 160 Mbps)
- Live view of the connected camera at up to 6 MP resolution

Compression and Recording

- H.264+ compression improves encoding efficiency by up to 50% and reduces data storage costs
- Full channel recording at up to 6 MP resolution

Video Output

- HDMI output and VGA output at up to 1920×1080p resolution

Storage and Playback

- Four SATA interfaces (up to 6TB of capacity per HDD)
- Up to 16-ch synchronous playback at 4CIF resolution
- Smart search for efficient playback
- USB 3.0 provides high-speed file transfer and backup

Smart Function

- Supports multiple VCA(Video Content Analytics) events for IP cameras

Network & Ethernet Access


- Hik-Connect for easy network management
- 2 Gigabit Ethernet network interfaces



Model			PR-N7732-S4
Video/Audio input	IP video input		32-ch
	Two-way audio	1-ch, RCA (2.0 Vp-p, 1kΩ)	
Network	Incoming bandwidth		160 Mbps
	Outgoing bandwidth	80 Mbps	
	Remote connection		128
Video/Audio output	Recording resolution	6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF	
	Frame rate	Main stream: 50 fps (P)/60 fps (N)	
		Sub-stream: 50 fps (P)/60 fps (N)	
	HDMI/VGA output	1-ch, resolution: 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
Audio output	1-ch, RCA (Linear, 1kΩ)		
Decoding	Live view/Playback resolution	6MP/5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF	
	Capability		16-ch@4CIF, 12-ch@720p, 6-ch@1080p
Network management	Network protocols	TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS	
Hard disk	SATA	4 SATA interfaces for 2 HDDs + 1 DVD-R/W (default), or 4 HDDs	
	eSATA (Optional)	1 eSATA interface	
	Capacity	Up to 6TB capacity for each HDD	
External interface	Network interface	2 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interfaces	
	Serial interface	RS-232 and RS-485	
	USB interface	2 × USB 2.0 and 1 × USB 3.0	
	Alarm in/out	16/4 (optionally can be expanded to 16/8)	
General	Power supply	100 to 240 VAC	
	Consumption (without hard disk or DVD-R/W)		≤ 20 W
	Working temperature	-10 °C to +55 °C (14 °F to 131 °F)	
	Working humidity	10 % to 90 %	
	Chassis	19-inch rack-mounted 1.5U chassis	
	Dimensions (W × D × H)	445 × 400 × 71 mm (17.5" × 15.7" × 2.8")	
Weight (without hard disk or DVD-R/W)	≤ 4 kg (8.82 lb)		



Physical Interfaces

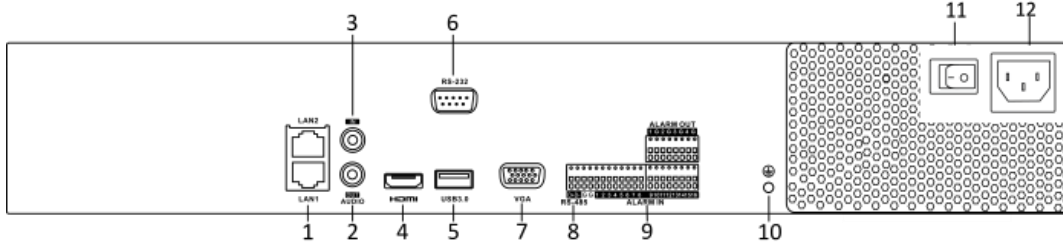

Index	Description	Index	Description
1	LAN1 and LAN2 Network Interfaces	7	VGA Interface
2	AUDIO OUT	8	RS-485 Serial Interface
3	AUDIO IN	9	ALARM IN and ALARM OUT
4	HDMI Interface	10	GND
5	USB 3.0 Interface	11	100 to 240VAC Power Input
6	RS-232 Serial Interface	12	Power Switch

Platform Güvenlik Sistemleri İth.İhr.Tic.Ltd.Şti

🏠 KAPTANPAŞA MH DARÜLACEZE CD BİLAŞ İŞ MERKEZİ B BLOK NO:33 KAT:2 D:33 OKMEYDANI ŞİŞLİ / İSTANBUL

🌐 www.platformguvenlik.com.tr

🌐 www.bayisen.com.tr

🌐 www.prolook.com.tr

☎ 0212 222 66 66

✉ info@bayisen.com.tr

✉ info@platformguvenlik.com.tr

☎ 0212 222 66 66

