



PR-TVIF2H1T-FITS HD 5MP IR Fisheye Camera



Key Features

- 5 Megapixel high-performance CMOS
- 1.1mm Fisheye Lens
- Analog HD output, up to 5 Mega resolution
- 0.01Lux @ (F1.2,AGC ON), 0 Lux with IR
- IR cut filter with auto switch
- OSD menu
- Built-in microphone, 1-ch audio output
- Up the coax, Protocol: PROLOOK-C




Specifications

Model	PR-TVIF2H1T-FITS
Camera	
Image Sensor	5Mega Progressive Scan CMOS
Effective Pixels	2592(H)×1944(V)
Min. illumination	0.01 Lux @ (F1.2,AGC ON), 0 Lux with IR
Shutter Time	1/12.5s to 1/20,000s
Lens	1.1mm
Lens Mount	M12
Day & Night	ICR
Angle Adjustment	Pan: 0°-30°; Tilt: 0°; Rotate: 0°
Synchronization	Internal Synchronization
Video Frame Rate	5Mega@12.5fps
HD Video Output	1-ch BNC Output
Audio In	Built-in Mic
Audio Out	1-ch, BNC Output, (Output Impedance: 1KΩ)
Menu	
Mounting Type	Ceiling/Wall
Ceiling Mounting Display Mode	Default, Panorama, 4 PTZ, Fisheye & 3 PTZ, Annular, Mini-fisheye & 1 PTZ, Annular & 2 PTZ
Wall Mounting Display Mode	Default, Panorama, 4 PTZ, Fisheye & 3 PTZ, Panorama & 3 PTZ
D/N Mode	Color/BW/AUTO
Functions	Brightness, Contrast, Saturation
General	
Operating Conditions	-20 °C to 60 °C (-4 °F to 140 °F), Humidity 90% or less (non-condensing)
Power Supply	DC12V±15%
Power Consumption	5.5W MAX
IR Range	10-20m
Communication	Up the coax, Protocol: PROLOOK-C
Dimensions	Φ120.4mm×54.5mm (Φ4.74"×2.14")
Weight	Approx. 350g (0.77lb)



Dimensions

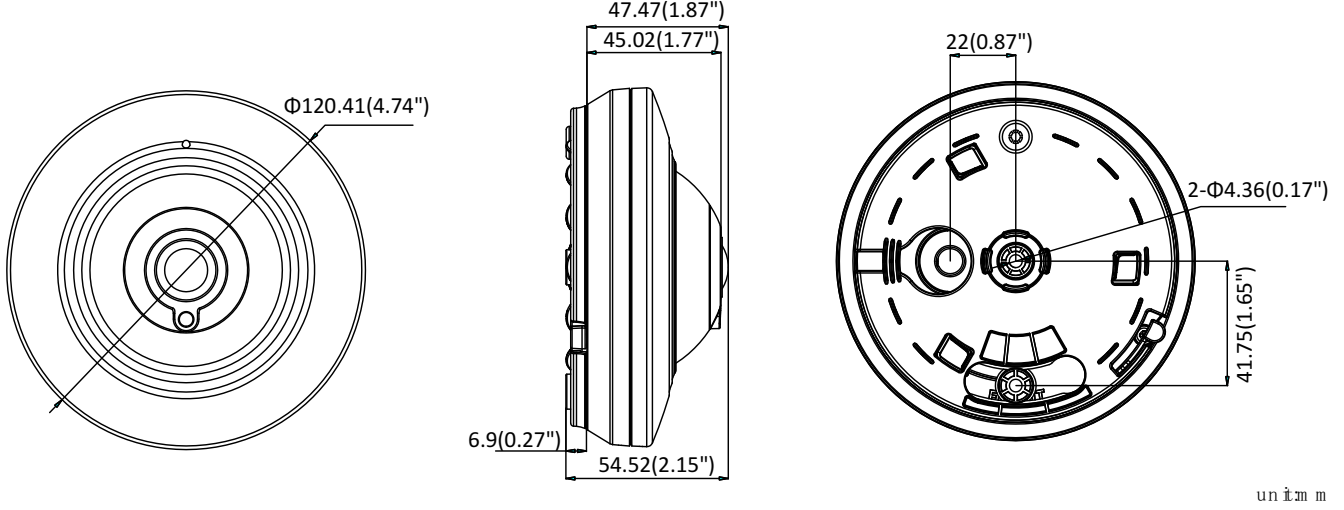

Platform Güvenlik Sistemleri İth.İhr.Tic.Ltd.Şti

🏠 KAPTANPAŞA MH DARÜLACEZE CD BİLAŞ İŞ MERKEZİ B BLOK NO:33 KAT:2 D:33 OKMEYDANI ŞİŞLİ / İSTANBUL

🌐 www.platformguvenlik.com.tr

🌐 www.bayisen.com.tr

🌐 www.prolook.com.tr

☎ 0212 222 66 66

✉ info@bayisen.com.tr

✉ info@platformguvenlik.com.tr

☎ 0212 222 66 66

