

SN-IPR54/04BGDN(II)


1080P Network IR Bullet



Key features

- 1/2.7" Progressive Scan CMOS
- 2.8-12mm ,3.6mm optional
- 1080P@30fps
- Multiple Streams
- IR Up to 40m
- Low bitrate control
- 3D DNR,dWDR,ICR
- Support ROI, Corridor mode, HLC

Dimension

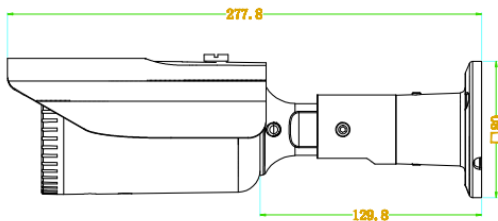

Accessories



SN-CBK629A

Specifications

CAMERA		
Image Sensor	1/2.7" Progressive Scan CMOS	
Min. illumination	Color :0.2Lux@(F1.2,AGC ON);B/W: 0 Lux@(IR LED ON)	
Day & Night	ICR	
Shutter Speed	1/1-1/10000	
Auto Iris	Fixed	
Wide Dynamic Range	dWDR	
Digital Noise Reduction	2D/3D	
Lens	2.8-12mm	3.6mm
FOV	90° -35°	85°
IR LED	30pcs	
IR Range	Up to 40m	
IMAGE		
Video Compression	H.264 High/Main/Baseline Profile, MJPEG	
Bit Rate (CBR/VBR)	Main stream:500kb-12000kb ; Sub stream 100kb-6000kb	
Audio Compression	G.711 ,RAW_PCM	
Max. Resolution	1920x1080/30fps	
Stream	Stream1 1920x1080/1280x720 Stream 2 D1 to QVGA	
Image Setting	Rotate Mode, Saturation, Brightness, Contrast,Sharpness	
HLC	Yes	
9:16 Corridor mode	Yes	
ROI	Yes	
Defog	N/A	
NETWORK		
Network Protocols:	IPv4,802.1x,HTTP,HTTPS,TCP/IP,UDP/IP,RTSP,DHCP,NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ICMP ,IGMP, Unicast and Multicast	
Alarm Trigger	Motion Detection, Network disconnect, Disk alarm	
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.	
Security	User security authentication, Reset, Hardware Watch Dog	
Web Language	English, Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian (Sunell Brand)	
System Compatibility	Onvif	
Interface		
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector	
Audio I/O	N/A	
Alarm I/O	N/A	
RS485	N/A	
BNC Output	N/A	
Reset Button	N/A	
Edge Storage	N/A	
GENERAL		
Power Supply	DC12V/POE	
Power Consumption	2.5W(IR LED OFF); 5W (IR LED ON)	
Operating Temperature	Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F)	
Operating Humidity	0% - 90% RH	
Ingress Protection	IP66	
Approvals	CE / FCC	
Product Dimensions	277.8x80mm	
Product Weight	800g	