




Key features

- 1/3 " Progressive Scan CMOS
- 2.8-12mm lens,3.6mm Optional
- 25fps/30fps@4MP(2592x1520)
- Multiple Streams
- Smart IR Up to 35m
- Low bitrate control
- 3D DNR,WDR,ICR
- Support ROI,Corridor mode,HLC

Dimension

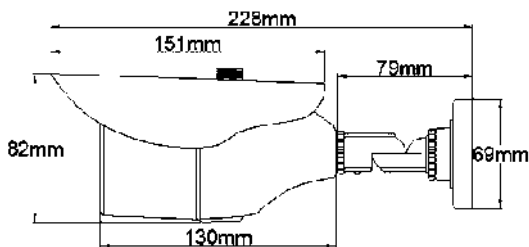

Accessories



SN-BK319



SN-CBK629A

Specifications

CAMERA	
Image Sensor	1/3" Progressive Scan CMOS
Min. illumination	Color :0.05Lux@(F1.2,AGC ON);B/W: 0 Lux@(IR LED ON)
Day & Night	ICR
Shutter Speed	1/5-1/20000
Auto Iris	Fixed
Wide Dynamic Range	WDR >120dB
Digital Noise Reduction	2D/3D
Lens	2.8-12mm 3.6mm
FOV	90° -35° 85°
IR LED	24pcs
IR Range	Up to 35m
IMAGE	
Video Compression	H.265/H.264/ MJPEG
Bit Rate (CBR/VBR)	Main stream: 1080P: 500Kbps~12Mbps , 720P: 200Kbps~8Mbps ; Sub stream 100Kbps~6Mbps
Audio Compression	G.711 ,RAW_PCM
Max. Resolution	2592x1520/30fps
Stream	Stream 1 2592x1520/2560x1440/2304x1296/1920x1080/1280x720 Stream 2 D1 to QVGA Stream 3 2592x1520/2560x1440/2304x1296/1920x1080/1280x720/D1/VGA/640 x 360/CIF/QVGA
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
HLC	Yes
9:16 Corridor mode	Yes
ROI	Yes
Defog	N/A
NETWORK	
Network Protocols:	IPv4,802.1x,HTTP,HTTPS,TCP/IP,UDP/IP,RTSP,DHCP,NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ICMP ,IGMP, Unicast and Multicast
Alarm Trigger	Motion Detection, Network Disconnect, Disk Alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware Watch Dog
Web Language	English, Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian (Sunell Brand)
System Compatibility	Onvif
Interface	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	N/A
Alarm I/O	N/A
RS485	N/A
BNC Output	N/A
Reset Button	N/A
Edge Storage	N/A
GENERAL	
Power Supply	DC12V/POE
Power Consumption	2.5W(IR LED OFF); 5W (IR LED ON)
Operating Temperature	Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F)
Operating Humidity	0% - 90% RH
Ingress Protection	IP66
Approvals	CE / FCC
Product Dimensions	Φ228*69mm
Product Weight	520g