


SN-IPV54/14UDR(III) 1080P Vandal Fixed Network IR Dome Camera



Key features

- 1/2.9" Progressive Scan CMOS
- VF Lens 2.8-12mm
- Full HD 1080P
- Multiple Streams
- IR Range 15-20m
- Low bitrate ,Excellent low light performance
- 3D DNR,dWDR,ICR
- Support ROI,Corridor mode,HLC

Dimension

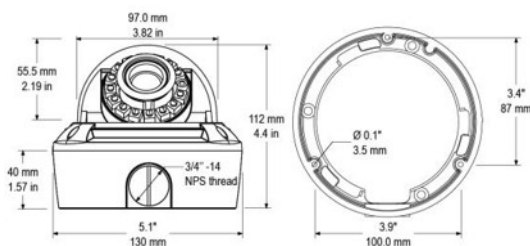

Accessories



Specifications

CAMERA	
Image Sensor	1/2.9" Progressive Scan CMOS
Min. illumination	Color 0.05Lux(AGC ON);BW 0Lux(IR On)
Day & Night	ICR (IR Filter Auto)
Shutter Speed	1/5-1/20000
Auto Iris	Auto
Wide Dynamic Range	WDR
Digital Noise Reduction	2D/3D
Lens	2.8-12mm Varifocal Lens
FOV	89° ~ 35°
IR LED	12pcs, Super Flux LED
IR Range	15-20m
IMAGE	
Video Compression	H.264 High/Main/Baseline Profile, MJPEG
Bit Rate (CBR/VBR)	Main stream:500kb-12000kb ;Sub stream 100kb-6000kb
Audio Compression	G.711 ,RAW_PCM
Max.Resolution	1920x1080/30fps
Dual Stream	Stream1 1920x1080/1280x720 Stream 2 D1 to QVGA
Image Setting	Rotate Mode,Saturation,Brightness,Contrast,Sharpness
HLC	Yes
9:16 Corridor mode	Yes
ROI	Yes
Defog	N/A
NETWORK	
Network Protocols:	HTTP,HTTPS, TCP/IP, IPv4, IPv6, SNMP, UDP/IP, RTSP, DHCP, NTP, PPPoE, IEEE802.1X, Unicast and Multicast supported.
Alarm Trigger	Motion Detection,Network disconnect,Disk alarm,I/O alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware WatchDog
Web Language	English, Chinese, Polish, Italian, Portuguese, Spanish.(Sunell Brand)
System Compatibility	Onvif,CGI,SDK
Interface	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	1ch Audio In,1ch Audio Out
Alarm I/O	1ch Alarm In,1ch Alarm Out
RS485	N/A
BNC Output	1ch, BNC
Reset Button	Yes
Edge Storage	Micro SD/SDHC slot ,Max 32GB
GENERAL	
Power Supply	DC12V/POE IEEE 802.3af
Power Consumption	5W(IR LED OFF); 7W (IR LED ON)
OperatingTemperature	-25℃ ~+55℃
Operating Humidity	0% - 90% RH
Ingress Protection	IP66
Approvals	CE / FCC
Product Dimensions	φ 130×112mm
Product Weight	900g