

# SN-IPV56/41UDR


# 4MP Vandal Network IR Dome



### Key features

- 1/3" Progressive Scan CMOS
- VF Lens 3.0-12mm
- 4MP@15fps,3MP@20fps,1080P@30fps
- Triple Streams
- Smart IR Range Up to 30m
- Low bitrate ,Excellent low light performance
- 3D DNR,dWDR,ICR
- ROI,Defog,HLC,Corridor mode,DIS

### Dimension

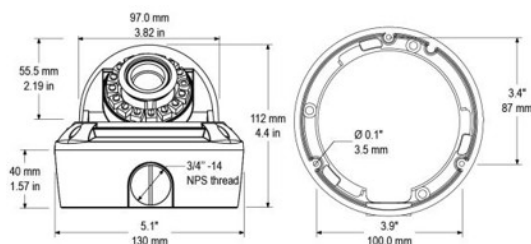

### Accessories



SN-CBK629A SN-CBK633 SN-CBK623 SN-CBK624



SN-CBK627B SN-CBK625 SN-CBK626 SN-CBK633B

### Specifications

CAMERA	
Image Sensor	1/3" Progressive Scan CMOS
Min. illumination	Color:0.05Lux@(F1.2,AGC ON) ; B/W:0Lux@(IR LED ON)
Day & Night	ICR
Shutter Speed	1/5-1/20000
Auto Iris	Default Fixed, Auto Iris Optional
Wide Dynamic Range	dWDR
Digital Noise Reduction	2D/3D
Lens	3.0-12mm VF Lens
FOV	87° ~ 35°
IR LED	12pcs
IR Range	Up to 30m
IMAGE	
Video Compression	H.264 High/Main/Baseline Profile, MJPEG
Bit Rate (CBR/VBR)	Main stream:500kb-12000kb ,Sub stream 100kb-6000kb
Audio Compression	G.711 ,RAW_PCM
Max. Resolution	2688*1512/2560*1440/15fps,2304*1296/20fps,1920x1080/30fps
Stream	Stream1 2688*1512/2560*1440/2304*1296/1920x1080 Stream 2 720p to QVGA
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
HLC	Yes
9:16 Corridor mode	Yes
DIS	Auto
ROI	Yes
Defog	Yes
NETWORK	
Network Protocols:	IPv4,802.1x,HTTP,HTTPS,TCP/IP,UDP/IP,RTSP,DHCP,NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ICMP ,IGMP, Unicast and Multicast
Alarm Trigger	Motion Detection, Line Crossing, Tamper, Area Intrusion, Network disconnect, Disk alarm, I/O alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware Watch Dog
Web Language	English, Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian (Sunell Brand)
System Compatibility	Onvif
INTERFACE	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	Default Not support ,Optional 1ch Audio In&1ch Audio Out
Alarm I/O	Default Not support ,Optional 1ch Alarm In/Out
RS485	N/A
BNC Output	Yes
Reset Button	Yes
Edge Storage	Micro SD/SDHC/SDXC slot ,Max 64GB
GENERAL	
Power Supply	DC12V/POE/AC24V
Power Consumption	3W(IR LED OFF); 5W (IR LED ON)
Operating Temperature	Starting Temperature: -30 °C~ 60 °C (-22 °F ~ 140 °F) Working Temperature:-40 °C ~ 60 °C (-40 °F ~ 140 °F)
Operating Humidity	0% - 90% RH
Ingress Protection	IP67,IK10
Approvals	CE / FCC
Product Dimensions	φ 130*112mm
Product Weight	900g