

SN-IPV57/20UDR


1080P Starlight Vandal Network IR Dome



Key features

- 1/2.8" Progressive Scan CMOS
- VF Lens 2.7-12mm
- 50fps/60fps@1080P(1920*1080)
- Triple Streams
- Smart IR Up to 30m
- Low bitrate ,Excellent low light performance
- WDR,3D DNR
- ROI,Defog,HLC,Corridor mode,DIS
- IP67,IK10

Dimension

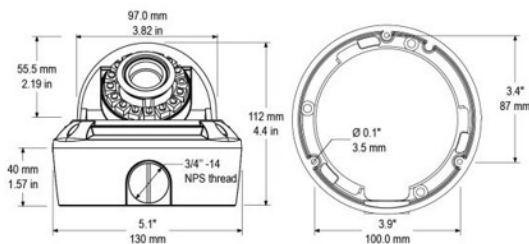

Accessories



SN-CBK629A SN-CBK633 SN-CBK623 SN-CBK624



SN-CBK627B SN-CBK625 SN-CBK626 SN-CBK633B

Specifications

| CAMERA | |
|-------------------------|---|
| Image Sensor | 1/2.8" Progressive Scan CMOS |
| Min. illumination | Color:0.001Lux@(F1.2,AGC ON) ;B/W:0Lux@(IR LED ON) |
| Day & Night | ICR |
| Shutter Speed | 1/5s-1/2000s |
| Auto Iris | Yes |
| Wide Dynamic Range | WDR>120dB |
| Digital Noise Reduction | 2D/3D |
| Lens | 2.7-12mm VF Lens |
| FOV | 105° ~ 35° |
| IR LED | 12pcs |
| IR Range | Up to 30m |
| IMAGE | |
| Video Compression | H.264/265, MJPEG |
| Bit Rate (CBR/VBR) | Main stream:500kb-12000kb ;Sub stream 100kb-6000kb |
| Audio Compression | G.711 ,RAW_PCM |
| Max. Resolution | 1920x1080/60fps |
| Stream | Stream1 1920x1080/1280x720 Stream 2 D1 to QVGA Stream 3 1920x1080/1280x720/D1/VGA/640x360/CIF/QVGA |
| Image Setting | Rotate Mode, Saturation, Brightness, Contrast, Sharpness |
| HLC | Yes |
| 9:16 Corridor mode | Yes |
| DIS | Auto |
| ROI | Yes |
| Defog | Yes |
| NETWORK | |
| Network Protocols: | IPv4,802.1x,HTTP,HTTPS,TCP/IP,UDP/IP,RTSP,DHCP,NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ICMP ,IGMP, Unicast and Multicast |
| Alarm Trigger | Perimeter ,Single Virtual Fences ,Double Virtual Fences ,Loiter ,Multi Loiter ,Object Left ,Object Removed, Abnormal Speed ,Converse, Illegal Parking ,Signal Bad , Motion Detection, Network disconnect, Disk alarm, I/O alarm |
| RTSP Video | Standard RFC2326, Support QuickTime / VLC Player. |
| Security | User security authentication, Reset, Hardware Watch Dog |
| Web Language | English, Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian (Sunell Brand) |
| System Compatibility | Onvif |
| INTERFACE | |
| Ethernet | 1 Ethernet (10/100 Base-T) RJ-45 Connector |
| Audio I/O | 1ch Audio In&1ch Audio Out |
| Alarm I/O | 1ch Alarm In&1ch Alarm Out |
| RS485 | Yes |
| BNC Output | Yes |
| Reset Button | Yes |
| Edge Storage | Micro SD/SDHC/SDXC slot ,Max 128GB |
| GENERAL | |
| Power Supply | DC12V/POE/AC24V |
| Power Consumption | 3W(IR LED OFF); 5W (IR LED ON) |
| Operating Temperature | Starting Temperature: -30 °C~ 60 °C (-22 °F ~ 140 °F) Working Temperature:-40 °C ~ 60 °C (-40 °F ~ 140 °F) |
| Operating Humidity | 0% - 90% RH |
| Ingress Protection | IP67,IK10 |
| Approvals | CE / FCC |
| Product Dimensions | φ 130x112mm |
| Product Weight | 900g |