


SN-NVR10/01E4/004NSEP4(II) 4CH 1HDD SOHO NVR with 4CH POE



Key features

- Up to 4ch 1080P IP cameras access
- Easy to use Same Interface of GUI/WEB/Client
- 1 SATA hard disk up to 6TB
- 1 RJ45 10M/100M network interface
- 4ch POE ports
- Simultaneous HDMI&VGA up to 1080P output
- 2 x 2.0 USB Host
- 1ch Alarm I/O
- 1ch Audio I/O
- Mini friendly design

Dimension

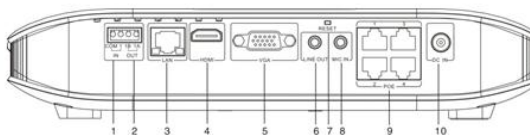

Interface Introduction

1. Alarm Input
2. Alarm Output
3. Network RJ45 10M/100M
4. HDMI Output
5. VGA Output
6. Audio Line Out
7. Reset
8. Audio In
9. POE Ports
10. DC Power Supply

Specifications

VIDEO/AUDIO INPUT	
Video Input	4ch
Incoming Bandwidth	40Mbps ,(main stream 32Mbps ,sub stream 8Mbps)
Outgoing Bandwidth	Total 80Mbps
Audio Input	G711_A/G711_U
VIDEO/AUDIO OUTPUT	
Live View/Playback/Recording Resolution	6MP/5MP/4MP/3MP/1080P/960P/720P/D1/VGA/CIF/QCIF
Frame Rate	6MP/5MP/4MP/3MP@15fps; 1080P@30fps;
Live View/Playback Resolution	Live View: 4ch 1080P/1ch 6MP ,@30fps Playback: 4ch 1080P/1ch 6MP
HDMI/VGA Output	1920x1080/60Hz,1280x720/60Hz,1024x768/60Hz
Audio Output	1ch,Line out
HARD DISK	
SATA HDD	1 SATA interface for 1HDD
Mounting Mode	Embedded
Capacity	Up to 6TB for each disk
NETWORK	
Network Interface	1 RJ45 10M/100M network interface
Protocol	RTP/RTCP,TCP/UDP,HTTP,DHCP,DNS,NTP
POE Interface	4ch 100Mbps ,IEEE802.3af
POE Max Power	36W
INTERFACE	
HDMI/VGA	1ch HDMI, 1ch VGA
USB	USB 2.0 x2
Audio I/O	1ch MIC in,1ch audio line out
Alarm I/O	1ch Alarm output, 1ch Alarm input
Reset Button	Yes
GENERAL	
Power Supply	DC 48V –DC52V,Max Input 70W
Power Consumption	Max 10W(without HDD,USB,POE)
Operating Temperature	-10°C ~ 45°C (14°F ~ 113°F)
Operating Humidity	0% - 90% RH
Chassis	Mini BOX
Product Dimensions	260x175x50mm
Product Weight	700g