

# SN-NVR10/04E3/032NSH


# 32CH 4HDD NVR



### Key features

- Up to 32ch IP cameras access
- Easy to use Same Interface of GUI/WEB/Client
- 4 SATA hard disk each up to 8TB
- 2RJ45 10M/100M/1000M network interface
- Simultaneous HDMI&VGA, up to 4K output
- 2 x 2.0&3.0x1 USB Host
- 16ch Alarm input, 4ch Alarm output
- 1ch Audio I/O

### Dimension

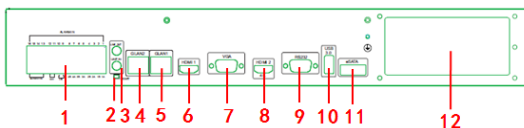

### Interface Introduction

1. Alarm I/O and RS485
2. Reset
3. Audio I/O
4. RJ 45 10M/100M/1000M Network interface
5. RJ 45 10M/100M/1000M Network interface
6. HDMI1 output
7. VGA output
8. HDMI2 4K output
9. RS232 output
10. USB output
11. eSATA output
12. AC110/220V Power Supply

### Specifications

VIDEO/AUDIO INPUT	
Video Input	32ch h.265/h.264
Incoming Bandwidth	256Mbps ,(main stream 192Mbps ,sub stream 64Mbps)
Outgoing Bandwidth	Total 256Mbps
Audio Input	G711_A/G711_U
VIDEO/AUDIO OUTPUT	
Live View/Playback / Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080P/720P/D1/VGA/CIF/QCIF
Frame Rate	8MP/6MP/5MP/4MP/3MP/1080P@30fps;
Live View/Playback Capacity	Live View: 32ch 720p/16ch 1080p/8ch 4MP/4ch 8MP @30fps; Playback: 4ch 8MP/6MP/5MP/4MP/3MP/1080P/720P
HDMI/VGA Output	HDMI1:1920x1080/60Hz,1280x720/60Hz,1024x768/60Hz HDMI2:3840x2160/60Hz,1920x1080/60Hz,1280x720/60Hz,1024x768/60Hz,VGA :1920x1080/60Hz,1280x720/60Hz,1024x768/60Hz
Audio Output	1ch,Line out
HARD DISK	
SATA HDD	4 SATA interface for 4HDD
Mounting Mode	Embedded
Capacity	Up to 8TB for each disk
NETWORK	
Network Interface	2 RJ45 10M/100M/1000M
Protocol	RTP/RTCP,TCP/UDP,HTTP,DHCP,DNS,NTP
POE Interface	N/A
POE Max Power	N/A
INTERFACE	
HDMI/VGA	2ch HDMI, 1ch VGA
USB	USB 2.0 x2,USB 3.0 x1
Audio I/O	1ch MIC in,1ch audio line out
Alarm I/O	16ch Alarm input, 4ch Alarm output
Reset Button	Yes
GENERAL	
Power Supply	AC110/220V
Power Consumption	Max 15W(without HDD,USB,POE)
Operating Temperature	-10°C ~ 45°C (14°F ~ 113°F )
Operating Humidity	0% - 90% RH
Chassis	1.5U
Product Dimensions	440x376x67mm
Product Weight	4.2kg (No disk)