

SN-IPC56/40EDN


4MP Network Box Camera



Key features

- 1/3" Progressive Scan CMOS
- 4MP Resolution
- Triple Streams, Triple Power Supply
- Low bitrate ,Excellent low light performance
- 3D DNR,dWDR,ICR
- ROI,Defog,HLC,Corridor mode,DIS
- Built-in Microphone
- Built-in SD/SDHC/SDXC slot
- Multiple Video Analytics

Dimension

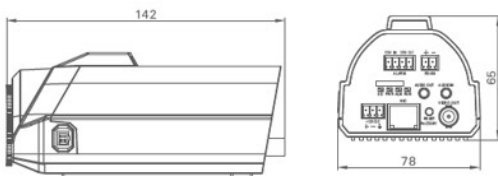

Accessories



SN-CH302HF



SN-BK314

Specifications

CAMERA	
Image Sensor	1/3" Progressive Scan CMOS
Min. illumination	Color 0.05Lux(AGC ON); B&W 0.005Lux(AGC ON)
Day & Night	ICR
Shutter Speed	1/5-1/20000
Auto Iris	Yes
Wide Dynamic Range	dWDR
Digital Noise Reduction	2D/3D
Lens	N/A
FOV	N/A
IR LED	N/A
IR Range	N/A
IMAGE	
Video Compression	H.264 High/Main/Baseline Profile, MJPEG
Bit Rate (CBR/VBR)	Main stream:500kb-12000kb ;Sub stream 100kb-6000kb
Audio Compression	G.711 ,RAW_PCM
Max. Resolution	2688*1512/2560*1440/20fps,2304*1296/25fps,1920*1080/30fps
Stream	Stream1 2688*1512/2560*1440/2304*1296/1920*1080 Stream 2 720p to QVGA
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
HLC	Yes
9:16 Corridor Mode	Yes
DIS	Auto
ROI	Yes
Defog	Yes
NETWORK	
Network Protocols:	IPv4,802.1x,HTTP,HTTPS,TCP/IP,UDP/IP,RTSP,DHCP,NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ICMP ,IGMP, Unicast and Multicast
Alarm Trigger	Default Base: Motion Detection, Line Crossing, Tamper, Area Intrusion, Network disconnect, Disk alarm Optional Advance: Motion Detection, Line Crossing, Tamper, Area Intrusion, Camera Move, Dwell, Multiple Dwell, Retrograde Detection, Object Left, Object Remove, Abnormal Speed, Illegal Parking, Network disconnect, Disk alarm ,I/O alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware Watch Dog
Web Language	English, Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian (Sunell Brand)
System Compatibility	Onvif
INTERFACE	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Microphone	Yes (Built-in)
Audio I/O	1ch Audio In,1ch Audio Out
Alarm I/O	1ch Alarm In,1ch Alarm Out
RS485	Yes
BNC Output	Yes
Reset Button	Yes
Edge Storage	Micro SD/SDHC/SDXC slot ,Max 64GB
GENERAL	
Power Supply	AC24V/DC12V/POE
Power Consumption	3W(MAX)
Operating Temperature	Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F)
Operating Humidity	0% - 90% RH
Ingress Protection	N/A
Approvals	CE / FCC
Product Dimensions	142mm(D)x78mm(W)x65mm(H)
Product Weight	390g