

# Network Video Recorder

## NVR201 Series



### Key Features


- Support H.264 video formats
- Support AHD, TVI, CVI, CVBS, IP cameras with adaptive access
- 4/8-channel BNC input
- Up to 5MP resolution for recording
- Support 1-ch HDMI, 1-ch VGA output at up to 1920\*1080P
- Long transmission distance over coax cable

### Specifications


Model	NVR201-04U	NVR201-08Q
<b>Video/Audio Input</b>		
Analog Video Input	4-ch, BNC	8-ch, BNC
IP Video Input	2-ch (only IP up to 6ch)	2-ch (only IP up to 10ch)
Supported Analog Camera Types	Support AHD input: 5MP, 4MP, 3MP, 1080P/30 Hz, 1080P/25 Hz, 720P/30 Hz, 720P/25 Hz, Support TVI input: 5MP, 3MP, 1080P/30 Hz, 1080P/25 Hz, 720P/30 Hz, 720P/25 Hz Support CVI input: 1080P/25Hz, 1080P/30Hz, 720P/25Hz, 720P/30Hz Support CVBS input	Support AHD input: 3MP, 1080P/30 Hz, 1080P/25 Hz, 720P/25 Hz, 720P/30 Hz Support TVI input: 3MP, 1080P/30 Hz, 1080P/25 Hz, 720P/25 Hz, 720P/30 Hz Support CVI input: 1080P/25Hz, 1080P/30Hz, 720P/25Hz, 720P/30Hz Support CVBS input
Audio Input	4-ch, RCA	
Two-way Audio Input	1-ch, RCA	
<b>Network</b>		
Incoming Bandwidth	40Mbps	

Outgoing Bandwidth	40Mbps	
Remote Users	128	
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE	
<b>Video/Audio Output</b>		
CVBS Output	/	1-ch, BNC
HDMI/VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
Recording Resolution	5MP/4MP/3MP/1080p/720p/960H/4CIF/CIF/QCIF	3MP/1080p/720p/960H/4CIF/CIF/QCIF
Frame Rate	Mainstream: 5MP@10fps/4MP@12fps/3MP@16fps/1080P@25fps/720P@30fps/960H@30fps  Sub stream: 960H/D1@16fps CIF/QCIF@25fps/30fps	Main stream: 3MP@8fps/1080p@12fps/720@30fps/960H@30fps  Sub stream: 960H/D1@12fps CIF/QCIF@25fps/30fps
Audio Output	1-ch, RCA	
Synchronous Playback	6-ch	10-ch
<b>Decoding</b>		
Decoding format	H.264	
Live View/ Playback	8MP(IP)/5MP/4MP/3MP/1080p/720p/960H/4CIF/CIF/QCIF	8MP(IP)/3MP/1080p/720p/960H/4CIF/CIF/QCIF
<b>Hard Disk</b>		
SATA	1 SATA interface	
Capacity	Up to 8TB for each HDD	
<b>External Interface</b>		
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interfaces	
Serial Interface	1 x RS485	
USB Interface	Rear panel: 1 x USB2.0,Front panel: 1xUSB2.0	
<b>General</b>		
Power Supply	12V DC Power Consumption: ≤ 5 W( without HDD )	
Working Environment	-10°C ~ + 55°C ( +14°F ~ +131°F ), Humidity ≤ 90% RH(non-condensing)	
Dimensions(WxD×H)	260mm × 240mm× 44mm (10.2" × 9.4"×1.7")	
Weight ( without HDD )	≤ 1.12 Kg ( 2.47 lb )	

## Dimensions

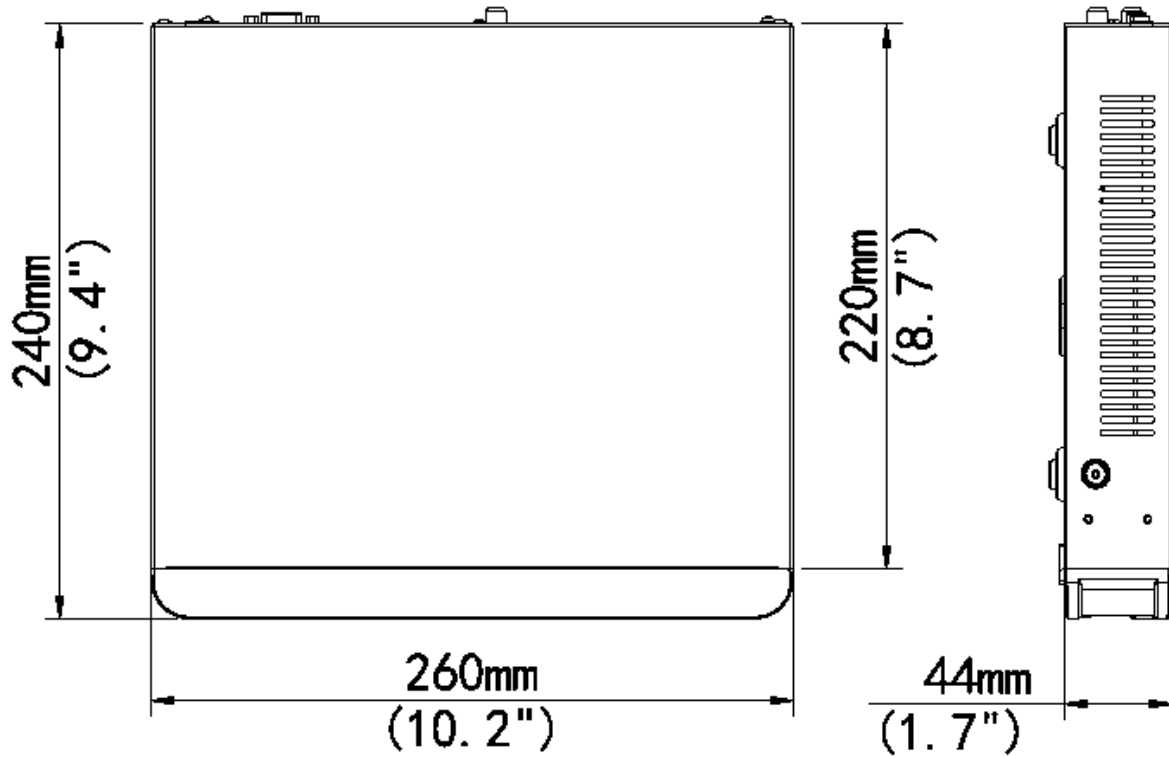

## Rear Panel

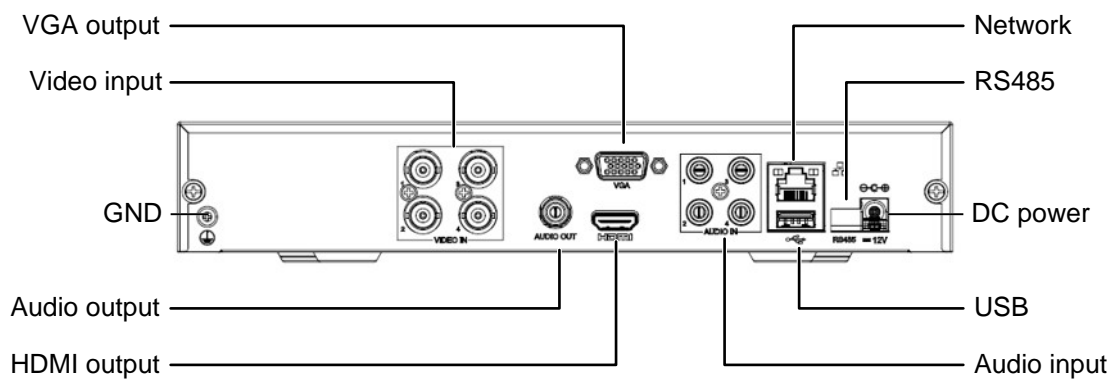

**Zhejiang Uniview Technologies Co.,Ltd.**

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2018 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.