

Network Video Recorder

NVR302-E-P-B Series



Key Features


- 8/16-channel input
- Third-party IP cameras supported with ONVIF conformance
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- Up to 12 Megapixels resolution recording
- Support H.265/H.264 video formats
- Accurate retrieval, instant playback
- Up to 8TB for each disk
- Support various VCA detection alarm and VCA search
- Dewarping support for fisheye cameras
- Plug & Play with up to 8/16 independent PoE network interfaces
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access

Specifications

| Model | NVR302-08E-P8-B | NVR302-16E-P8-B | NVR302-16E-P16-B |
|---------------------------|---|---|------------------|
| Video/Audio Input | | | |
| IP Video Input | 8-ch | 16-ch | |
| Two-way Audio Input | 1-ch, RCA | | |
| Network | | | |
| Incoming Bandwidth | 80Mbps | 160Mbps | |
| Outgoing Bandwidth | 160Mbps | 320Mbps | |
| Remote Users | 128 | | |
| Video/Audio Output | | | |
| HDMI/VGA Output | VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz | | |
| Recording Resolution | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | | |
| Audio Output | 1-ch, RCA | | |
| Synchronous Playback | 8-ch | 16-ch | |
| Decoding | | | |
| Compression | H.265/H.264 | | |
| Live view/ Playback | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | | |
| Capability | 3 x 12MP@25, 4 x 4K@30, 8 x 4MP@30, 16 x 1080P@30 | | |
| Hard Disk | | | |
| SATA | 2 SATA interfaces | | |
| Capacity | up to 8TB for each disk | | |
| External Interface | | | |
| Network Interface | 1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface | | |
| USB Interface | Front panel: 1 x USB2.0, Rear panel: 1 x USB3.0 | | |
| Alarm In | 4-ch | | |
| Alarm Out | 1-ch | | |
| PoE | | | |
| Interface | 8 independent 100 Mbps PoE network interfaces | 16 independent 100 Mbps PoE network interfaces | |
| Max Power | Max 30W for single port Max 130W in total (16.25W for each) | Max 30W for single port Max 240W in total (15W for each) | |
| Supported Standard | IEEE 802.3af/at | | |
| General | | | |
| Power Supply | 100 ~ 240 V AC | | |


| | | |
|-----------------------------|-----------------------------------|--------------------|
| Consumption (without HDD) | ≤ 20 W | |
| Working Temperature | -10°C ~ + 55°C (+14°F ~ +131°F) | |
| Working Humidity | 10% ~ 90% | |
| Dimensions | 380 mm × 315mm × 46 mm | |
| Weight (without HDD) | ≤2.42kg (5.34lb) | ≤2.48kg (5.47lb) |

Dimensions

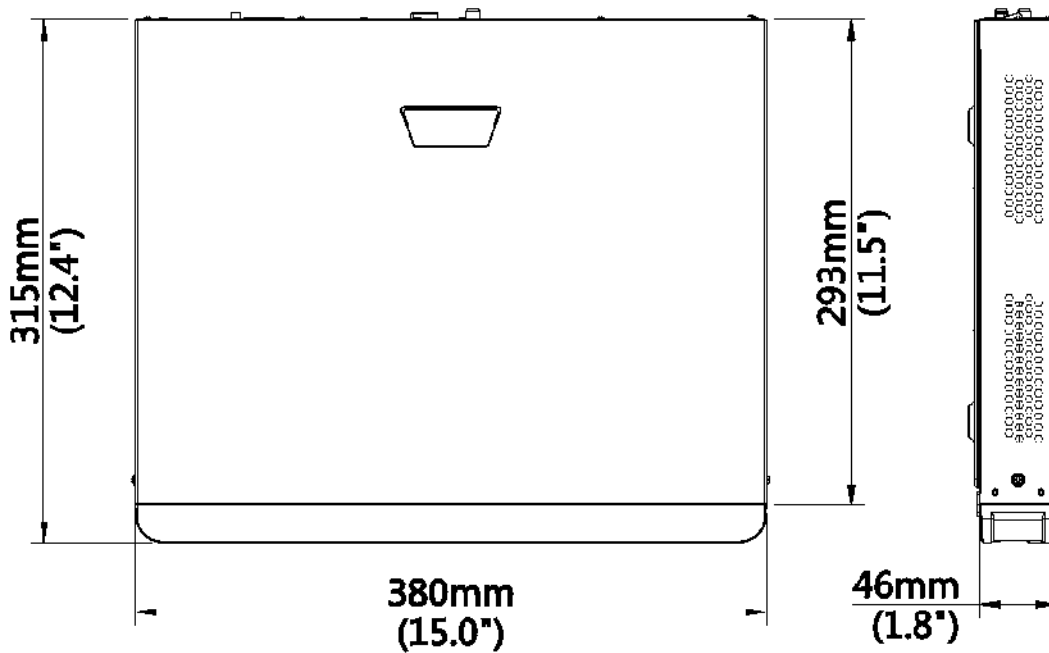

Rear Panel

Take **NVR302-16E-P8-B** for example

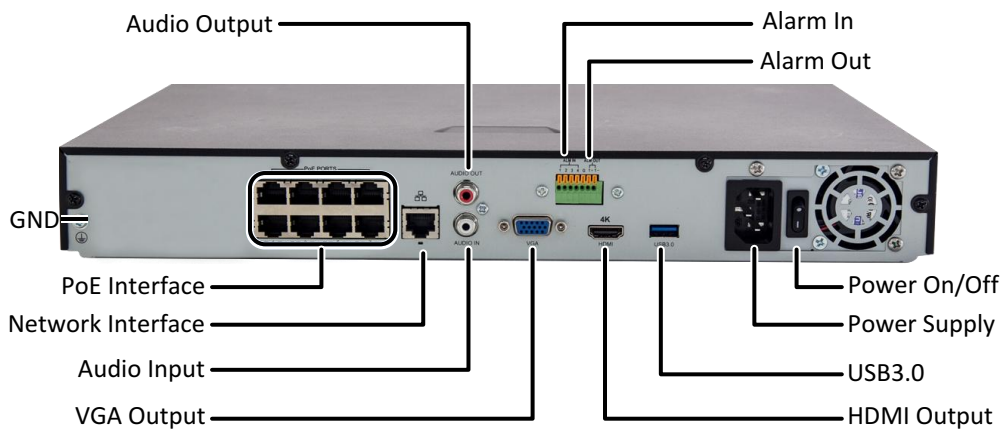

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://sgcdn.uniview.com>

©2016-2017 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.