



FD836B-HTV/EHTV



FD836B-HVF2/EHVF2

Fixed Dome Network Camera



2MP · SNV · WDR · 30M IR · P-iris · Remote Focus · IP66 · IK10 · 3DNR ·
Smart Stream · Smart IR · Video Rotation · Extreme Weather · Defog

VIVOTEK's FD836B-HV range is a series of robust, dome-style network cameras designed for diverse outdoor applications and offering a broad range of options. Equipped with a Full HD sensor enabling viewing resolution of 1920x1080 at a smooth 30 fps, the FD836B-HV series are all-in-one outdoor cameras capable of capturing high quality and high resolution video at up to 2 Megapixels whether in high contrast or low light with WDR and SNV technology.

Further increasing its flexibility, VIVOTEK's FD836B-HV series provides options for both fixed focus for simple operation without extra electrical power, and remote focus with built-in stepping motors and P-iris to provide precise adjustment remotely.

To meet the demands of any harsh outdoor application, VIVOTEK's FD836B-HV series is also armed with IP66-rated housing to help the camera body withstand rain, dust and high pressure water jets from any direction, while its IK10-rated housing provides robust protection against acts of vandalism or other impacts.


Finally, a wide operating temperature range further enhances the FD836B-HV's performance and reliability in extremely cold or hot weather, even when using PoE. When choosing VIVOTEK FD836B-HV series, customers will be offered four options: the FD836B-HVF2, FD836B-EHVF2, FD836B-HTV, and FD836B-EHTV. Different options can be chosen based on the requirements of your application, such as the need for a specific focusing method or operating environment temperature.

Key Features

- 2-Megapixel CMOS Sensor
- 30 fps @ 1920x1080
- 2.8 ~ 12 mm, Vari-focal, Remote Focus, P-iris Lens (FD836B-HTV/EHTV)
- Built-in IR Illuminators, Effective up to 30 Meters
- WDR for Unparalleled Visibility in Extremely Bright and Dark Environments
- SNV (Supreme Night Visibility) for Low-light Conditions
- 3D Noise Reduction
- Two-way Audio
- Video Rotation for Corridor View
- Weather-proof IP66-rated and Vandal-proof IK10-rated Housing
- Support Installation with AM-713 Outdoor Conduit Box
- Extreme Weather Support with PoE (FD836B-EHVF2/EHTV)
- VIVOTEK VCA (Video Content Analysis) Support



VIVOTEK SNV Camera - Show you true colors at night

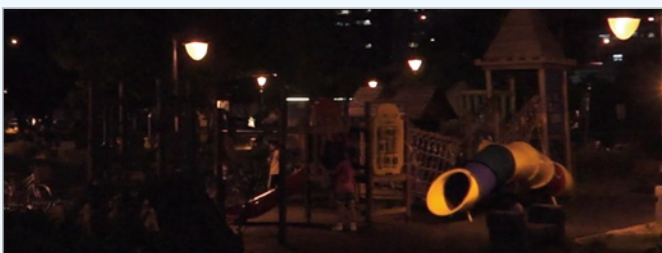

Ordinary Camera




Low Light



Parking Lot




Train Station



Hotel

Technical Specifications

Model	FD836B-HTV: Vari-focal, P-iris, Remote Focus FD836B-EHTV: Vari-focal, P-iris, Remote Focus, Extreme Weather FD836B-HVF2: Fixed-focal FD836B-EHVF2: Fixed-focal, Extreme Weather	Interface	10 Base-T/100 BaseTX Ethernet (RJ-45) *It is highly recommended to use standard CAT5e & CAT6 cables which are compliant with the 3P/ETL standard.
System Information		ONVIF	Supported, specification available at www.onvif.org
CPU	Multimedia SoC (System-on-Chip)	Intelligent Video	
Flash	1Gb	Video Motion Detection	Five-window video motion detection
RAM	2Gb	VCA	Line crossing detection, field detection, loitering detection *Available per project request.
Camera Features		Alarm and Event	
Image Sensor	1/2.8" Progressive CMOS	Alarm Triggers	Motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection, audio detection
Maximum Resolution	1920x1080 (2MP)	Alarm Events	Event notification using digital output, HTTP, SMTP, FTP, NAS server and SD Card File upload via HTTP, SMTP, FTP, NAS server and SD card
Lens Type	FD836B-HTV/FD836B-EHTV: Vari-focal FD836B-HVF2/FD836B-EHVF2: Fixed-focal	General	
Focal Length	FD836B-HTV/FD836B-EHTV: f = 2.8 ~ 12 mm FD836B-HVF2/FD836B-EHVF2: f = 2.8 mm	Smart Focus System	FD836B-HTV/FD836B-EHTV: Remote Focus
Aperture	FD836B-HTV/FD836B-EHTV: F1.8 ~ F2.85 FD836B-HVF2/FD836B-EHVF2: F1.8	Connectors	RJ-45 cable connector for Network/PoE connection Audio input Audio output DC 12V power input Digital input*1 Digital output*1
Auto-iris	P-iris (FD836B-HTV/FD836B-EHTV)	LED Indicator	System power and status indicator
Field of View	FD836B-HTV/FD836B-EHTV: 42° ~ 105° (Horizontal) 24° ~ 57° (Vertical) 49° ~ 131° (Diagonal) FD836B-HVF2/FD836B-EHVF2: 110° (Horizontal) 64° (Vertical) 135° (Diagonal)	Power Input	DC 12V FD836B-HTV/-HVF2: IEEE 802.3af/at PoE Class 0 FD836B-EHTV/-EHVF2: IEEE 802.3at PoE Class 4
Shutter Time	1/5 sec. to 1/32,000 sec.	Power Consumption	FD836B-HTV: Max. 13 W FD836B-EHTV: Max. 25 W (Heater on) FD836B-HVF2: Max. 9 W FD836B-EHVF2: Max. 25 W (Heater on)
WDR Technology	WDR	Dimensions	Ø 155 x 103 mm
Day/Night	Removable IR-cut filter for day & night function	Weight	920 g
Minimum Illumination	FD836B-HTV/FD836B-EHTV: 0.03 Lux @ F1.8 (Color) 0.001 Lux @ F1.8 (B/W) FD836B-HVF2/FD836B-EHVF2: 0.06 Lux @ F1.8 (Color) 0.001 Lux @ F1.8 (B/W)	Casing	Weather-proof IP66-rated housing Vandal-proof IK10-rated metal housing
Pan/tilt/zoom Functionalities	ePTZ: 48x digital zoom (4x on IE plug-in, 12x built in)	Safety Certifications	FD836B-HTV/-EHTV: CE, LVD, FCC Class A, VCCI, C-Tick, UL FD836B-HVF2/-EHVF2: CE, LVD, FCC Class A, VCCI, C-Tick
IR Illuminators	Built-in IR illuminators, effective up to 30 meters with Smart IR IR LED*8	Operating Temperature	FD836B-HVF2/FD836B-HTV: Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F) FD836B-EHVF2/FD836B-EHTV: Starting Temperature: -40°C ~ 50°C (-40°F ~ 122°F) Working Temperature: -50°C ~ 50°C (-58°F ~ 122°F)
On-board Storage	Slot type: Micro SD/SDHC/SDXC card slot Seamless Recording	Warranty	36 months (FD836B-HTV/FD836B-EHTV) 24 months (FD836B-HVF2/FD836B-EHVF2)
Video		System Requirements	
Compression	H.264 & MJPEG	Operating System	Microsoft Windows 7/8/Vista/XP/2000
Maximum Frame Rate	30 fps @ 1920x1080 In both compression modes	Web Browser	Mozilla Firefox 7~43 (streaming only) Internet Explorer 7/8/9/10/11
Maximum Streams	4 simultaneous streams	Other Players	VLC: 1.1.11 or above Quicktime: 7 or above
S/N Ratio	58 dB	Included Accessories	
Dynamic Range	100 dB	CD	User's manual, quick installation guide, Installation Wizard 2
Video Streaming	Adjustable resolution, quality and bitrate; Smart Stream	Others	Quick installation guide, warranty card, alignment sticker/ desiccant bag, screw pack
Image Settings	Adjustable image size, quality and bit rate, Time stamp, text overlay, flip & mirror, Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks, Scheduled profile settings, 3D noise reduction, video rotation, defog	Dimensions	
Audio			
Audio Capability	Two-way Audio (full duplex)		
Compression	G.711, G.726		
Interface	External microphone input External line output		
Network			
Users	Live viewing for up to 10 clients		
Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, UDP, ICMP, ARP, SSL, TLS		

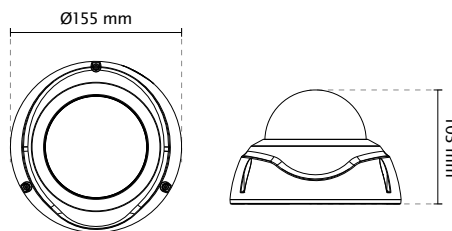

Compatible Accessories

Mounting Kits



AM-21A
L Shape Bracket



AM-51C (v01)
Adapter Ring



AM-525 (v01)
Mounting Adapter



AM-713
Conduit Box

PoE Kits



AP-FXC-0250
Outdoor 2-Port FE PoE Extender