

DH-PTZ1C200UE-GN

2MP Starlight IR PT Network Camera



- 1/2.8" 2Megapixel STARVIS™ CMOS
- Starlight technology
- Max. 25/30fps@1080P
- WDR
- IVS
- H.265 Encoding
- Support POE
- IR distance up to 20m
- IP66



System Overview

Accurate pan/tilt performance, the camera provides a wide monitoring range and great detail. The camera delivers 1080P resolution at 25/30fps. The camera is equipped with smooth control, high quality image, and good protection, meeting compact size demands of video surveillance applications.

Functions

Starlight Technology

For challenging low-light applications, Dahua's Starlight Ultra-low Light Technology offers best-in-class light sensitivity, capturing color details in low light down to 0.005 lux. The camera uses a set of optical features to balance light throughout the scene, resulting in clear images in dark environments.

Environmental

Dahua cameras operate in extreme temperature environments, rated for use in temperatures from -30°C to +60 °C (-22 °F to +140°F) with 95% humidity. Subjected to rigorous dust and water immersion tests and certified to the IP66 Ingress Protection rating makes it suitable for demanding outdoor applications.

Protection

The camera allows for 4KV lightning rating, which provides effective protection for both the camera and its structure against lightning.

Interoperability

The camera conforms to the ONVIF (Open Network Video Interface Forum) specifications, ensuring interoperability between network video products regardless of manufacturer.

Wide Dynamic Range

The camera achieves vivid images, even in the most intense contrast lighting conditions, using industry-leading wide dynamic range (WDR) technology. For applications with both bright and low lighting conditions that change quickly, True WDR (120 dB) optimizes both the bright and dark areas of a scene at the same time to provide usable video.

Smart H.265+

Smart H.265+ is the optimized implementation of the H.265 codec that uses a scene-adaptive encoding strategy, dynamic GOP, dynamic ROI, flexible multi-frame reference structure and intelligent noise reduction to deliver high-quality video without straining the network. Smart H.265+ technology reduces bit rate and storage requirements by up to 70% when compared to standard H.265 video compression.

Technical Specification							Video Bit Rate		H.264: 216Kbps–8192Kbps H.265: 108Kbps–8192Kbps	
Camera							Day/Night		ICR	
Image Sensor		1/2.8" STARVIS™ CMOS					BLC		Support	
Max. Resolution		2MP					WDR		120dB	
Effective Pixels		1920 (H) × 1080 (V)					HLC		Support	
ROM		128MB					White Balance		Auto/Indoor/Outdoor/Tracking/Manual/Sodium lamp/ Natural/Street lamp	
RAM		256MB					Gain Control		Auto/Manual	
Electronic Shutter Speed		1/3–1/30000s					Noise Reduction		2D/3D	
Minimum Illumination		Color: 0.005Lux@F2.0 B/W: 0.0005Lux@F2.0 0 Lux (IR light on)					Motion Detection		Support	
IR Distance		20m (65.6ft)					Region of Interest (RoI)		Support	
IR On/Off Control		Manual/SmartIR					Electronic Image Stabilization		Support	
IR LED Number		1					Defog		Electronic Defog	
Lens							Digital Zoom		16x	
Focal Length		3.6mm					Audio			
Aperture		F2.0					Audio Compression		G.711A; G.711Mu; G.726; AAC; MPEG2-Layer2; G.722.1; G.729	
Field of View		H: 84.22°; V: 45.8°					Audio In		1	
Close Focus Distance		0.9m					Audio Out		1	
Iris Control		Fixed Iris					Network			
DORI Distance	Lens	Detect	Observe	Recognize	Identify		Ethernet Port		1 RJ-45 Port 10/100Base-T	
	2.8mm	43.6 m (143.04 ft)	17.4 m (57.09 ft)	8.7 m (28.54 ft)	4.4 m (14.44 ft)		Network Protocol		IPv4; IPv6; HTTP; HTTPS; 802.1x; Qos; FTP; SMTP; UPnP; SNMP; DNS; DDNS; NTP; SNMPv1/v2c/ v3(MIB-2); ARP; RTCP; RTSP; RTP; TCP; UDP; IGMP; ICMP; DHCP; PPPoE	
	3.6mm	55.2 m (181.10 ft)	22.1 m (72.51 ft)	11.0 m (36.09 ft)	5.5 m (18.04 ft)		Interoperability		ONVIF; CGI	
PTZ							Streaming Method		Unicast/Multicast	
Pan/Tilt Range		Pan: 0°–180°; Tilt: -5°–55°					User/Host		20 (Total bandwidth 48M)	
Manual Control Speed		Pan: 6°/s; Tilt: 3°/s					Edge Storage		FTP; Micro SD card (256G); P2P	
Intelligence							Browser		IE7 and newer versions Chrome 42 and older versions Firefox 52 and older versions Safari	
IVS		Tripwire; Intrusion; Object Abandoned/Missing					Management Software		Smart player Configtool SMART PSS DMSS DSS	
Advanced Intelligence		Face Detection; Heat Map					Certifications			
Video							Certifications		CE: EN55032/EN55024/EN50130-4 FCC: Part15 subpartB,ANSI C63.4- 2014	
Video Compression		H.265; H.264BaselineProfile; H.264MainProfile; H.264HighProfile; MJPEG; H.265 +; H.264+					Electrical			
Streaming Capability		3 Streams					Power Supply		DC12V/1.5A±10% (optional) POE (802.3af) (optional)	
Resolution		1080P (1920 ×1080); 1.3M (1280×960); 720P (1280 × 720); D1 (704 × 576); CIF (352 × 288)					Power Consumption		7W 11W (PTZ, IR light)	
Video Frame Rate		Main Stream: 1080P/1.3M/720P(1–25/30fps) Sub Stream 1: D1/CIF(1–25/30fps) Sub Stream 2: 720P/D1/CIF(1–25/30fps)					Environmental			
Bit Rate Control		Variable Bit Rate/Constant Bit Rate					Operating Conditions		–30°C to +60°C (–22°F to 140°F)	

Operating Humidity	≤95% RH
Ingress Protection	IP66; TVS 4000V lightning protection; surge protection

Construction

Housing Material	Aluminium alloy ADC12
Dimensions	Wall mounted: 195.3 mm×90 mm×102.7 mm (7.69"×3.54"×4.04") Ceiling mounted: 190.8 mm×90 mm×112.2 mm (7.51"×3.54"×4.42")
Weight	Net Weight: 0.9 kg (1.98 lb); Gross Weight: 1.2 kg (2.65 lb)

Ordering Information

Type	Model	Description
2MP PTZ Camera	DH-PTZ1C200UE-GN	2MP Starlight IR PT Network Camera, WDR, PAL
	DH-PTZ1C200UEN-GN	2MP Starlight IR PT Network Camera, WDR, NTSC
	PTZ1C200UE-GN	2MP Starlight IR PT Network Camera, WDR, PAL
	PTZ1C200UEN-GN	2MP Starlight IR PT Network Camera, WDR, NTSC
Accessories	PFA731	Junction Box (wall-mount)
	DC12V/2A	Power Adapter

Accessories

Optional:





PFA731
Junction Box
(wall-mount)



DC12V/2A
Power Adapter

Dimensions (mm/inch)

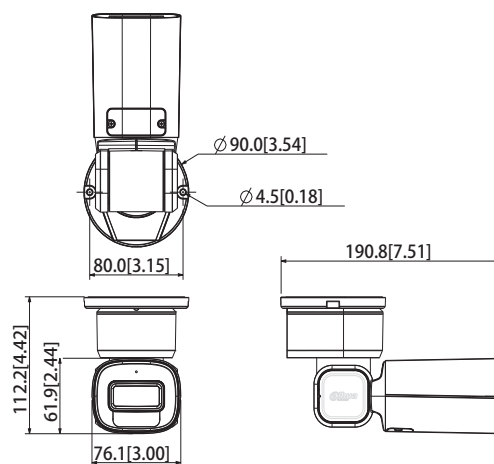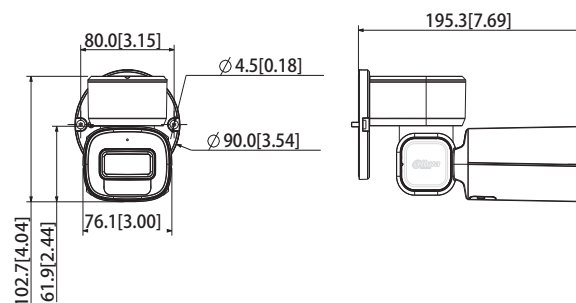

Ceiling Mount	Wall Mount	Wall Mount PFA731 Junction Box