

DP-22E16D1T-IT1/IT3/IT5

HD1080P EXIR Bullet Kamera

TURBO HD




EXIR



Key features

- HD1080P Video Output
- Adopt HDTV Technology
- True Day/Night, Smart IR
- EXIR technology, 20/40/80m IR distance
- IP66 weatherproof
- OSD menu controlled via UTC

Dimensions

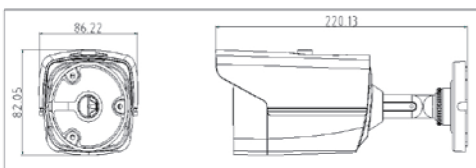

	DP-22E16D1T-IT1	DP-22E16D1T-IT3	DP-22E16D1T-IT5
Camera			
Image Sensor	1 / 3" Progressive Scan CMOS	1 / 2.7" Progressive Scan CMOS	1 / 2.7" Progressive Scan CMOS
Signal System	PAL / NTSC		
Effective Pixels	1930(H)*1088(V)		
Min. Illumination	0.1 Lux @(F1.2,AGC ON), 0 Lux with IR		
Shutter speed	1/25(1/30) s to 1/50,000 s		
Lens	2.8mm	3.6mm (6mm optional)	3.6mm (6mm, 8mm, 12mm, 16mm optional)
	Angle of View: 90°(2.8mm)	Angle of View: 80°(3.6mm), 55.4°(6mm)	Angle of View: 80°(3.6mm), 55.4°(6mm), 41.6°(8mm), 26.6°(12mm), 20.6°(16mm)
Lens Mount	M12		
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°		
Day & Night	ICR		
Synchronization	Internal synchronization		
Video Frame Rate	1080p@25fps/1080p@30fps		
HD Video Output	1 Analog HD output		
S / N Ratio	More than 52dB		
Menu			
Camera ID	On/off (0-255)		
AGC	Support		
D/N Mode	Color/ BW/ Auto/ EXT		
White Balance	Auto/ User/ Push/ 8000K/ 6000K/ 4200K/ 3000K		
Privacy Mask	On/Off, maximum 2 zones		
Motion Detection	On/Off, maximum 4 zones		
BLC	Support		
Anti-flicker	On/off		
Language	English/ Chinese		
Function	Digital noise reduction, Mirror		
General			
Working Temperature / Humidity	-40 °C – 60 °C (-40 °F – 140 °F) Humidity 90% or less (non-condensing)		
Power Supply	12 VDC		
Power Consumption	Max. 3W		Max. 4.5W
Weather Proof Ratings	IP66		
IR Range	Up to 20m	Up to 40m	Up to 80m
Communication	Up the coax Protocol: HIKVISION-C(Coaxitron)		
Dimensions	86.22×82.05×220.13mm(3.39" ×3.23" ×8.67")		
Weight	430 g (0.95 lb)		